

IB18A769

Inductive sensors • Norm switching distance

sensor inductive, M18x1 48long, Quasi-flat, Sn: 8, 10-30V DC, PNP NO, Connector M12, IP67, Brass Chrome-plated

including 2x Nut



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

Electrical features

Type of switching function	Normally open contact (NO)
Type of electrical connection	Connector M12
Type of switching output	PNP
Rated switching current	200mA
Relative hysteresis	10%
Short-circuit protection	Yes
No-load current	10mA
Residual ripple	20%
Switching distance	8mm
Switching frequency	1000Hz
Voltage drop	2V
Reverse polarity protection	Yes
Operating voltage (DC)	10 - 30V

Mechanical features

Alignment of cable entry	axial
Design	Cylinder, screw-thread
Thread pitch	1mm
Cable infeed	axial
Length	48.5mm
Mechanical mounting condition for sensor	semi-flush
Surface	Chrome-plated
Degree of protection (IP)	IP67
Active area material of sensor	Plastic (PA6.6)
Housing material	Brass
Thread dimension	M18
Ambient temperature	-25 - 75°C

Other features

Reference medium / object	Standard measuring plate FE360 24x24x1mm
Ambient temperature	-25 - 75°C


Classification

ETIM 8	EC002714 Inductive proximity switch
--------	-------------------------------------

More

IPF Product Group	201 inductive sensors (plus / super plus)
packaging dimensions	123 x 77 x 25 mm
gross weight	60 g
Customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

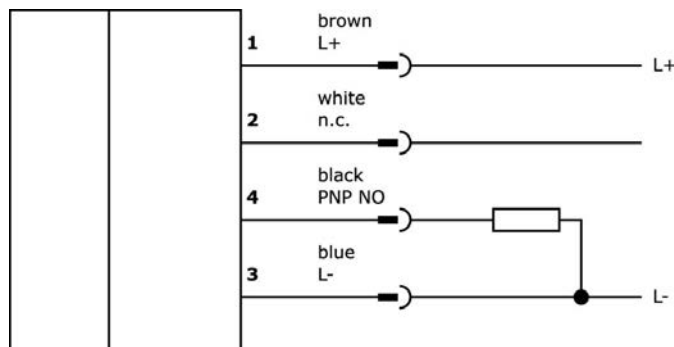

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.