

Automation systems Drive solutions

Controls
Inverters
Motors
Gearboxes
Engineering tools

Contents of the L-force catalogue

AbN
automation

About Lenze	Lenze makes many things easy for you. A matter of principle: the right products for every application. L-force product portfolio																									
Automation systems	Controller-based Automation Drive-based automation	1.1 1.2																								
Drive solutions	HighLine tasks StateLine tasks BaseLine tasks	2.1 2.2 2.3																								
Controls	<table><tr><td>Cabinet Controller</td><td>Controller 3200 C I/O system 1000</td><td>3.1 3.2</td></tr><tr><td>Panel Controller</td><td>Controller p500 Monitor panel</td><td>3.3 3.4</td></tr></table>	Cabinet Controller	Controller 3200 C I/O system 1000	3.1 3.2	Panel Controller	Controller p500 Monitor panel	3.3 3.4	3.1 3.2 3.3 3.4																		
Cabinet Controller	Controller 3200 C I/O system 1000	3.1 3.2																								
Panel Controller	Controller p500 Monitor panel	3.3 3.4																								
Inverters	<table><tr><td rowspan="2">Decentralised</td><td>Inverter Drives 8400 protec</td><td>4.1</td></tr><tr><td>Inverter Drives 8400 motec</td><td>4.2</td></tr><tr><td rowspan="10">Cabinet</td><td>Inverter Drives SMV IP65</td><td>4.3</td></tr><tr><td>Servo Drives 9400 HighLine</td><td>4.4</td></tr><tr><td>Inverter Drives 8400 TopLine</td><td>4.5</td></tr><tr><td>Servo-Inverters i700</td><td>4.6</td></tr><tr><td>Inverter Drives 8400 HighLine</td><td>4.7</td></tr><tr><td>Inverter Drives 8400 StateLine</td><td>4.8</td></tr><tr><td>Inverter Drives SMV IP31</td><td>4.9</td></tr><tr><td>Inverter Drives 8400 BaseLine</td><td>4.10</td></tr><tr><td>Inverter Drives smd</td><td>4.11</td></tr></table>	Decentralised	Inverter Drives 8400 protec	4.1	Inverter Drives 8400 motec	4.2	Cabinet	Inverter Drives SMV IP65	4.3	Servo Drives 9400 HighLine	4.4	Inverter Drives 8400 TopLine	4.5	Servo-Inverters i700	4.6	Inverter Drives 8400 HighLine	4.7	Inverter Drives 8400 StateLine	4.8	Inverter Drives SMV IP31	4.9	Inverter Drives 8400 BaseLine	4.10	Inverter Drives smd	4.11	4.1 4.2 4.3 4.4 4.5 4.6 4.7 4.8 4.9 4.10 4.11
Decentralised	Inverter Drives 8400 protec		4.1																							
	Inverter Drives 8400 motec	4.2																								
Cabinet	Inverter Drives SMV IP65	4.3																								
	Servo Drives 9400 HighLine	4.4																								
	Inverter Drives 8400 TopLine	4.5																								
	Servo-Inverters i700	4.6																								
	Inverter Drives 8400 HighLine	4.7																								
	Inverter Drives 8400 StateLine	4.8																								
	Inverter Drives SMV IP31	4.9																								
	Inverter Drives 8400 BaseLine	4.10																								
	Inverter Drives smd	4.11																								
	Motors	<table><tr><td rowspan="6">Servo motors</td><td>MCS synchronous servo motors</td><td>5.1</td></tr><tr><td>MDKS synchronous servo motors</td><td>5.2</td></tr><tr><td>SDSGS synchronous servo motors</td><td>5.3</td></tr><tr><td>MQA asynchronous servo motors</td><td>5.4</td></tr><tr><td>MCA asynchronous servo motors</td><td>5.5</td></tr><tr><td>SDSGA asynchronous servo motors</td><td>5.6</td></tr><tr><td rowspan="4">Three-phase AC motors</td><td>MF three-phase AC motors</td><td>5.7</td></tr><tr><td>MH three-phase AC motors</td><td>5.8</td></tr><tr><td>MD three-phase AC motors</td><td>5.9</td></tr><tr><td>Basic MD/MH three-phase AC motors</td><td>5.10</td></tr></table>	Servo motors	MCS synchronous servo motors	5.1	MDKS synchronous servo motors	5.2	SDSGS synchronous servo motors	5.3	MQA asynchronous servo motors	5.4	MCA asynchronous servo motors	5.5	SDSGA asynchronous servo motors	5.6	Three-phase AC motors	MF three-phase AC motors	5.7	MH three-phase AC motors	5.8	MD three-phase AC motors	5.9	Basic MD/MH three-phase AC motors	5.10	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 5.10	
Servo motors	MCS synchronous servo motors	5.1																								
	MDKS synchronous servo motors	5.2																								
	SDSGS synchronous servo motors	5.3																								
	MQA asynchronous servo motors	5.4																								
	MCA asynchronous servo motors	5.5																								
	SDSGA asynchronous servo motors	5.6																								
Three-phase AC motors	MF three-phase AC motors	5.7																								
	MH three-phase AC motors	5.8																								
	MD three-phase AC motors	5.9																								
	Basic MD/MH three-phase AC motors	5.10																								
Gearboxes	Planetary gearboxes Shaft-mounted helical gearboxes Helical-bevel gearboxes Helical gearboxes Bevel gearboxes Helical-worm gearboxes Worm gearboxes	6.1 6.2 6.3 6.4 6.5 6.6 6.7																								
Engineering tools	Navigator Drive Solution Designer Drive Solution Catalogue Engineer PLC Designer VisiWinNET® EASY Starter	7.1 7.2 7.3 7.4 7.5 7.6 7.7																								

 **Selected portfolio**

 **Additional portfolio**

Lenze makes many things easy for you.

With our motivated and committed approach, we work together with you to create the best possible solution and set your ideas in motion - whether you are looking to optimise an existing machine or develop a new one. We always strive to make things easy and seek perfection therein. This is anchored in our thinking, in our services and in every detail of our products. It's as easy as that!

1

Developing ideas

Are you looking to build the best machine possible and already have some initial ideas? Then get these down on paper together with us, starting with small innovative details and stretching all the way to completely new machines. Working together, we will develop an intelligent and sustainable concept that is perfectly aligned with your specific requirements.

2

Drafting concepts

We see welcome challenges in your machine tasks, supporting you with our comprehensive expertise and providing valuable impetus for your innovations. We take a holistic view of the individual motion and control functions here and draw up consistent, end-to-end drive and automation solutions for you - keeping everything as easy as possible and as extensive as necessary.

3

Implementing solutions

Our easy formula for satisfied customers is to establish an active partnership with fast decision making processes and an individually tailored offer. We have been using this easy principle to meet the ever more specialised customer requirements in the field of machine building for many years.

4

Manufacturing machines

Functional diversity in perfect harmony: as one of the few full-range providers in the market, we can provide you with precisely those products that you actually need for any machine task – no more and no less. Our L-force product portfolio, a consistent platform for implementing drive and automation tasks, is invaluable in this regard.

5

Ensuring productivity

Productivity, reliability and new performance peaks on a daily basis – these are our key success factors for your machine. After delivery, we offer you cleverly devised service concepts to ensure continued safe operation. The primary focus here is on technical support, based on the excellent application expertise of our highly-skilled and knowledgeable after-sales team.

A matter of principle: the right products for every application.


Lenze's extensive L-force product portfolio follows a very simple principle. The functions of our finely scaled products are assigned to the three lines Base-Line, State-Line or High-Line.

But what does this mean for you? It allows you to quickly recognise which products represent the best solution for your own specific requirements.

Powerful products with a major impact:


- Easy handling
- High quality and durability
- Reliable technologies in tune with the latest developments

Lenze products undergo the most stringent testing in our own laboratory. This allows us to ensure that you will receive consistently high quality and a long service life. In addition to this, five logistics centres ensure that the Lenze products you select are available for quick delivery anywhere across the globe. It's as easy as that!

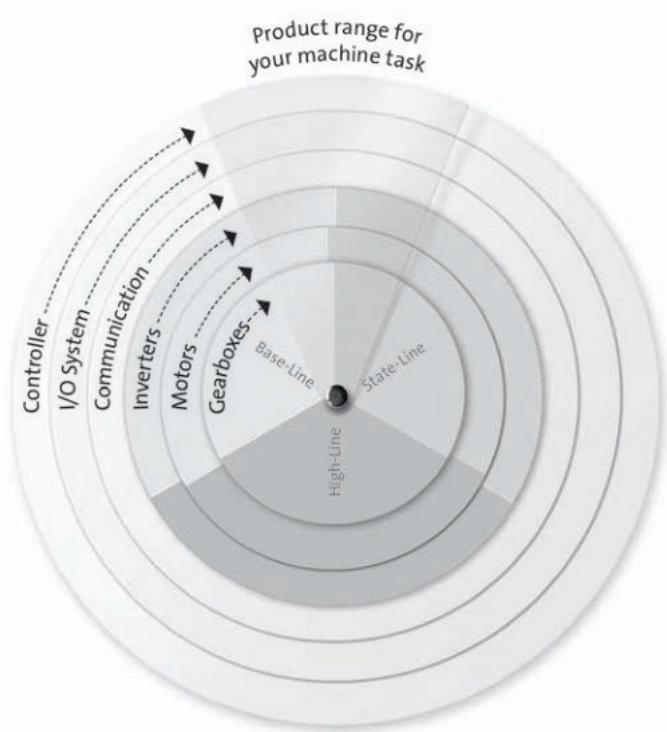


L-force product portfolio


Controls

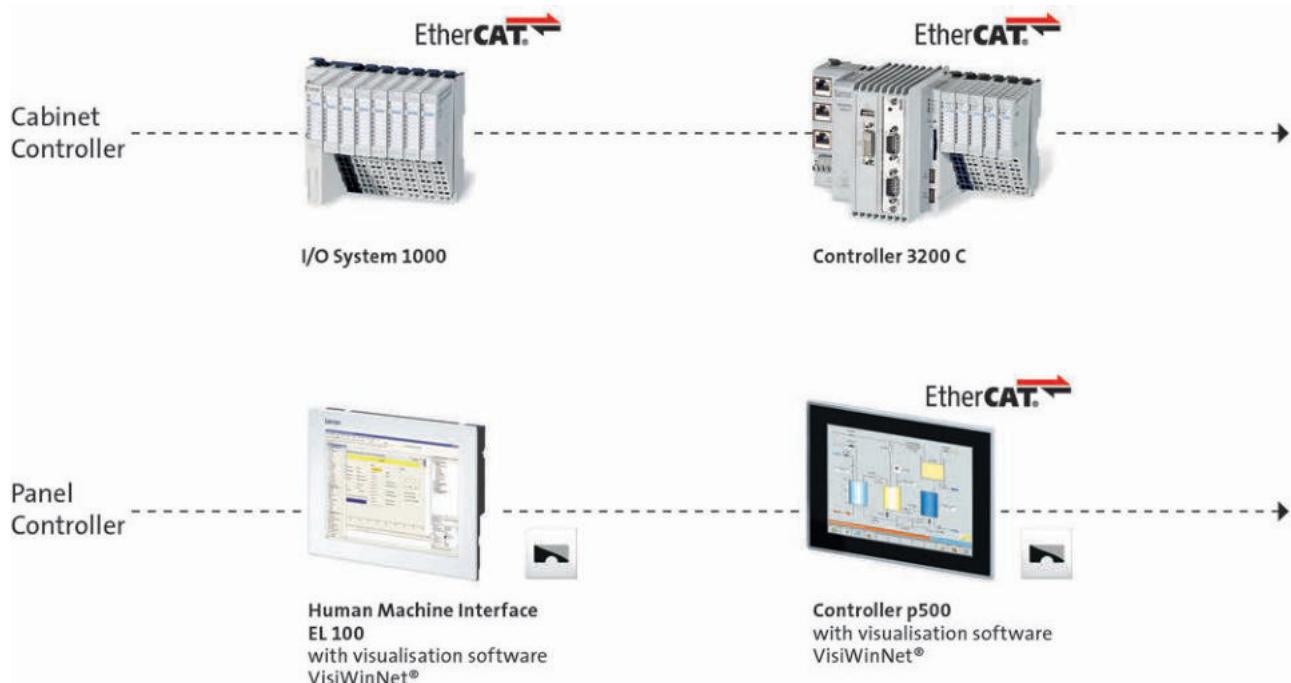

Engineering tools

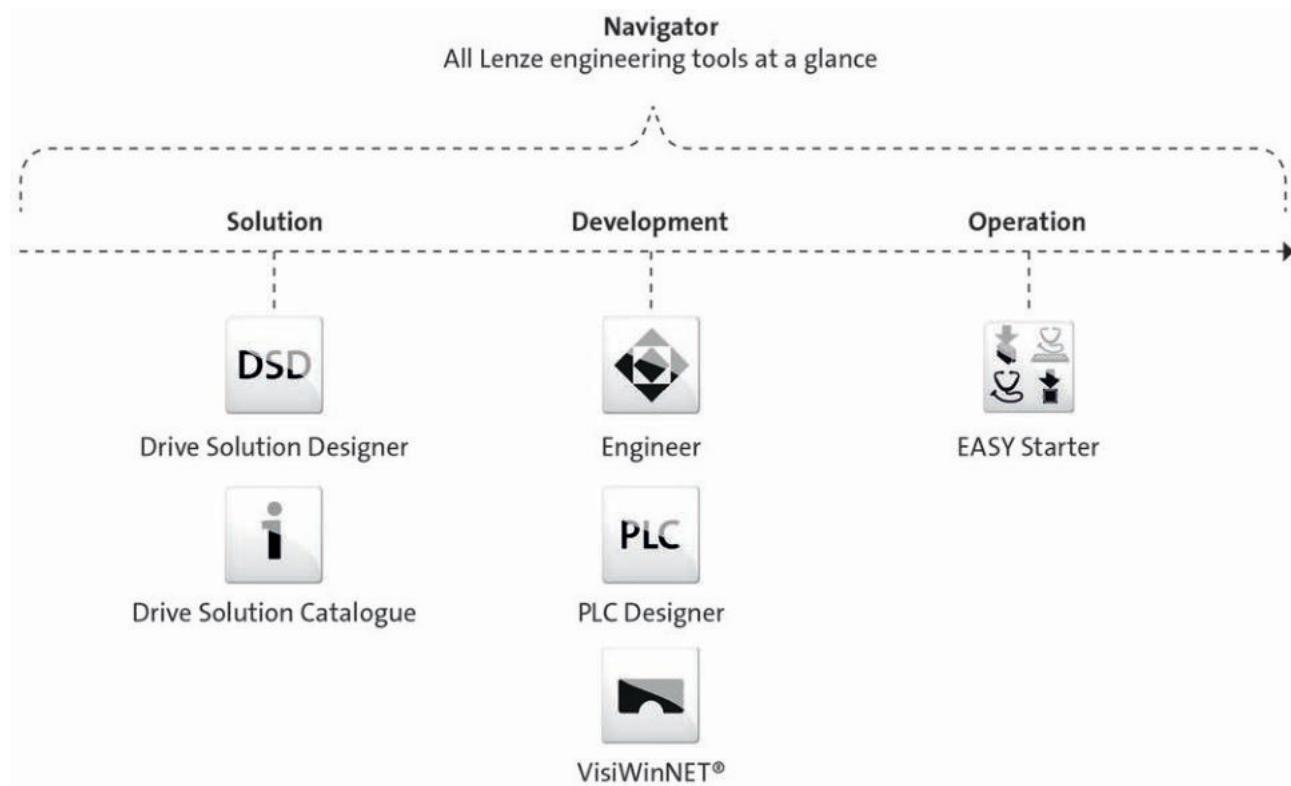

Inverters

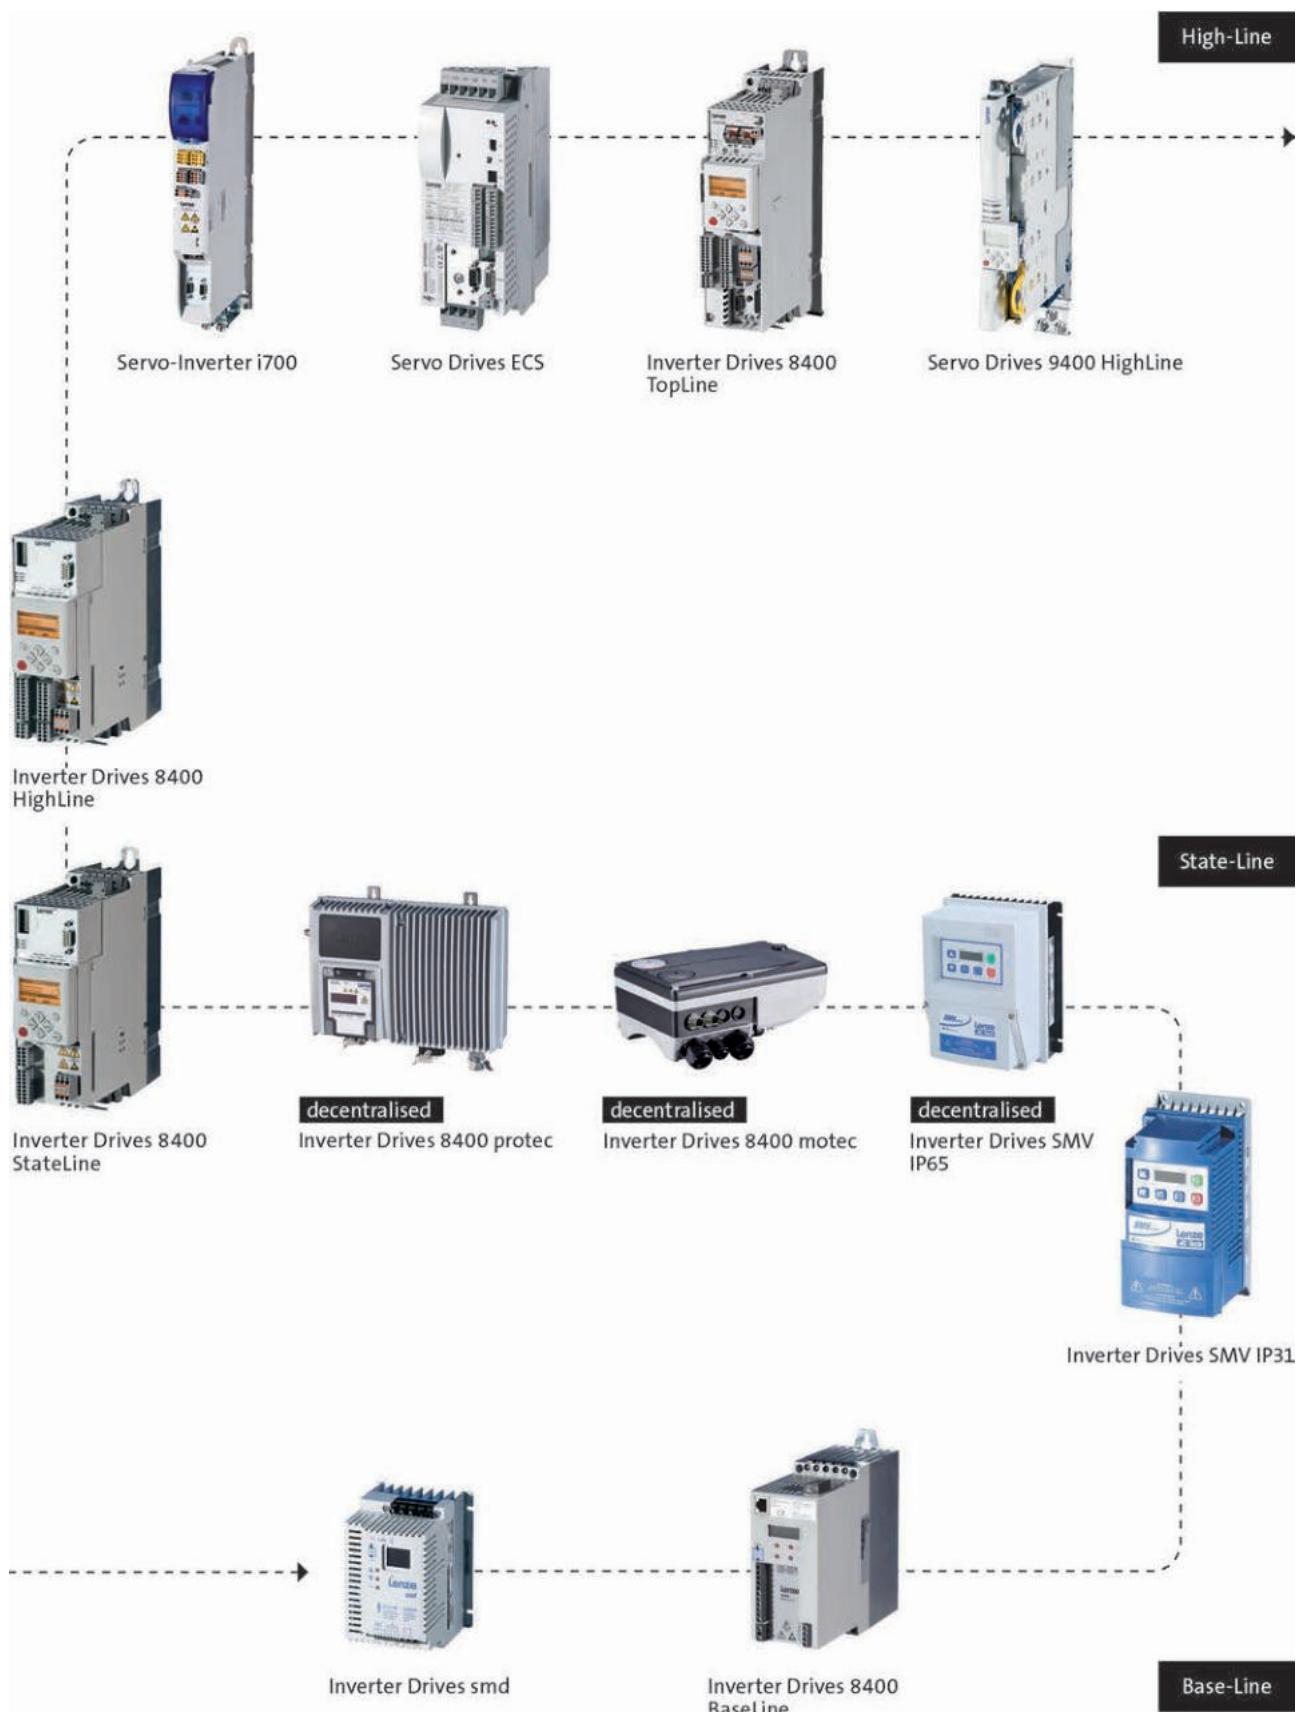

L-force product portfolio

Motors

High-Line



MQA asynchronous servo motors



SDSGS synchronous servo motors



MDXKS synchronous servo motors



Synchronous servo motors MCS



Asynchronous servo motors MCA



Asynchronous servo motors SDSGA

State-Line



MF three-phase AC motors



MH three-phase AC motors



MD three-phase AC motors



Basic MD/MH three-phase AC motors

Base-Line

Gearboxes

High-Line



Planetary gearboxes



Shaft-mounted helical
gearboxes

State-Line



Helical-bevel gearboxes



Helical gearboxes



Bevel gearboxes



Helical-worm gearboxes



Worm gearboxes

Base-Line

Inverter Drives 8400 BaseLine

0.25 ... 3.0 kW



Inverter Drives 8400 BaseLine



Contents


General information	Product key	4.10 - 4
	Equipment	4.10 - 5
	List of abbreviations	4.10 - 6
	Inverter Drives 8400	4.10 - 8
	Functions and features	4.10 - 9
Technical data	Standards and operating conditions	4.10 - 11
	Rated data 230 V	4.10 - 12
	Rated data 400 V	4.10 - 16
	Mains connection	4.10 - 20
	Connection plans	4.10 - 22
	Control connections	4.10 - 24
Modules	Memory module	4.10 - 26
Accessories	Brake resistors	4.10 - 27
	Mains chokes	4.10 - 28
	24 V power supply unit	4.10 - 29
	Brake switch	4.10 - 29
	USB diagnostic adapter	4.10 - 30
	PC system bus adapter	4.10 - 31
	Setpoint potentiometer	4.10 - 31

Inverter Drives 8400 BaseLine


General information



Product key

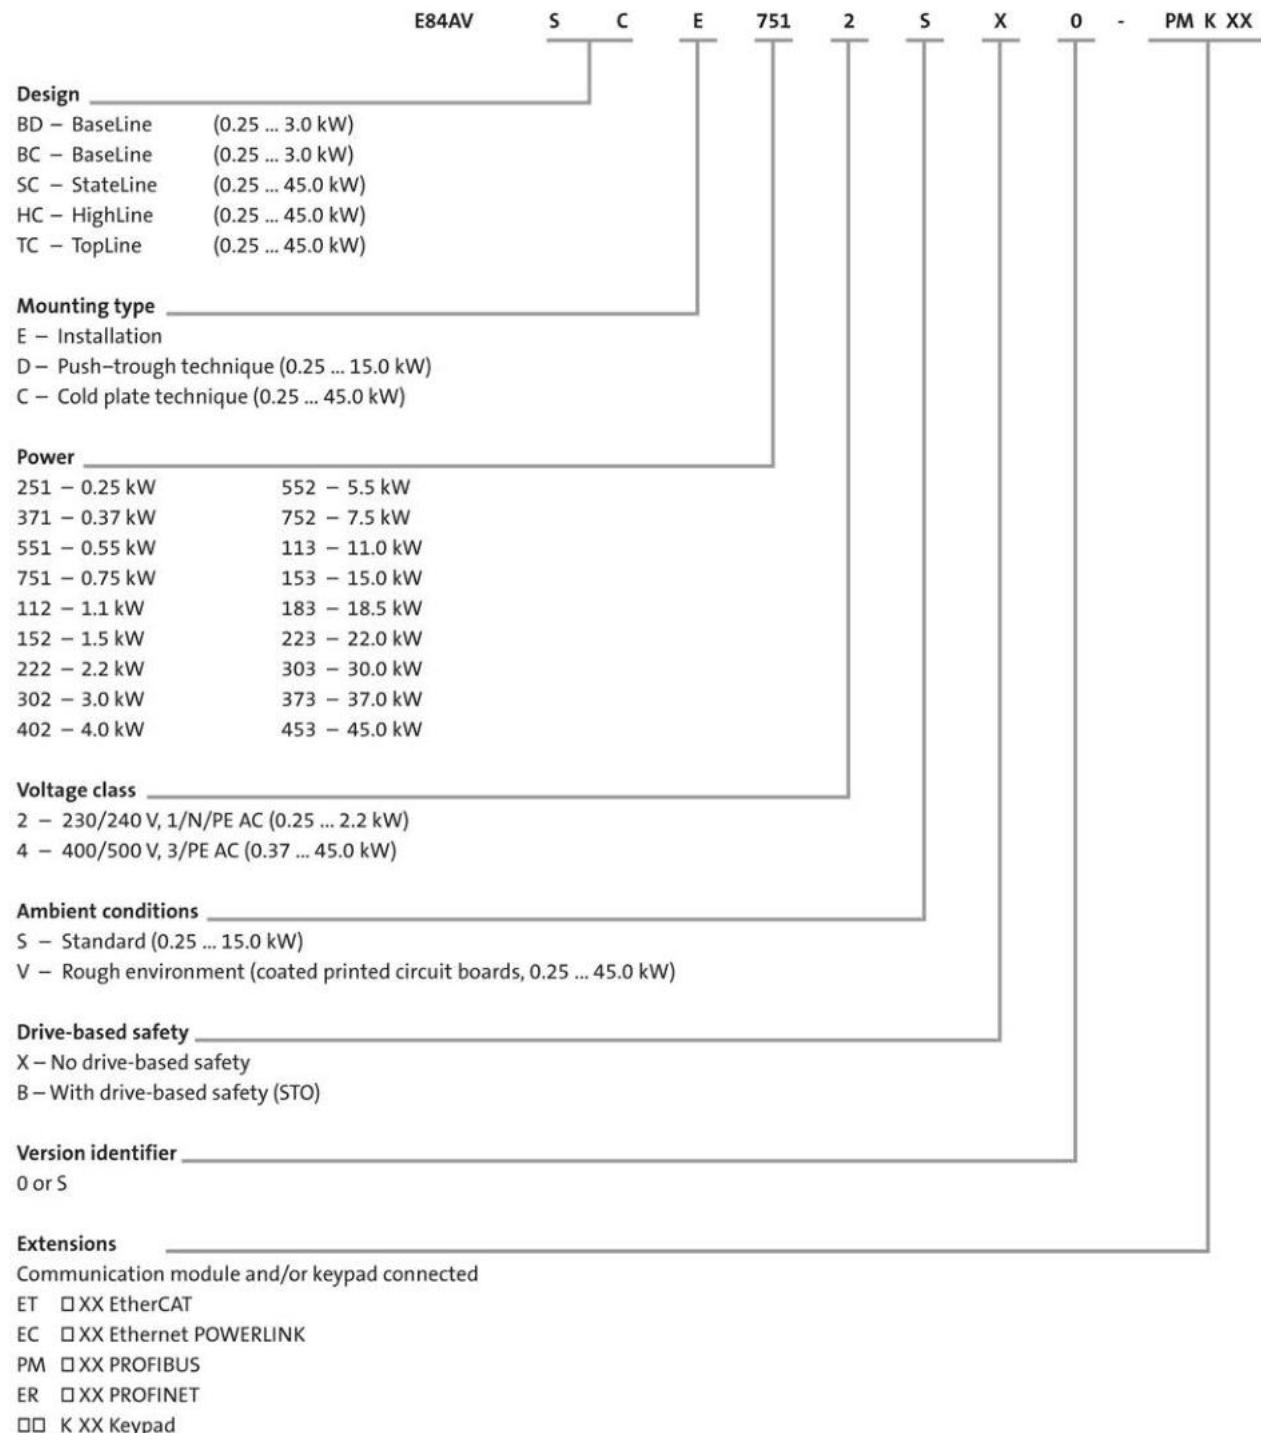

Equipment

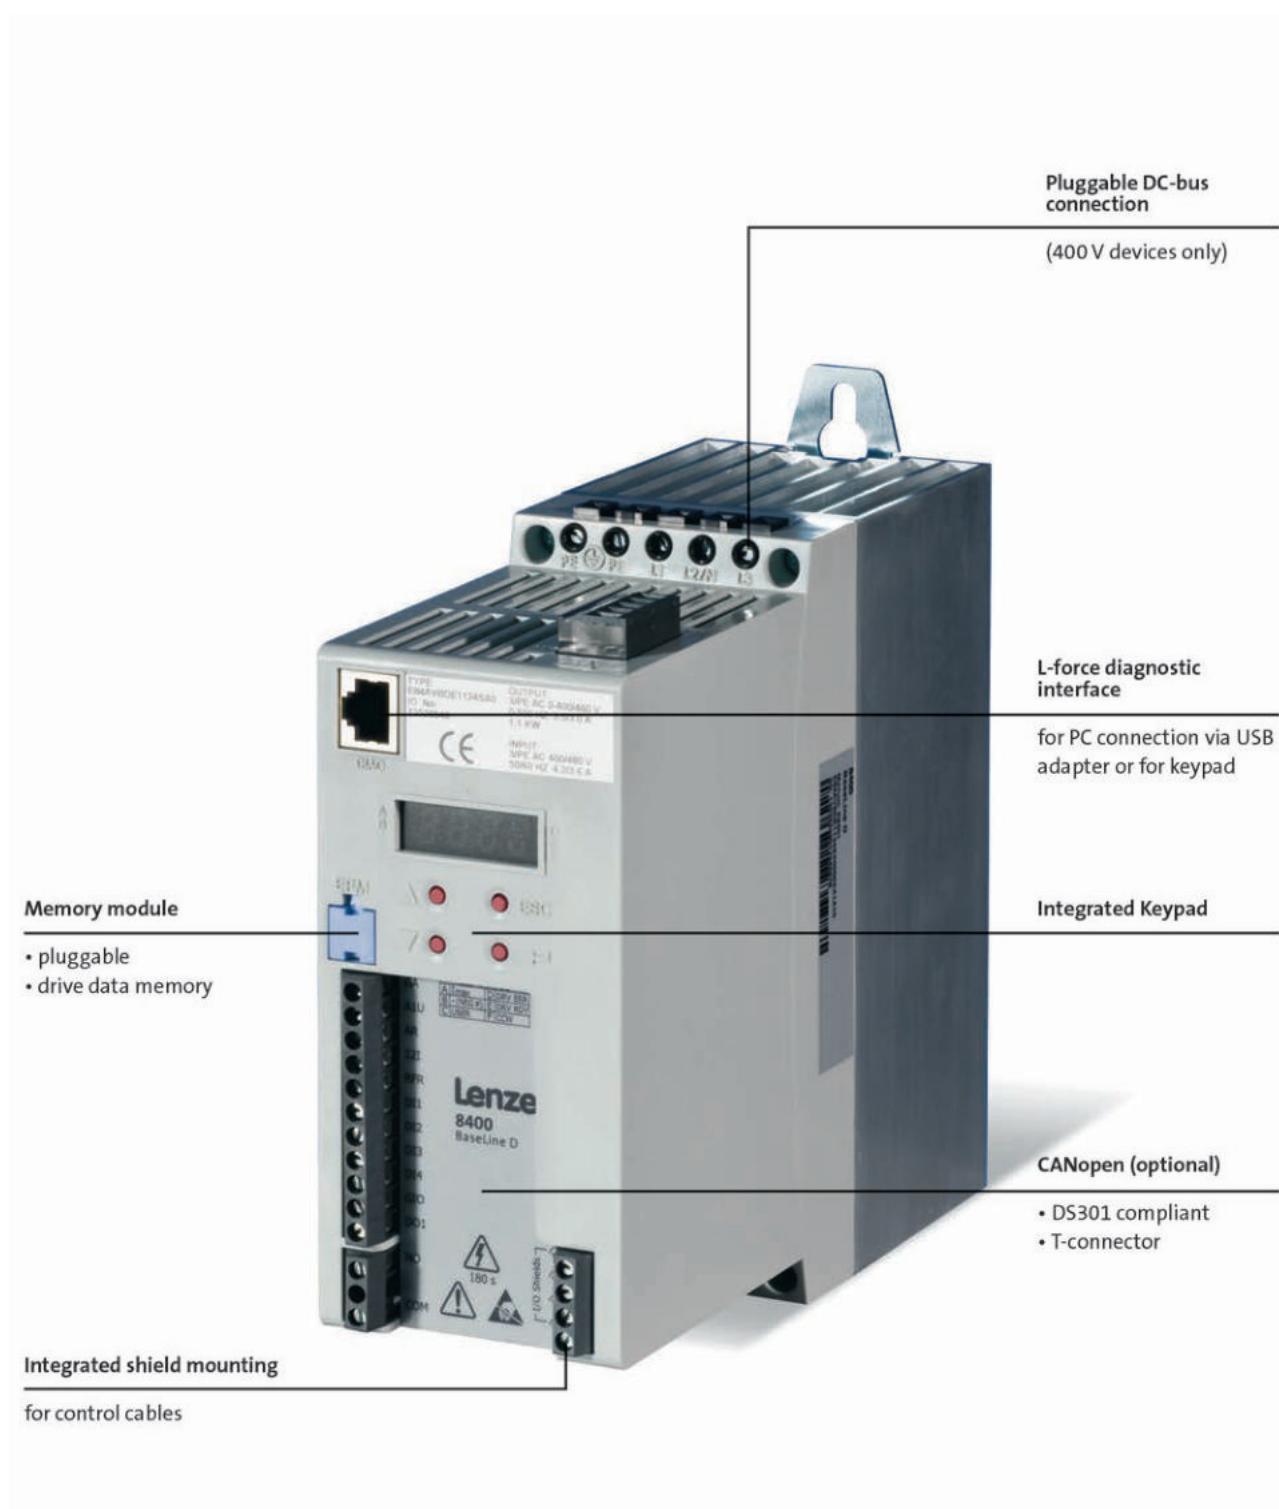

Inverter Drives 8400 BaseLine



General information

List of abbreviations

b	[mm]	Dimensions
C_{th}	[kWs]	Thermal capacity
f_{ch}	[kHz]	Rated switching frequency
h	[mm]	Dimensions
$I_{N,out}$	[A]	Rated output current
$I_{N,AC}$	[A]	Rated mains current
m	[kg]	Mass
n_{max}	[r/min]	Max. speed
P	[kW]	Typical motor power
P_V	[kW]	Power loss
P_N	[kW]	Rated power
R_N	[Ω]	Rated resistance
t	[mm]	Dimensions
U_{AC}	[V]	Mains voltage
U_{DC}	[V]	DC supply
$U_{N,AC}$	[V]	Rated voltage
U_{out}	[V]	Max. output voltage

ASM	Aynchronous motor
DIAG	Slot for diagnostic adapter
DIN	Deutsches Institut für Normung e.V.
EN	European standard
EN 60529	Degrees of protection provided by enclosures (IP code)
EN 60721-3	Classification of environmental conditions; Part 3: Classes of environmental parameters and their limit values
EN 61800-3	Electrical variable speed drives Part 3: EMC requirements including special test methods
IEC	International Electrotechnical Commission
IEC 61508	Functional safety of electrical/electronic/programmable electronic safety-related systems
IM	International Mounting Code
IP	International Protection Code
MCI	Slot for communication module (module communication interface)
NEMA	National Electrical Manufacturers Association
UL	Underwriters Laboratory Listed Product
UR	Underwriters Laboratory Recognized Product
VDE	Verband deutscher Elektrotechniker (Association of German Electrical Engineers)

Inverter Drives 8400 BaseLine

General information



AbN

automation

4.10

Inverter Drives 8400 BaseLine



General information

Inverter Drives 8400

Cost-efficiency, time savings and quality enhancement are the challenges of the future. Lenze is facing these challenges with its L-force product portfolio – the holistic solution portfolio with precisely matched interfaces and components. For faster configuration and commissioning, better performance and more flexibility in production.

As such, the four versions of Inverter Drives 8400 - BaseLine, StateLine, HighLine and TopLine - have been designed for consistent process optimisation – throughout your entire value-added chain. They reduce your costs, from component selection, through project planning, manufacturing and commissioning, all the way up to servicing. We call this "rightsizing".

Rightsized for versatile applications

Are you looking to control a three-phase AC motor or perform positioning with or without feedback? Then select exactly the inverter you need from the scaled solution space of the Inverter Drives 8400 with units in the power range from 0.25 kW to 45 kW. You are sure to find exactly what you are looking for here, as the modular 8400 range of inverters offers the right solution for a broad spectrum of applications.

While the BaseLine is excellent for basic applications, the TopLine offers servo qualities and thereby fulfils with the strict requirements in terms of dynamics and accuracy.

8400 BaseLine - for constant motion

The BaseLine version is the entry-level model in terms of functionality and drive behaviour. Featuring an integrated keypad and everything you would expect from a modern frequency inverter suitable for universal use, the 8400 BaseLine is the ideal solution for applications such as conveyor drives, pumps, fans or ventilators.

Two versions

Two versions of the 8400 BaseLine are available:

- BaseLine C with CANopen;
Product key: E84AVBCE□□□□SXO
- BaseLine D without communication;
Product key: E84AVBDE□□□□SXO

Functions and features

Mode	8400 BaseLine
Control types, motor control	V/f control without feedback (linear or square-law) Sensorless vector control (torque/speed)
Basic functions	Application-oriented commissioning Freely assignable user menu Data logger DC brake function Flying restart circuit S-shaped ramps for smooth acceleration Max. output frequency 300 Hz PID controller 3 fixed frequencies
Monitoring and protective measures	Short circuit Earth fault Overvoltage Motor stalling $I^2 \times t$ -Motor monitoring
Diagnostics	
Diagnostic interface	Integrated For USB diagnostic adapter in PC connection
Status display	4 LEDs
Braking operation	
Brake chopper	Integrated (400 V types)
Brake resistor	External (400 V types)

Inverter Drives 8400 BaseLine

Technical data



4.10

Standards and operating conditions

Mode			
Product			8400 BaseLine
Conformity			
CE			Low-Voltage Directive 2006/95/EG
Approval			
UL 508C			Power Conversion Equipment (File No. E170350)
CSA			
Certification			GOST-R
Degree of protection			
EN 60529 ²⁾			IP20
NEMA 250			Type 1
Climatic conditions			
Storage (EN 60721-3-1)			1K3 (temperature: -25 °C ... +60 °C)
Transport (EN 60721-3-2)			2K3 (temperature: -25 °C ... +70 °C)
Operation (EN 60721-3-3)			3K3 (temperature: -10°C ... +55°C)
Current derating at over 45°C			2.5% / K
Site altitude			
Amsl	H _{max}	[m]	4000
Current derating at over 1000 m		[%/1000 m]	5
Vibration resistance			
Transport (EN 60721-3-2)			2M2
Operation (EN 61800-5-1)			10 Hz ≤ f ≤ 57 Hz: ±0.075 mm amplitude, 57 Hz ≤ f ≤ 150 Hz: 1.0 g
Operation (Germanischer Lloyd)			5 Hz ≤ f ≤ 13.2 Hz: ± 1 mm amplitude 13.2 Hz ≤ f ≤ 100 Hz: 0.7 g

4.10

Mode		
Product		8400 BaseLine
Supply form		Systems with earthed star point (TN and TT systems)
Noise emission		Integrated RFI suppression: category C2 up to 25 m shielded motor cable ⁻¹⁾
EN 61800-3		
Insulation resistance		Overvoltage category III über 2000 m über NN Überspannungskategorie II
EN 61800-5-1		
Degree of pollution		
EN 61800-5-1		2
Protective insulation of control circuits		
EN 61800-5-1		Safe mains isolation: double/reinforced insulation

¹⁾  1 - Please also refer to the Motor connection section

²⁾ Mounted and ready-to-use

Inverter Drives 8400 BaseLine



Technical data

Rated data 230 V

► Unless otherwise specified, the data refers to the default setting.

Data / Device

Operation with rated data: rated output current $I_{N,out}$ at mains voltage 230 V, switching frequency 8 kHz variable and max. ambient temperature 45 °C (default setting).

Output currents I_{out} apply to:

Ambient temperature 45 °C operating with constant switching frequency 2 kHz or 4 kHz.

Ambient temperature 40 °C operating with constant switching frequency 8 kHz or 16 kHz.

4.10							
	Typical motor power						
	4-pole asynchronous motor	P	[kW]	0.25	0.37	0.55	
	Product key						
	Inverter			E84AV□□□2512□□0	E84AV□□□3712□□0	E84AV□□□5512□□0	
	Mains voltage range			1/N/PE AC 180 V-0 % ... 264 V+0 %, 45 Hz-0 % ... 65 Hz+0 %			
		U_{AC}	[V]				
	Rated mains current						
	With mains choke	$I_{N, AC}$	[A]	3.0	4.2	5.4	7.0
	Without mains choke	$I_{N, AC}$	[A]	3.4	5.1	6.7	8.8
	Rated output current						
		$I_{N, out}$	[A]	1.7	2.4	3.0	4.0
	Output current						
	2 kHz	I_{out}	[A]	1.7	2.4	3.0	4.0
	4 kHz	I_{out}	[A]	1.7	2.4	3.0	4.0
	8 kHz	I_{out}	[A]	1.7	2.4	3.0	4.0
	16 kHz	I_{out}	[A]	1.1	1.6	2.0	2.7

Data for 60 s overload

Max. output current						
	$I_{max, out}$	[A]	2.6	3.6	4.5	6.0
Overload time						
	t_{ol}	[s]		60.0		
Recovery time						
	t_{re}	[s]		120.0		

Data for 3 s overload

Max. short-time output current						
	$I_{max, out}$	[A]	3.4	4.8	6.0	8.0
Overload time						
	t_{ol}	[s]		3.0		
Recovery time						
	t_{re}	[s]		12.0		

Rated data 230 V

► Unless otherwise specified, the data refers to the default setting.

						
Typical motor power						
4-pole asynchronous motor	P	[kW]	0.25	0.37		
Product key						
Inverter			E84AV□□□2512□□0	E84AV□□□3712□□0	E84AV□□□5512□□0	E84AV□□□7512□□0
Power loss						
	P _V	[kW]	15.0	17.0	23.0	30.0
Max. cable length¹⁾						
Shielded motor cable	l _{max}	[m]		50		

Dimensions and weights

Dimensions						
Height	h	[mm]	165	165	165	165
Width	b	[mm]	70	70	70	70
Depth	t	[mm]	144	144	162	162
Mass						
	m	[kg]	1.2	1.2	1.2	1.2

¹⁾ Technically possible cable lengths, irrespective of EMC requirements

Inverter Drives 8400 BaseLine



Technical data

Rated data 230 V

► Unless otherwise specified, the data refers to the default setting.

Data / Device

Operation with rated data: rated output current $I_{N,out}$ at mains voltage 230 V, switching frequency 8 kHz variable and max. ambient temperature 45 °C (default setting).

Output currents I_{out} apply to:

Ambient temperature 45 °C operating with constant switching frequency 2 kHz or 4 kHz.

Ambient temperature 40 °C operating with constant switching frequency 8 kHz or 16 kHz.

4.10						
	Typical motor power					
	4-pole asynchronous motor	P	[kW]	1.10	1.50	2.20
	Product key					
	Inverter			E84AV□□□1122□□0	E84AV□□□1522□□0	E84AV□□□2222□□0
	Mains voltage range			1/N/PE AC 180 V-0 % ... 264 V+0 %, 45 Hz-0 % ... 65 Hz+0 %		
		U_{AC}	[V]			
	Rated mains current					
	With mains choke	$I_{N, AC}$	[A]	9.9	11.8	15.7
	Without mains choke	$I_{N, AC}$	[A]	12.0	13.7	22.0
	Rated output current					
		$I_{N, out}$	[A]	5.5	7.0	9.5
	Output current					
	2 kHz	I_{out}	[A]	5.5	7.0	9.5
	4 kHz	I_{out}	[A]	5.5	7.0	9.5
	8 kHz	I_{out}	[A]	5.5	7.0	9.5
	16 kHz	I_{out}	[A]	3.7	4.7	6.3

Data for 60 s overload

Max. output current						
	$I_{max, out}$	[A]	8.3	10.5	14.3	
Overload time						
	t_{ol}	[s]		60.0		
Recovery time						
	t_{re}	[s]		120.0		

Data for 3 s overload

Max. short-time output current						
	$I_{max, out}$	[A]	11.0	14.0	19.0	
Overload time						
	t_{ol}	[s]		3.0		
Recovery time						
	t_{re}	[s]		12.0		

Rated data 230 V

► Unless otherwise specified, the data refers to the default setting.

					
Typical motor power					
4-pole asynchronous motor	P	[kW]	1.10	1.50	2.20
Product key					
Inverter			E84AV□□□1122□□0	E84AV□□□1522□□0	E84AV□□□2222□□0
Power loss					
	P _V	[kW]	43.0	54.0	76.0
Max. cable length¹⁾					
Shielded motor cable	l _{max}	[m]		50	

Dimensions and weights

Dimensions					
Height	h	[mm]	165	215	215
Width	b	[mm]	70	70	70
Depth	t	[mm]	162	162	162
Mass					
	m	[kg]	1.4	1.9	1.9

¹⁾ Technically possible cable lengths, irrespective of EMC requirements

Inverter Drives 8400 BaseLine



Technical data

Rated data 400 V

► Unless otherwise specified, the data refers to the default setting.

Data / Device

Operation with rated data: rated output current $I_{N,out}$ at mains voltage 400 V, switching frequency 8 kHz variable and max. ambient temperature 45 °C (default setting).

Output currents I_{out} apply to:

Ambient temperature 45 °C operating with constant switching frequency 2 kHz or 4 kHz.

Ambient temperature 40 °C operating with constant switching frequency 8 kHz or 16 kHz.

4.10						
	Typical motor power					
	4-pole asynchronous motor	P	[kW]	0.37	0.55	0.75
	Product key					
	Inverter			E84AV□□□3714□□0	E84AV□□□5514□□0	E84AV□□□7514□□0
	Mains voltage range			3/PE AC 180 V-0 % ... 550 V+0 %, 45 Hz-0 % ... 65 Hz+0 %		
		U_{AC}	[V]			
	Rated mains current					
	With mains choke	$I_{N, AC}$	[A]	1.4	1.8	2.2
	Without mains choke	$I_{N, AC}$	[A]	1.8	2.3	3.2
	Rated output current					
		$I_{N, out}$	[A]	1.3	1.8	2.4
	Output current					
	2 kHz	I_{out}	[A]	1.3	1.8	2.4
	4 kHz	I_{out}	[A]	1.3	1.8	2.4
	8 kHz	I_{out}	[A]	1.3	1.8	2.4
	16 kHz	I_{out}	[A]	0.9	1.2	1.6

Data for 60 s overload

Max. output current						
	$I_{max, out}$	[A]	2.0	2.7	3.6	
Overload time						
	t_{ol}	[s]		60.0		
Recovery time						
	t_{re}	[s]		120.0		

Data for 3 s overload

Max. short-time output current						
	$I_{max, out}$	[A]	2.3	3.2	4.2	
Overload time						
	t_{ol}	[s]		3.0		
Recovery time						
	t_{re}	[s]		12.0		

Rated data 400 V

► Unless otherwise specified, the data refers to the default setting.

				
Typical motor power				
4-pole asynchronous motor	P	[kW]	0.37	0.55
Product key				
Inverter			E84AV□□□3714□□0	E84AV□□□5514□□0
DC supply			DC 455 V -0 % ... 775 V +0 %	
	U _{DC}	[V]		
Rated DC-bus current				
	I _{N, DC}	[A]	2.2	2.8
Power loss				
	P _V	[kW]	15.0	22.0
Max. cable length¹⁾				
Shielded motor cable	I _{max}	[m]	50	

Brake chopper rated data

4.10

Rated power, Brake chopper					
	P _N	[kW]	1.3	1.3	1.3
Max. output power, Brake chopper					
	P _{max, 1}	[kW]	1.3	1.3	1.3
Min. brake resistance					
	R _{min}	[Ω]	390.0	390.0	390.0

Dimensions and weights

Dimensions					
Height	h	[mm]	165	165	165
Width	b	[mm]	70	70	70
Depth	t	[mm]	162	162	162
Mass					
	m	[kg]	1.2	1.2	1.2

¹⁾ Technically possible cable lengths, irrespective of EMC requirements

Inverter Drives 8400 BaseLine



Technical data

Rated data 400 V

► Unless otherwise specified, the data refers to the default setting.

Data / Device

Operation with rated data: rated output current $I_{N,out}$ at mains voltage 400 V, switching frequency 8 kHz variable and max. ambient temperature 45 °C (default setting).

Output currents I_{out} apply to:

Ambient temperature 45 °C operating with constant switching frequency 2 kHz or 4 kHz.

Ambient temperature 40 °C operating with constant switching frequency 8 kHz or 16 kHz.

4.10							
	Typical motor power						
	4-pole asynchronous motor	P	[kW]	1.10	1.50	2.20	3.00
	Product key						
	Inverter			E84AV□□□1124□□0	E84AV□□□1524□□0	E84AV□□□2224□□0	E84AVB□□3024□□0
	Mains voltage range			3/PE AC 180 V-0 % ... 550 V+0 %, 45 Hz-0 % ... 65 Hz+0 %			
		U_{AC}	[V]				
	Rated mains current						
	With mains choke	$I_{N, AC}$	[A]	3.2	3.6	5.0	7.1
	Without mains choke	$I_{N, AC}$	[A]	4.2	4.7	6.2	10.2
	Rated output current						
		$I_{N, out}$	[A]	3.2	3.9	5.6	7.3
	Output current						
	2 kHz	I_{out}	[A]	3.2	3.9	5.6	7.3
	4 kHz	I_{out}	[A]	3.2	3.9	5.6	7.3
	8 kHz	I_{out}	[A]	3.2	3.9	5.6	7.3
	16 kHz	I_{out}	[A]	2.1	2.6	3.7	4.9

Data for 60 s overload

Max. output current						
	$I_{max, out}$	[A]	4.8	5.9	8.4	11.0
Overload time						
	t_{ol}	[s]		60.0		
Recovery time						
	t_{re}	[s]		120.0		

Data for 3 s overload

Max. short-time output current						
	$I_{max, out}$	[A]	5.6	6.8	9.8	12.4
Overload time						
	t_{ol}	[s]		3.0		
Recovery time						
	t_{re}	[s]		12.0		

Rated data 400 V

► Unless otherwise specified, the data refers to the default setting.

					
Typical motor power					
4-pole asynchronous motor	P	[kW]	1.10	1.50	
			2.20	3.00	
Product key					
Inverter			E84AV□□□1124□□0	E84AV□□□1524□□0	
			E84AV□□□2224□□0	E84AVB□□3024□□0	
DC supply					
	U _{DC}	[V]	DC 455 V -0 % ... 775 V +0 %		
Rated DC-bus current					
	I _{N, DC}	[A]	5.1	5.8	
			7.6	10.0	
Power loss					
	P _V	[kW]	42.0	48.0	
			66.0	91.0	
Max. cable length¹⁾					
Shielded motor cable	I _{max}	[m]	50		

Brake chopper rated data

4.10

Rated power, Brake chopper						
	P _N	[kW]	2.9	2.9	3.5	7.3
Max. output power, Brake chopper						
	P _{max, 1}	[kW]	2.9	2.9	3.5	7.3
Min. brake resistance						
	R _{min}	[Ω]	180.0	180.0	150.0	82.0

Dimensions and weights

Dimensions						
Height	h	[mm]	165	165	215	
Width	b	[mm]	70	70	70	
Depth	t	[mm]	162	162	162	
Mass						
	m	[kg]	1.4	1.4	1.4	1.9

¹⁾ Technically possible cable lengths, irrespective of EMC requirements

Inverter Drives 8400 BaseLine



Technical data

Mains connection

- The mains fuse and cable cross-section specifications are for a mains connection of 1 x 230V or 3 x 400V.
- Class gG/gI fuses or class gRL semiconductor fuses.
- The cable cross-sections apply to PVC-insulated copper cables.
- Use for installation with UL-approved cables, fuses and brackets.

Operation with mains choke

Typical motor power	Mains voltage	Product key	Circuit breaker	Fuse		Mains connection
P [kW]	U _{AC} [V]	Inverter		EN 60204-1	UL	Cross-section (with mains choke)
0.25	1 AC 180 ... 264	E84AV□□□2512□□0	C6	6	6	1.0
0.37		E84AV□□□3712□□0			10	
0.55		E84AV□□□5512□□0			15	
0.75		E84AV□□□7512□□0	C10	10	20	1.5
1.10		E84AV□□□1122□□0			25	
1.50		E84AV□□□1522□□0			30	
2.20		E84AV□□□2222□□0	C16	16	4.0	2.5
0.37		E84AV□□□3714□□0			6	
0.55		E84AV□□□5514□□0	C6	6	10	1.0
0.75		E84AV□□□7514□□0			15	
1.10		E84AV□□□1124□□0			20	
1.50		E84AV□□□1524□□0	C10	10	25	1.5
2.20		E84AV□□□2224□□0			30	
3.00		E84AV□□□3024□□0			15	

Operation without mains choke

Typical motor power	Mains voltage	Product key	Circuit breaker	Fuse		Mains connection
P [kW]	U _{AC} [V]	Inverter		EN 60204-1	UL	Cross-section (without mains choke)
0.25	1 AC 180 ... 264	E84AV□□□2512□□0	C6	6	6	1.0
0.37		E84AV□□□3712□□0			10	
0.55		E84AV□□□5512□□0			15	
0.75		E84AV□□□7512□□0	C10	10	20	1.5
1.10		E84AV□□□1122□□0			25	
1.50		E84AV□□□1522□□0			30	
2.20		E84AV□□□2222□□0	C25	25	4.0	2.5
0.37		E84AV□□□3714□□0			6	
0.55		E84AV□□□5514□□0	C6	6	10	1.0
0.75		E84AV□□□7514□□0			15	
1.10		E84AV□□□1124□□0			20	
1.50		E84AV□□□1524□□0	C10	10	25	1.5
2.20		E84AV□□□2224□□0			30	
3.00		E84AV□□□3024□□0	C16	16	15	2.5

Inverter Drives 8400 BaseLine

Technical data




Inverter Drives 8400 BaseLine




Technical data

Connection plans

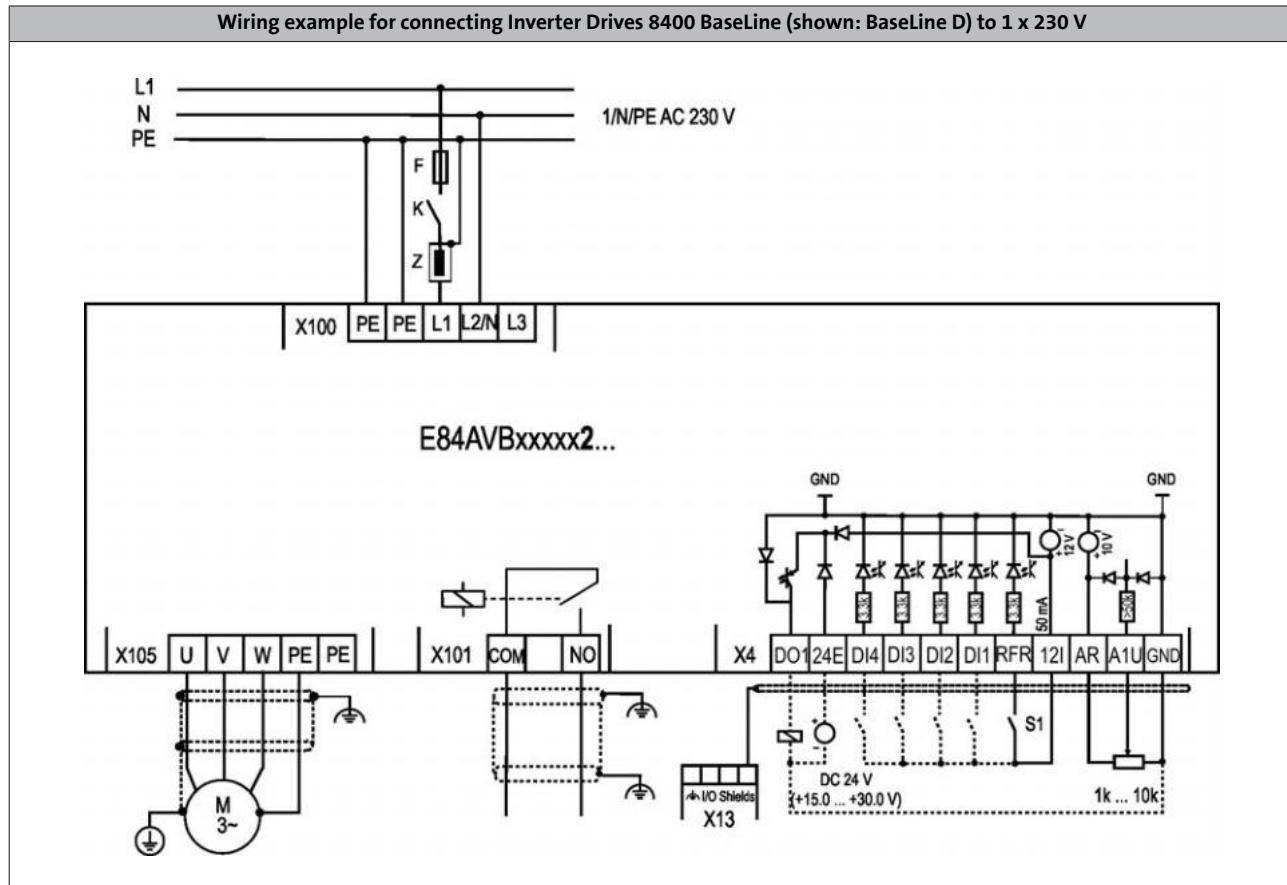

Connection plans

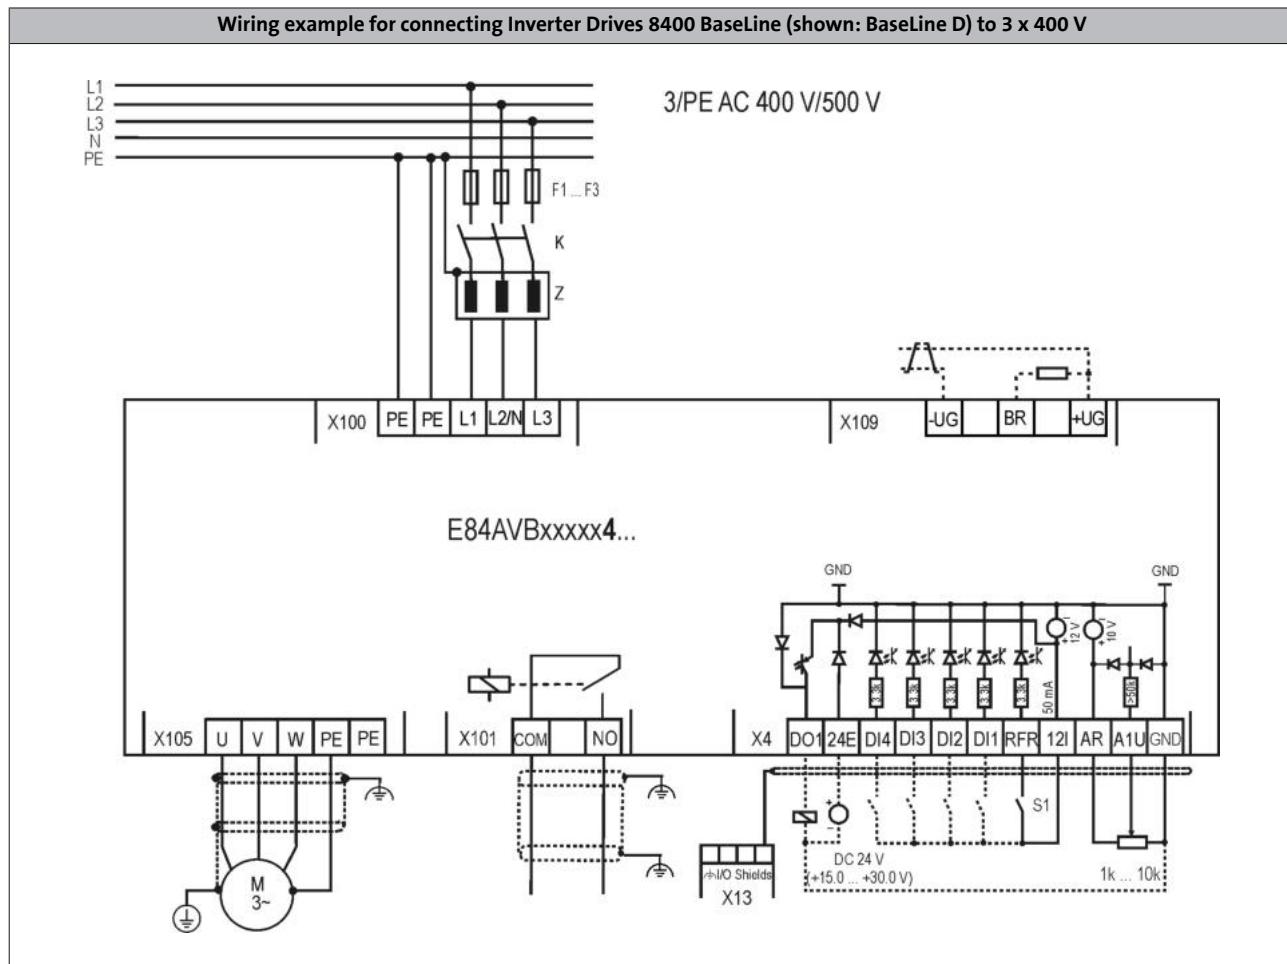

Inverter Drives 8400 BaseLine






Technical data

Control connections

Mode	8400 BaseLine
Analog inputs	
Number	1 Switchable: voltage or current input
Resolution	10 bits
Value range	0 ... 10V, 0/4 ... 20mA
Digital inputs	
Number	5
Switching level	PLC (IEC 61131-2)
Max. input current	11mA
Digital outputs	
Number	1
Switching level	PLC (IEC 61131-2)
Max. output current	50mA
Relay	
Number	1
Contact	NO contact
AC connection	250V, 3A
DC connection	24V, 2A ... 240V, 0.16A
Interfaces	
CANopen	functional insulated Max. baud rate 1000 kbps Integriert (BaseLine C)

Control connections

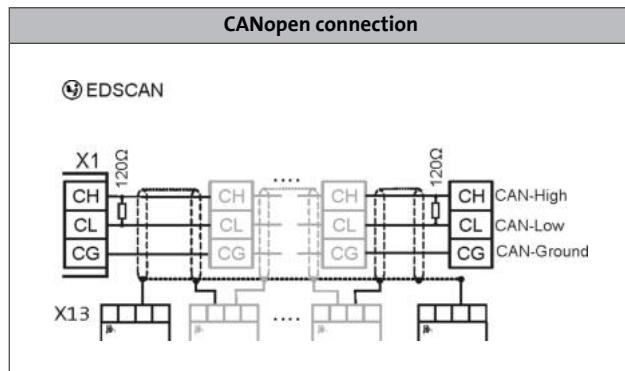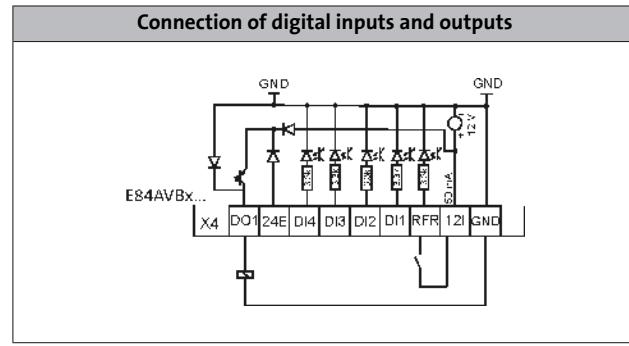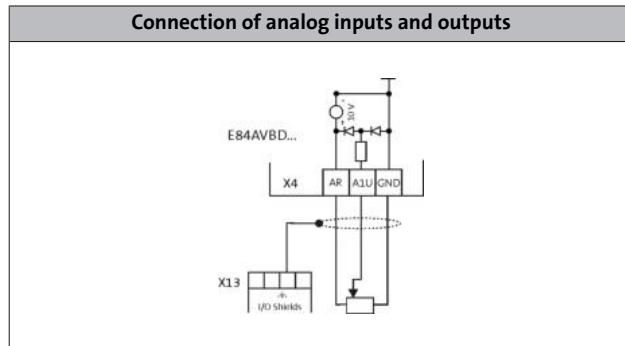

Inverter Drives 8400 BaseLine



Modules

Memory module

All drive settings for the 8400 are stored on the memory module, which is a pluggable memory chip. The memory module ensures that drives can be replaced quickly and without errors being made.

Mode	Features	Product key
Memory module	<ul style="list-style-type: none">• For 8400 BaseLine, 8400 motec• Packaging unit: 12 items	E84AYM20S/M

- Each inverter is equipped with a memory module in the factory

Brake resistors

An external brake resistor is required to brake high moments of inertia or in the event of prolonged operation in generator mode; this resistor converts braking energy into heat.

The brake resistors recommended in the table below have been dimensioned for approx. 1.5 times the regenerative power, with a cycle time of 15/135 s (brake/rest ratio). These brake resistors generally meet the usual requirements of standard applications.



The brake resistors are fitted with a thermostat (potential-free NC contact).

ERBM... (IP50) brake resistor

Typical motor power	Mains voltage	Product key		Rated resistance	Rated power	Thermal capacity	Dimensions	Mass
4-pole asynchronous motor		Inverter	Brake resistor					
P	U _{AC}			R _N	P _N	C _{th}	h x b x t	m
[kW]	[V]			[Ω]	[kW]	[kWs]	[mm]	[kg]
0.37	3 AC 320 ... 550	E84AV□□□3714□□0	ERBM390R100W	390.0	100.0	15	235 x 20.6 x 40	0.4
0.55		E84AV□□□5514□□0						
0.75		E84AV□□□7514□□0						
1.10		E84AV□□□1124□□0	ERBP180R200W	180.0	200.0	30	240 x 41 x 122	1.0
1.50		E84AV□□□1524□□0						
2.20		E84AV□□□2224□□0	ERBP180R300W	180.0	300.0	45	320 x 41 x 122	1.4
3.00		E84AV□□□3024□□0						

4.10

- Brake resistor connection requires a connector (product key: EWS0074/M).

► Data sheet on ERBM brake resistors

[DS_ZB_ERBM_0001](#)

Available for download at www.lenze.de/dsc

► Data sheet on ERBP brake resistors

[DS_ZB_ERBP_0001](#)

Available for download at lenze.de/dsc

► Data sheet on ERBP brake resistors

[DS_ZB_ERBP_0001](#)

Available for download at lenze.de/dsc

► Data sheet on ERBS brake resistors

[DS_ZB_ERBS_0001](#)

Available for download at www.lenze.com/dsc

Inverter Drives 8400 BaseLine



Accessories

Mains chokes

A mains choke is an inductive resistor which is connected in the mains cable of the inverter. The use of a mains choke provides the following advantages:

- **Fewer effects on the mains:**
The wave form of the mains current is a close approximation to a sine wave.
- **Reduction in the effective mains current:**
Reduction of mains, cable and fuse loads

Mains chokes can be used without restrictions in conjunction with RFI filters and/or sinusoidal filters.



Please note:

: The use of a mains choke slightly reduces the mains voltage at the input of the inverter - the typical voltage drop across the mains choke at the rated values is around 5%.

Mains choke

Typical motor power	Mains voltage	Product key		Rated current	Dimensions	Mass		
4-pole asynchronous motor		Inverter	Mains choke					
P	U _{AC}			I _N	h x b x t	m		
[kW]	[V]			[A]	[mm]	[kg]		
0.25	1 AC 180 ... 264	E84AV□□□2512□□0	ELN1-0900H005	5.00	75 x 66 x 82	1.1		
0.37		E84AV□□□3712□□0						
0.55		E84AV□□□5512□□0	ELN1-0500H009	9.00				
0.75		E84AV□□□7512□□0						
1.10		E84AV□□□1122□□0	ELN1-0250H018	18.0	96 x 96 x 90	2.1		
1.50		E84AV□□□1522□□0						
2.20		E84AV□□□2222□□0						
0.37	3 AC 320 ... 550	E84AV□□□3714□□0	ELN3-1500H003-001	2.50	105 x 129 x 61	1.2		
0.55		E84AV□□□5514□□0						
0.75		E84AV□□□7514□□0						
1.10		E84AV□□□1124□□0	ELN3-0680H006-001	6.10	122 x 148 x 61	2.0		
1.50		E84AV□□□1524□□0						
2.20		E84AV□□□2224□□0						
3.00		E84AV□□□3024□□0	ELN3-0500H007-001	7.00	122 x 148 x 63	2.6		

24 V power supply unit

External power supply units are available for supplying the control electronics of the 8400 StateLine, HighLine or TopLine. With an external supply, the inverters can be parameterised and diagnosed while the mains input is deenergised.



24 V power supply unit

Rated data

Product key			EZV1200-000	EZV2400-000	EZV4800-000	EZV1200-001	EZV2400-001	EZV4800-001
Rated voltage								
AC	$U_{N, AC}$	[V]		230			400	
Rated mains current								
	$I_{N, AC}$	[A]	0.8	1.2	2.3	0.3	0.6	1.0
Output voltage								
	U_{out}	[V]			DC 22.5 ... 28.5			
Rated current								
	I_N	[A]	5.00	10.0	20.0	5.00	10.0	20.0
Dimensions								
Height	h	[mm]			130			
Width	b	[mm]	55	85	157	73	85	160
Depth	t	[mm]			125			
Mass								
	m	[kg]	0.8	1.2	2.5	1.0	1.1	1.9

4.10

Brake switch

The brake switch consists of a rectifier and an electronic circuit breaker for the switching of an electromechanical brake switch. The brake switch is mounted on the control cabinet plate by means of two screws. Control is performed using a digital output on the inverter.



Brake switch

Mode	Features	Product key
Half-wave rectification	<ul style="list-style-type: none"> • Input voltage: AC 320 ... 550 V • Output voltage: DC 180 V (at AC 400 V), DC 225 V (at AC 500 V) • Max. brake current: DC 0.61 A • Enclosure: IP00 	E82ZWBRE
Bridge rectification	<ul style="list-style-type: none"> • Input voltage: AC 180 ... 317 V • Output voltage: DC 205 V (at AC 230 V) • Max. brake current: DC 0.54 A • Enclosure: IP00 	E82ZWBRB

 Data sheet on E82ZWBRE brake switch
DS_Brake_8400_0001
Available for download at www.lenze.de/dsc

 Data sheet on E82ZWBRB brake switch
DS_Brake_8400_0002
Available for download at www.lenze.de/dsc

Inverter Drives 8400 BaseLine

Accessories



USB diagnostic adapter

The operation, parameter setting and diagnostics of the Inverter Drives 8400 and the Servo Drives 9400 via the L-force diagnostics is made with the keypad X400 or a PC. The connection of a PC can be made via a USB interface and the USB diagnostic adapter.

For connecting the USB diagnostic adapter with the L-force diagnostics interface (DIAG) at the inverter, three different connecting cables are separately available in the lengths 2.5 m, 5 m and 10 m. The connection can be established during operation. The engineering tools EASY Starter or Engineer can be used to carry out the operation, parameter setting or diagnostics of the inverters. Both tools have simple intuitive surfaces. This enables a quick and easy commissioning.

Optionally to the USB diagnostic adapter, the PC system bus adapter can be used. For this purpose, a CANopen interface must be available at the inverter.



**USB diagnostic adapter incl.
connecting cable to the PC**

- The engineering tools EASY Starter or Engineer are used for operation, parameter setting and diagnostics of the inverters.

Mode		Features	Product key
USB diagnostic adapter	A small image of the USB diagnostic adapter with its connecting cable.	<ul style="list-style-type: none">• Input-side voltage supply via USB connection on PC• Output-side voltage supply via inverter's diagnostic interface• Diagnostic LEDs• Electrical isolation of PC and inverter• Hot-pluggable	E94AZCUS

Connecting cables for USB diagnostic adapter

Mode	Features	Product key
Connecting cable for USB diagnostic adapter	<ul style="list-style-type: none">• Length: 2.5 m	EWL0070
	<ul style="list-style-type: none">• Length: 5 m	EWL0071
	<ul style="list-style-type: none">• Length: 10 m	EWL0072

PC system bus adapter

Instead of a PC, the 8400 inverter drives can alternatively be operated, parameterised and diagnosed using the CANopen interface and a PC system bus adapter, which is required instead of a USB diagnostic adapter. This adapter plugs into the parallel interface or the USB connection of the PC. The corresponding drivers are installed automatically. Depending on the version, the adapter is supplied with voltage via the DIN, PS2 or USB connection of the PC. The CANopen interface is integrated or available with a variant (BaseLine C).

Advantage:

- Operation, parameterisation and diagnostics in parallel with the keypad
- In interconnected systems, multiple inverters can be addressed simultaneously from one point (remote parameterisation via CANopen)



EMF2173IBV003 adapter

Mode	Features	Product key
PC system bus adapter	• Voltage supply via DIN port on PC	EMF2173IB
	• Voltage supply via PS2 connection on PC	EMF2173IBV002
	• Voltage supply via PS2 connection on PC • Electrical isolation from the bus	EMF2173IBV003
	• Voltage supply via USB port on PC	EMF2177IB
	• Electrical isolation from the bus	

Setpoint potentiometer

The setpoint selection (e.g. speed) can be made via an external potentiometer.

The setpoint potentiometer is connected to the analogue input terminal of the inverter. A scale and a rotary knob are also available.



Setpoint potentiometer with scale and rotary knob

Mode	Product key
Potentiometer 10 kOhm / 1 Watt	ERPD0010K0001W
Rotary knob, 36 mm diameter	ERZ0001
Scale 0 ... 100%, 62 mm diameter	ERZ0002

Inverter Drives 8400 BaseLine

Accessories



Lenze SE
Hans-Lenze-Straße 1
D-31855 Aerzen
Phone: +49 (0)5154 / 82-0
Telefax: +49 (0)5154 / 82-28 00

www.Lenze.com