





0 ... 1m



- Analogue output signal 4 ... 20mA
- Teach-in for adaptation to the application

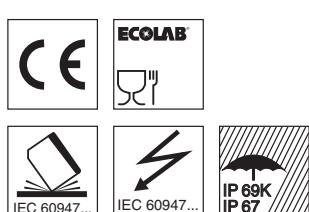


Accessories:

(available separately)

- Mounting system (BT 95)
- M12 connectors (KD ..., K-D ...)
- Reflectors


Dimensioned drawing

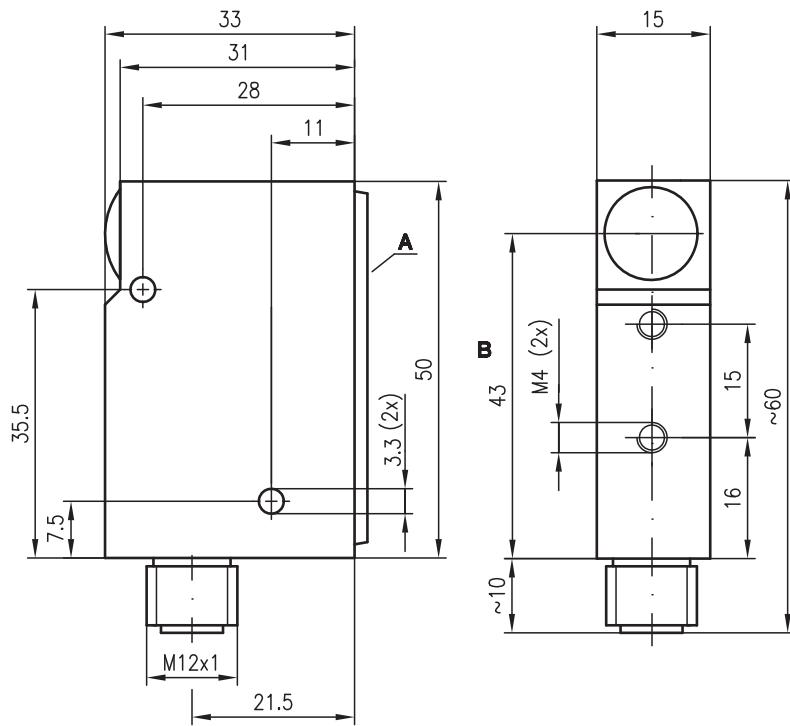

A Indicator diodes

B Optical axis

Electrical connection

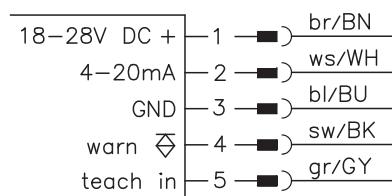

Specifications

Optical data

Typ. operating range limit (MTKS 50x50) ¹⁾	0 ... 1.2 m
Operating range ²⁾	see tables
Recommended reflector	MTKS 50x50.1
Light source	LED (modulated light)
Wavelength	660nm (visible red light, polarized)

Timing

Update time (analog output)	2ms
Delay before start-up	≤ 300ms

Electrical data

Operating voltage U_B	18 ... 28VDC (incl. residual ripple)
Residual ripple	≤ 15 % of U_B
Open-circuit current	≤ 60mA
Analog output	4 ... 20mA non-linearized, $RL \leq 1k\Omega$, 4mA with interrupted light path, 20mA with free light path, 12mA after teach-in 1 % of the maximum value (20mA)
Resolution of analog output	PNP
Warning output	see options
Function of warning output	PNP
Teach input	see options
Function of teach input	see options

Indicators

Green LED, continuous light	voltage supply
Red LED, continuous light	error
Yellow LED, continuous light	light path free

Mechanical data

Housing	diecast zinc
Optics cover	glass
Weight	150g
Connection type	M12 connector, 5-pin, stainless steel

Environmental data

Ambient temp. (operation/storage)	-25°C ... +55°C/-40°C ... +70°C
Protective circuit ³⁾	2, 3
VDE safety class	III
Protection class	IP 67, IP 69K ⁴⁾
Light source	free group (in accordance with EN 62471)
Standards applied	IEC 60947-5-2

Options

Warning output	PNP, static principle
Signal voltage high/low ⁵⁾	$\geq (U_B - 2V) / \leq 2V$
Output current	max. 100mA

Functions

No error	warning output = high
Teach-in without error	warning output = high
Hardware device error	warning output = low
Dynamic error	warning output = low (received signal level outside of permissible range)
Teach-in running	warning output = low
Teach input	PNP
Teach-in active/not active	$U_B / 0V$ or not connected
Teach time	$\geq 20ms$ (analog output supplies measurement value)
Handshake	warning output acknowledges the teach event

1) Typ. operating range limit: max. attainable range without performance reserve

2) Operating range: recommended range with performance reserve

3) 2=polarity reversal protection, 3=short circuit protection for all outputs

4) IP 69K test acc. to DIN 40050 part 9 simulated, high pressure cleaning conditions without the use of additives, acids and bases are not part of the test

5) Functional extra-low voltage with reliable disconnection or protective extra-low voltage (VDE 0100/T 410)

Order guide

Selection table		Order code → IPRK 18/V L.03 Part no. 50100974					
Equipment ↓							
Switching output	1 PNP warning output	●					
Analog output	4 ... 20mA	●					
Options	Teach via control cable	●					

Tables

Reflectors	Operating range
1 MTKS	50x50.1
2 Tape 6	50x50

1	0	1.0	1.2
2	0	1.0	1.2

 Operating range [m]
 Typ. operating range limit [m]

MTKS ... = screw type

Teach-in process

1. Align sensor with reflector. The beam must not fall outside the reflector area!
2. Place the object to be scanned in the beam path.
3. Perform teach-in (teach-in input low -> high -> low).
4. Following teach-in, analog output exhibits approx. 12mA.

Remarks

Operate in accordance with intended use!

- ↳ This product is not a safety sensor and is not intended as personnel protection.
- ↳ The product may only be put into operation by competent persons.
- ↳ Only use the product in accordance with the intended use.

- Following successful teach-in, the sensor supplies approx. 12mA.
- The analog output supplies a measurement value even in the event of an error.
- The light spot may not exceed the reflector.
- Preferably use MTK(S) or tape 6.
- For foil 6 the sensor's side edge must be aligned parallel to the side edge of the reflective tape.