



AF series

Accessories for CF optical fibres



features

- Wide range of collimator lenses
- IP67 protection degree
- SSF – FS1 – FX3 – FX4 series connectable
- 90° optic deviator accessory
- Accessory adapter for fibre diameter from 1 to 2 mm
- Approvals: CE

web contents

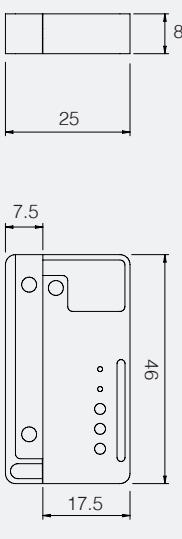


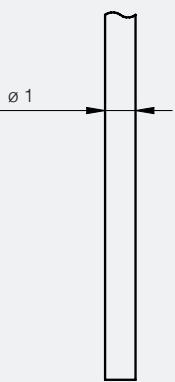
- Application notes
- Photos
- Catalogue / Manuals



ordering system

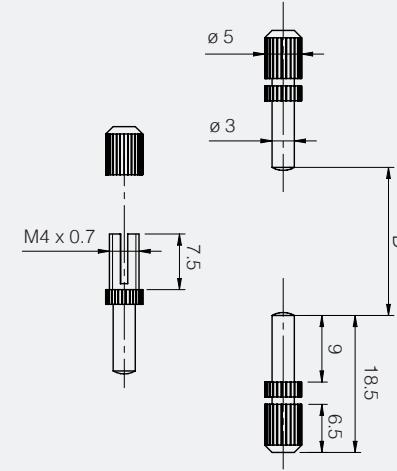
models	accessory type	type	SSF (EX.G.=1)	FS1 (EX.G.=1)	FX3 (EX.G.=1)	FX4 (EX.G.=1)	F1R	F2R	F6R	lenses	fibre model	Ø optical fibre core
AF/C	cutter											
AF/1S	fibre to sell by metres	-	-	-	-	-	-	-	-	-		
AF/ER4			600 mm	600 mm	2,000 mm	3,000 mm	1,500 mm	700 mm	3,000 mm			
AF/ER5	collimator lenses	P/R	1,000 mm	1,000 mm	3,000 mm	5,000 mm	2,200 mm	1,000 mm	4,500 mm	●	AF/1S	1
AF/ER6			3,500 mm	3,500 mm	6,000 mm	8,000 mm	4,500 mm	2,000 mm	6,000 mm			
AF/ER7			1,000 mm	1,000 mm								

cutter model AF/C		
product	main features	dimensions (mm)
	<p>Ø optical fibre core 1 mm (plastic)</p> <p>NOTE: Before inserting the optical fibre into the fibre-head, cut it using the supplied cutter. In order to obtain the best performances the accuracy of fibre-cutting is fundamental.</p>	

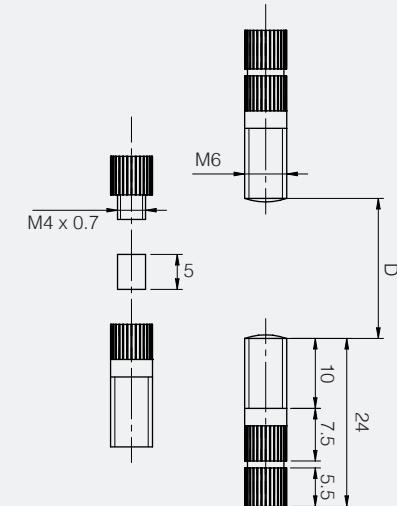
optical fibre AF/1S model		
product	main features	dimensions (mm)
	<p>Ø optical fibre core 1 mm</p> <p>Ø optical fibre 2.2 mm (plastico)</p> <p>optical fibre single - sold by the meter</p>	



collimator lenses AF/ER4 model

product	main features	dimensions (mm)																								
	<table border="1"> <tr> <td>optical fibre code</td> <td>AF/1S</td> </tr> <tr> <td>Ø optical fibre core</td> <td>2.2 mm (plastic)</td> </tr> <tr> <td>distance (with SSF)</td> <td>600 mm</td> </tr> <tr> <td>distance (with FS1)</td> <td>600 mm</td> </tr> <tr> <td>distance (with FX3)</td> <td>2,000 mm</td> </tr> <tr> <td>distance (with FX4)</td> <td>3,000 mm</td> </tr> <tr> <td>distance (with F1R)</td> <td>1,500 mm</td> </tr> <tr> <td>distance (with F2R)</td> <td>700 mm</td> </tr> <tr> <td>distance (with F6R)</td> <td>3,000 mm</td> </tr> <tr> <td>protection degree</td> <td>IP67 (EN60529)</td> </tr> <tr> <td>temperature range</td> <td>-40°C....+70°C</td> </tr> <tr> <td>materials</td> <td>glass, ETM, nickel plated brass</td> </tr> </table>	optical fibre code	AF/1S	Ø optical fibre core	2.2 mm (plastic)	distance (with SSF)	600 mm	distance (with FS1)	600 mm	distance (with FX3)	2,000 mm	distance (with FX4)	3,000 mm	distance (with F1R)	1,500 mm	distance (with F2R)	700 mm	distance (with F6R)	3,000 mm	protection degree	IP67 (EN60529)	temperature range	-40°C....+70°C	materials	glass, ETM, nickel plated brass	
optical fibre code	AF/1S																									
Ø optical fibre core	2.2 mm (plastic)																									
distance (with SSF)	600 mm																									
distance (with FS1)	600 mm																									
distance (with FX3)	2,000 mm																									
distance (with FX4)	3,000 mm																									
distance (with F1R)	1,500 mm																									
distance (with F2R)	700 mm																									
distance (with F6R)	3,000 mm																									
protection degree	IP67 (EN60529)																									
temperature range	-40°C....+70°C																									
materials	glass, ETM, nickel plated brass																									

collimator lenses AF/ER5 model

product	main features	dimensions (mm)																								
	<table border="1"> <tr> <td>optical fibre code</td> <td>AF/1S</td> </tr> <tr> <td>Ø optical fibre core</td> <td>2.2 mm (plastic)</td> </tr> <tr> <td>distance (with SSF)</td> <td>1,000 mm</td> </tr> <tr> <td>distance (with FS1)</td> <td>1,000 mm</td> </tr> <tr> <td>distance (with FX3)</td> <td>3,000 mm</td> </tr> <tr> <td>distance (with FX4)</td> <td>5,000 mm</td> </tr> <tr> <td>distance (with F1R)</td> <td>2,200 mm</td> </tr> <tr> <td>distance (with F2R)</td> <td>1,000 mm</td> </tr> <tr> <td>distance (with F6R)</td> <td>4,500 mm</td> </tr> <tr> <td>protection degree</td> <td>IP67 (EN60529)</td> </tr> <tr> <td>temperature range</td> <td>-40°C....+70°C</td> </tr> <tr> <td>materials</td> <td>glass, ETM, nickel plated brass</td> </tr> </table>	optical fibre code	AF/1S	Ø optical fibre core	2.2 mm (plastic)	distance (with SSF)	1,000 mm	distance (with FS1)	1,000 mm	distance (with FX3)	3,000 mm	distance (with FX4)	5,000 mm	distance (with F1R)	2,200 mm	distance (with F2R)	1,000 mm	distance (with F6R)	4,500 mm	protection degree	IP67 (EN60529)	temperature range	-40°C....+70°C	materials	glass, ETM, nickel plated brass	
optical fibre code	AF/1S																									
Ø optical fibre core	2.2 mm (plastic)																									
distance (with SSF)	1,000 mm																									
distance (with FS1)	1,000 mm																									
distance (with FX3)	3,000 mm																									
distance (with FX4)	5,000 mm																									
distance (with F1R)	2,200 mm																									
distance (with F2R)	1,000 mm																									
distance (with F6R)	4,500 mm																									
protection degree	IP67 (EN60529)																									
temperature range	-40°C....+70°C																									
materials	glass, ETM, nickel plated brass																									

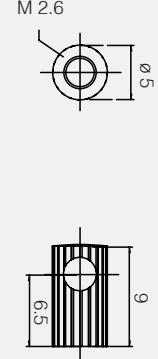


collimator lenses AF/ER6 model																										
product	main features	dimensions (mm)																								
	<table border="1"> <tr><td>optical fibre code</td><td>AF/1S</td></tr> <tr><td>Ø optical fibre core</td><td>2.2 mm (plastic)</td></tr> <tr><td>distance (with SSF)</td><td>3,500 mm</td></tr> <tr><td>distance (with FS1)</td><td>3,500 mm</td></tr> <tr><td>distance (with FX3)</td><td>6,000 mm</td></tr> <tr><td>distance (with FX4)</td><td>8,000 mm</td></tr> <tr><td>distance (with F1R)</td><td>4,500 mm</td></tr> <tr><td>distance (with F2R)</td><td>2,000 mm</td></tr> <tr><td>distance (with F6R)</td><td>6,000 mm</td></tr> <tr><td>protection degree</td><td>IP67 (EN60529)</td></tr> <tr><td>temperature range</td><td>-40°C....+70°C</td></tr> <tr><td>materials</td><td>glass, ETM, nickel plated brass</td></tr> </table>	optical fibre code	AF/1S	Ø optical fibre core	2.2 mm (plastic)	distance (with SSF)	3,500 mm	distance (with FS1)	3,500 mm	distance (with FX3)	6,000 mm	distance (with FX4)	8,000 mm	distance (with F1R)	4,500 mm	distance (with F2R)	2,000 mm	distance (with F6R)	6,000 mm	protection degree	IP67 (EN60529)	temperature range	-40°C....+70°C	materials	glass, ETM, nickel plated brass	
optical fibre code	AF/1S																									
Ø optical fibre core	2.2 mm (plastic)																									
distance (with SSF)	3,500 mm																									
distance (with FS1)	3,500 mm																									
distance (with FX3)	6,000 mm																									
distance (with FX4)	8,000 mm																									
distance (with F1R)	4,500 mm																									
distance (with F2R)	2,000 mm																									
distance (with F6R)	6,000 mm																									
protection degree	IP67 (EN60529)																									
temperature range	-40°C....+70°C																									
materials	glass, ETM, nickel plated brass																									

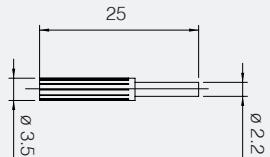
collimator lenses AF/ER7 model																										
product	main features	dimensions (mm)																								
	<table border="1"> <tr><td>optical fibre code</td><td>AF/1S</td></tr> <tr><td>Ø optical fibre core</td><td>2.2 mm (plastic)</td></tr> <tr><td>distance (with SSF)</td><td>1,000 mm</td></tr> <tr><td>distance (with FS1)</td><td>1,000 mm</td></tr> <tr><td>distance (with FX3)</td><td>6,000 mm</td></tr> <tr><td>distance (with FX4)</td><td>8,000 mm</td></tr> <tr><td>distance (with F1R)</td><td>4,500 mm</td></tr> <tr><td>distance (with F2R)</td><td>2,000 mm</td></tr> <tr><td>distance (with F6R)</td><td>6,000 mm</td></tr> <tr><td>protection degree</td><td>IP67 (EN60529)</td></tr> <tr><td>temperature range</td><td>-40°C....+70°C</td></tr> <tr><td>materials</td><td>glass, ETM, nickel plated brass</td></tr> </table>	optical fibre code	AF/1S	Ø optical fibre core	2.2 mm (plastic)	distance (with SSF)	1,000 mm	distance (with FS1)	1,000 mm	distance (with FX3)	6,000 mm	distance (with FX4)	8,000 mm	distance (with F1R)	4,500 mm	distance (with F2R)	2,000 mm	distance (with F6R)	6,000 mm	protection degree	IP67 (EN60529)	temperature range	-40°C....+70°C	materials	glass, ETM, nickel plated brass	
optical fibre code	AF/1S																									
Ø optical fibre core	2.2 mm (plastic)																									
distance (with SSF)	1,000 mm																									
distance (with FS1)	1,000 mm																									
distance (with FX3)	6,000 mm																									
distance (with FX4)	8,000 mm																									
distance (with F1R)	4,500 mm																									
distance (with F2R)	2,000 mm																									
distance (with F6R)	6,000 mm																									
protection degree	IP67 (EN60529)																									
temperature range	-40°C....+70°C																									
materials	glass, ETM, nickel plated brass																									



collimator lenses AF/ER9 model

product	main features	dimensions (mm)																						
	<table border="1"> <tr> <td>type</td> <td>P/R</td> </tr> <tr> <td>accessory type</td> <td>90° optic deviator accessory</td> </tr> <tr> <td>SSF (EG =1)</td> <td>120 mm</td> </tr> <tr> <td>FS1 (EG =1)</td> <td>120 mm</td> </tr> <tr> <td>FX3 (EG =1)</td> <td>700 mm</td> </tr> <tr> <td>FX4 (EG =1)</td> <td>700 mm</td> </tr> <tr> <td>F1R</td> <td>400 mm</td> </tr> <tr> <td>F2R</td> <td>200 mm</td> </tr> <tr> <td>F6R</td> <td>800 mm</td> </tr> <tr> <td>Ø optical fibre core</td> <td>1</td> </tr> <tr> <td>fibre model</td> <td>CF/RB3-20</td> </tr> </table>	type	P/R	accessory type	90° optic deviator accessory	SSF (EG =1)	120 mm	FS1 (EG =1)	120 mm	FX3 (EG =1)	700 mm	FX4 (EG =1)	700 mm	F1R	400 mm	F2R	200 mm	F6R	800 mm	Ø optical fibre core	1	fibre model	CF/RB3-20	
type	P/R																							
accessory type	90° optic deviator accessory																							
SSF (EG =1)	120 mm																							
FS1 (EG =1)	120 mm																							
FX3 (EG =1)	700 mm																							
FX4 (EG =1)	700 mm																							
F1R	400 mm																							
F2R	200 mm																							
F6R	800 mm																							
Ø optical fibre core	1																							
fibre model	CF/RB3-20																							

collimator lenses AF/1A2 model

product	main features	dimensions (mm)				
	<table border="1"> <tr> <td>type</td> <td>accessory adapter for fibre diameter from 1 to 2 mm</td> </tr> <tr> <td>fibre model</td> <td>all optical fibres models with Ø 1 mm</td> </tr> </table>	type	accessory adapter for fibre diameter from 1 to 2 mm	fibre model	all optical fibres models with Ø 1 mm	
type	accessory adapter for fibre diameter from 1 to 2 mm					
fibre model	all optical fibres models with Ø 1 mm					



product	main features	dimensions (mm)																						
	<table><tr><td>type</td><td>P/R</td></tr><tr><td>accessory type</td><td>right angle beam adapter</td></tr><tr><td>SSF (EG =1)</td><td>700 mm</td></tr><tr><td>FS1 (EG =1)</td><td>700 mm</td></tr><tr><td>FX3 (EG =1)</td><td>4,200 mm</td></tr><tr><td>FX4 (EG =1)</td><td>5,600 mm</td></tr><tr><td>F1R</td><td>1,500 mm</td></tr><tr><td>F2R</td><td>1,000 mm</td></tr><tr><td>F6R</td><td>3,000 mm</td></tr><tr><td>Ø optical fibre core</td><td>-</td></tr><tr><td>fibre model</td><td>CF/RBA-** CF/RCA-20</td></tr></table>	type	P/R	accessory type	right angle beam adapter	SSF (EG =1)	700 mm	FS1 (EG =1)	700 mm	FX3 (EG =1)	4,200 mm	FX4 (EG =1)	5,600 mm	F1R	1,500 mm	F2R	1,000 mm	F6R	3,000 mm	Ø optical fibre core	-	fibre model	CF/RBA-** CF/RCA-20	
type	P/R																							
accessory type	right angle beam adapter																							
SSF (EG =1)	700 mm																							
FS1 (EG =1)	700 mm																							
FX3 (EG =1)	4,200 mm																							
FX4 (EG =1)	5,600 mm																							
F1R	1,500 mm																							
F2R	1,000 mm																							
F6R	3,000 mm																							
Ø optical fibre core	-																							
fibre model	CF/RBA-** CF/RCA-20																							