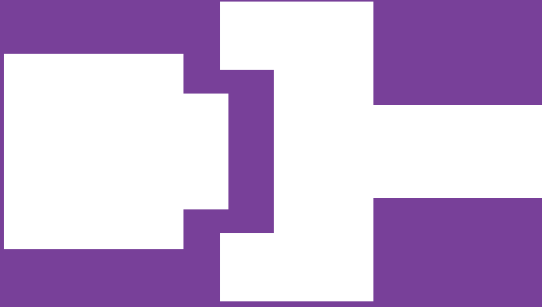




Connectors



available models

connectors with PVC cable

plug	wires	led	axial	right angle	length (m)
M8	3	-	CD08/0A-***A1	CD08/0A-***C1	2 - 5 - 10
	4		CD08/0B-***A1	CD08/0B-***C1	
M12	3 NO		CD12M/AA-***A1	CD12M/AA-***C1	
	4		CD12M/0B-***A1	CD12M/0B-***C1	
	3 NO-NPN	2 led	-	CD12M/NA-***C1	
	3 NO-NPN			CD12M/PA-***C1	
	4 NO/NC-PNP			CD12M/VB-***C1	
	4 DECOUT ®	Bi-led		CD12M/DB-***C1	
M12 IP69K	4	-	CD12F/0B-050A1	CD12F/0B-050C1	5
		3	-	CD12F/LB-050C1	

available models

connectors with PUR cable

plug	wires	led	axial	right angle	length (m)
M8	3	-	CD08/0A-***A5	CD08/0A-***C5	2 - 5 - 10
	4		CD08/0B-***A5	CD08/0B-***C5	
M12	3		CD12M/AA-***A5	CD12M/AA-***C5	
	4		CD12M/0B-***A5	CD12M/0B-***C5	
	4	3	-	CD12M/LB-***C5	5 - 10
	5	-	CD12M/0H-***A5	CD12M/0H-***C5	2 - 5 - 10
	8		CD12M/0X-***A5	-	5 - 10 - 15
M12 (AC)	3		CD12M/AC-050A5	CD12M/AC-050C5	5



available models

connectors without cable

plug	type	connection	wires	axial	right angle
M8	male	spring terminals	3	CV08/1A-00A	-
			4	CV08/1B-00A	-
		screw terminals	3	CV08/0A-00A	-
			4	CV08/0B-00A	-
	female	spring terminals	3	CL08/1A-00A	-
			4	CL08/1B-00A	-
		screw terminals	3	CL08/0A-00A	-
			4	CL08/0B-00A	-
M12	male		4	CV12/0B-00A	CV12/0B-00B
	female			CL12/0B-00A	CL12/0B-00C
	male		5	CV12/0H-00A	CV12/0H-00C
	female			CL12/0H-00A	CL12/0H-00C

available models

in line plug connectors

plug	type	connection	wires	model	cable diameter
M8	male	in line	4	CDV-37	ø 3,75 mm
				CDV-47	ø 4,7 mm
				CDV-50	ø 5 mm
				CDV-55	ø 5,5 mm

available models

extension cable

plug	wires	female plug	male plug	model	length (m)
M8	3	axial	axial	CDP08/0A-***AA	(*)
M12	4			CDP08/0B-***AA	
				CDP12/0B-***AA	

(*)= Please contact M.D. Sales Department for cable length and possible minimum orderable quantity.



available models

extended temperature connectors (-25°C...+105°C)

connector	nr. of wires	led	axial	right angle	length (m)
M12	4	-	CD12M/0B-***A1HT	CD12M/0B-***C1HT	5 - 10

available models

connectors with PVC cable and cCSAus certification

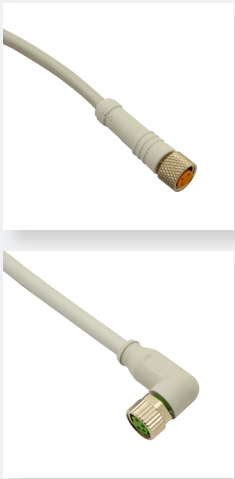
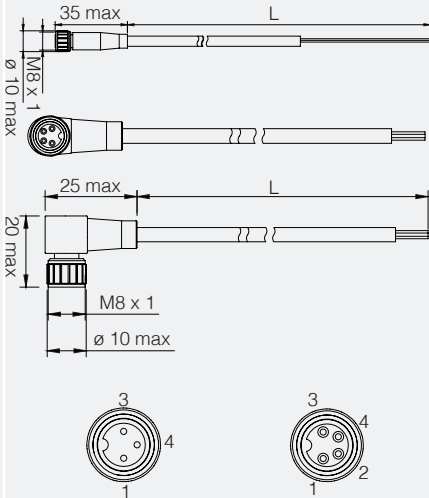
connector	nr. of wires	led	axial	right angle	length (m)
M8	3	-	CD08/0A-***A1US	CD08/0A-***C1US	5 - 10 - 15
			CD08/0B-***A1US	CD08/0B-***C1US	
M12	4		CD12/0B-***A1US	CD12/0B-***C1US	

available models

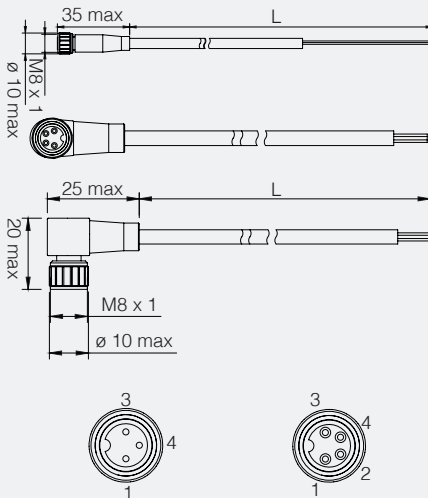
connectors with PUR cable and cCSAus certification

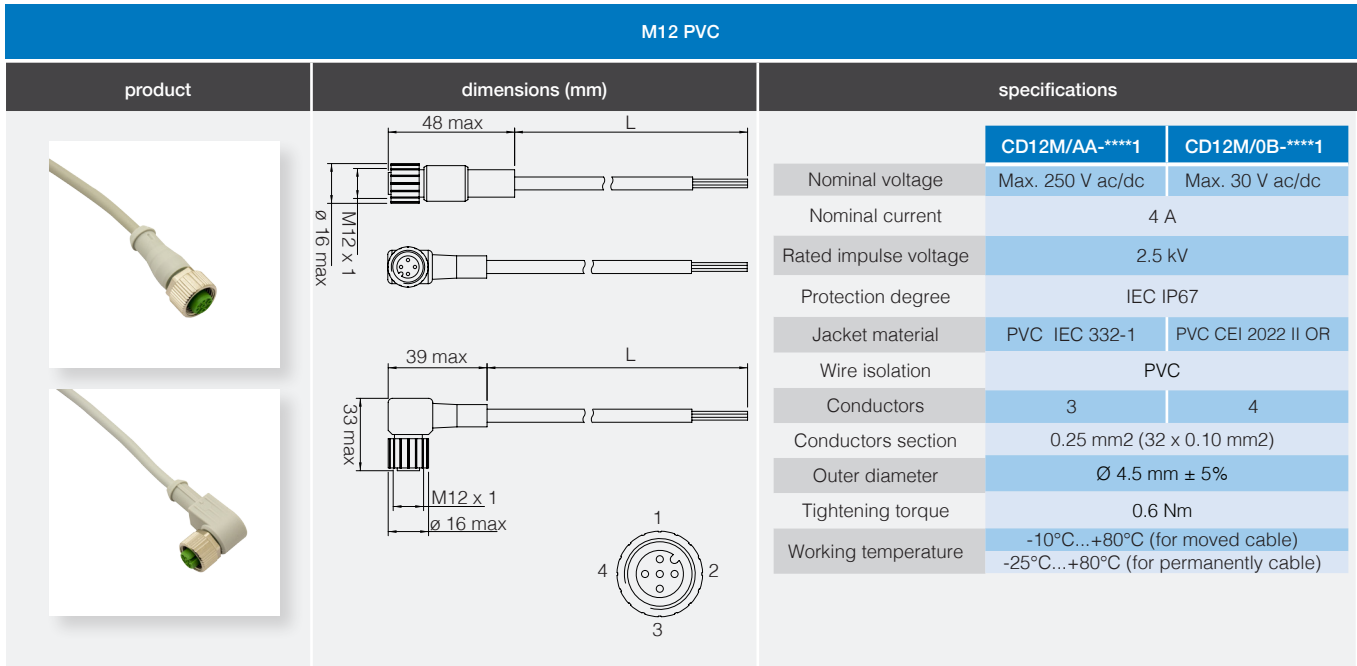
connector	nr. of wires	led	axial	right angle	length (m)
M8	3	-	CD08/0A-***A5US	CD08/0A-***C5US	5 - 10 - 15
			CD08/0B-***A5US	CD08/0B-***C5US	
M12	4		CD12/0B-***A5US	CD12/0B-***C5US	

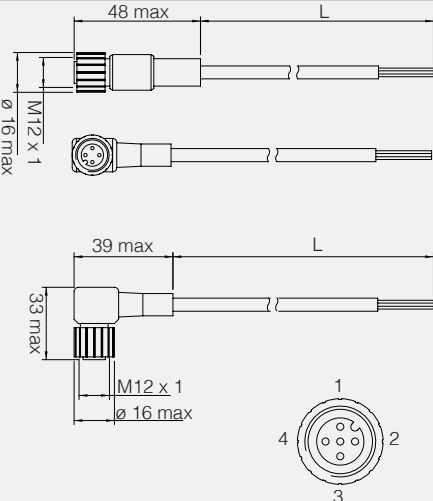
M8 PVC

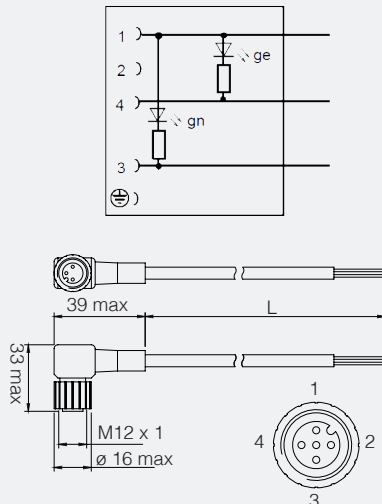
product	dimensions (mm)	specifications																																				
		<table border="1"> <thead> <tr> <th></th><th>CD08/0A-****1</th><th>CD08/0B-****1</th></tr> </thead> <tbody> <tr> <td>Nominal voltage</td><td>Max. 60 V ac/dc</td><td>Max. 30 V ac/dc</td></tr> <tr> <td>Nominal current</td><td colspan="2">4 A</td></tr> <tr> <td>Rated impulse voltage</td><td colspan="2">0,8 kV</td></tr> <tr> <td>Protection degree</td><td colspan="2">IEC IP67</td></tr> <tr> <td>Jacket material</td><td>PVC IEC 332-1</td><td>PVC CEI 2022 II OR</td></tr> <tr> <td>Wire isolation</td><td colspan="2">PVC</td></tr> <tr> <td>Conductors</td><td>3</td><td>4</td></tr> <tr> <td>Conductors section</td><td colspan="2">0,25 mm² (32 x 0,10 mm²)</td></tr> <tr> <td>Outer diameter</td><td colspan="2">Ø 4.5 mm ± 5%</td></tr> <tr> <td>Tightening torque</td><td colspan="2">0,4 Nm</td></tr> <tr> <td>Working temperature</td><td colspan="2">-10°C...+80°C (for moved cable) -25°C...+80°C (for permanently cable)</td></tr> </tbody> </table>		CD08/0A-****1	CD08/0B-****1	Nominal voltage	Max. 60 V ac/dc	Max. 30 V ac/dc	Nominal current	4 A		Rated impulse voltage	0,8 kV		Protection degree	IEC IP67		Jacket material	PVC IEC 332-1	PVC CEI 2022 II OR	Wire isolation	PVC		Conductors	3	4	Conductors section	0,25 mm ² (32 x 0,10 mm ²)		Outer diameter	Ø 4.5 mm ± 5%		Tightening torque	0,4 Nm		Working temperature	-10°C...+80°C (for moved cable) -25°C...+80°C (for permanently cable)	
	CD08/0A-****1	CD08/0B-****1																																				
Nominal voltage	Max. 60 V ac/dc	Max. 30 V ac/dc																																				
Nominal current	4 A																																					
Rated impulse voltage	0,8 kV																																					
Protection degree	IEC IP67																																					
Jacket material	PVC IEC 332-1	PVC CEI 2022 II OR																																				
Wire isolation	PVC																																					
Conductors	3	4																																				
Conductors section	0,25 mm ² (32 x 0,10 mm ²)																																					
Outer diameter	Ø 4.5 mm ± 5%																																					
Tightening torque	0,4 Nm																																					
Working temperature	-10°C...+80°C (for moved cable) -25°C...+80°C (for permanently cable)																																					

M8 PUR

product	dimensions (mm)	specifications		
		CD08/0A-****5	CD08/0B-****5	
		Nominal voltage	Max. 60 V ac/dc	Max. 30 V ac/dc
		Nominal current	4 A	
		Rated impulse voltage	1.5 kV	
		Protection degree	IEC IP67	
		Jacket material	PUR	
		Wire isolation	PVC	
		Conductors	3	4
		Conductors section	0.25 mm²(32x0.10 mm²)	0.25 mm²(32x0.10 mm²)
		Outer diameter	Ø 3.75 mm±0.2mm	Ø 4.7 mm ± 0.2mm
		Tightening torque	0.4 Nm	
		Working temperature	-5°C...+80°C (for moved cable)	-5°C...+80°C (for moved cable)
			-20°C...+80°C (for permanently cable)	-30°C...+70°C (for permanently cable)


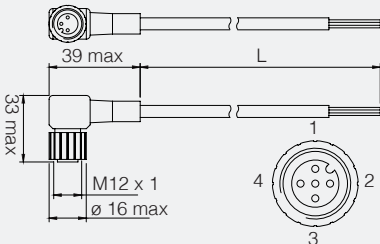


M12 PUR				
product	dimensions (mm)	specifications		
		CD12M/AA-****5	CD12M/0B-****5	
		Nominal voltage	Max. 250 V ac/dc	
		Nominal current	4 A	
		Rated impulse voltage	2.5 kV	
		Protection degree	IEC IP67	
		Jacket material	PUR	
		Wire isolation	PVC	
		Conductors	3	4
		Conductors section	0.25 mm ² (32 x 0,10 mm ²)	
		Outer diameter	Ø 3.75 mm±0,2mm	Ø 4.7 mm ± 5%
		Tightening torque	0.6 Nm	
		Working temperature	-5°C...+80°C (for moved cable)	
			-20°C...+80°C (for permanently cable)	

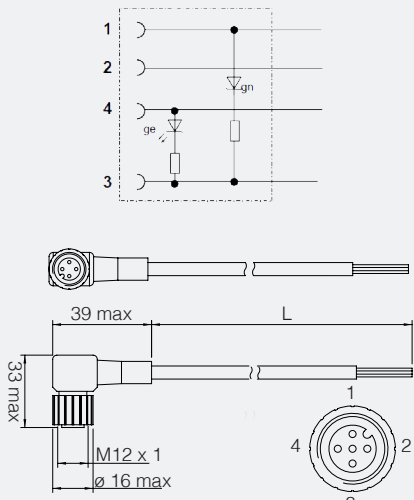
M12 LED 3 wires NO/NPN																										
product	dimensions (mm)	specifications																								
		<table><tr><th></th><th>CD12M/NA-***C1</th></tr><tr><td>Nominal voltage</td><td>Max. 250 V ac/dc</td></tr><tr><td>Nominal current</td><td>4 A</td></tr><tr><td>Rated impulse voltage</td><td>2.5 kV</td></tr><tr><td>Protection degree</td><td>IEC IP67</td></tr><tr><td>Jacket material</td><td>PVC CEI 2022 II OR</td></tr><tr><td>Wire isolation</td><td>PVC</td></tr><tr><td>Conductors</td><td>4</td></tr><tr><td>Conductors section</td><td>0.25 mm² (32 x 0,10 mm²)</td></tr><tr><td>Outer diameter</td><td>Ø 4.5 mm ± 5%</td></tr><tr><td>Tightening torque</td><td>0.6 Nm</td></tr><tr><td>Working temperature</td><td>-10°C...+80°C (for moved cable) -25°C...+80°C (for permanently cable)</td></tr></table>		CD12M/NA-***C1	Nominal voltage	Max. 250 V ac/dc	Nominal current	4 A	Rated impulse voltage	2.5 kV	Protection degree	IEC IP67	Jacket material	PVC CEI 2022 II OR	Wire isolation	PVC	Conductors	4	Conductors section	0.25 mm² (32 x 0,10 mm²)	Outer diameter	Ø 4.5 mm ± 5%	Tightening torque	0.6 Nm	Working temperature	-10°C...+80°C (for moved cable) -25°C...+80°C (for permanently cable)
			CD12M/NA-***C1																							
Nominal voltage	Max. 250 V ac/dc																									
Nominal current	4 A																									
Rated impulse voltage	2.5 kV																									
Protection degree	IEC IP67																									
Jacket material	PVC CEI 2022 II OR																									
Wire isolation	PVC																									
Conductors	4																									
Conductors section	0.25 mm² (32 x 0,10 mm²)																									
Outer diameter	Ø 4.5 mm ± 5%																									
Tightening torque	0.6 Nm																									
Working temperature	-10°C...+80°C (for moved cable) -25°C...+80°C (for permanently cable)																									



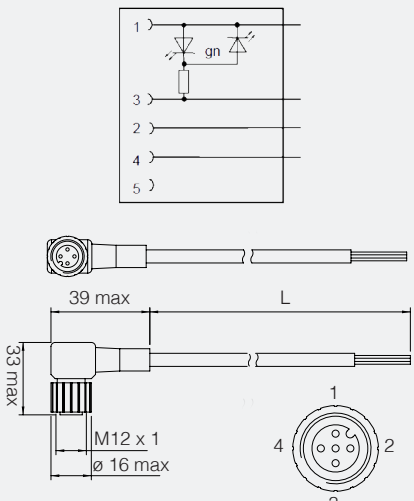
M12 LED 3 wires NO/PNP

product	dimensions (mm)	specifications																								
		<table><tr><th colspan="2">CD12M/PA-***C1</th></tr><tr><td>Nominal voltage</td><td>Max. 250 V ac/dc</td></tr><tr><td>Nominal current</td><td>4 A</td></tr><tr><td>Rated impulse voltage</td><td>2.5 kV</td></tr><tr><td>Protection degree</td><td>IEC IP67</td></tr><tr><td>Jacket material</td><td>PVC CEI 2022 II OR</td></tr><tr><td>Wire isolation</td><td>PVC</td></tr><tr><td>Conductors</td><td>4</td></tr><tr><td>Conductors section</td><td>0.25 mm² (32 x 0.10 mm²)</td></tr><tr><td>Outer diameter</td><td>Ø 4.5 mm ± 5%</td></tr><tr><td>Tightening torque</td><td>0.6 Nm</td></tr><tr><td>Working temperature</td><td>-10°C...+80°C (for moved cable) -25°C...+80°C (for permanently cable)</td></tr></table>	CD12M/PA-***C1		Nominal voltage	Max. 250 V ac/dc	Nominal current	4 A	Rated impulse voltage	2.5 kV	Protection degree	IEC IP67	Jacket material	PVC CEI 2022 II OR	Wire isolation	PVC	Conductors	4	Conductors section	0.25 mm² (32 x 0.10 mm²)	Outer diameter	Ø 4.5 mm ± 5%	Tightening torque	0.6 Nm	Working temperature	-10°C...+80°C (for moved cable) -25°C...+80°C (for permanently cable)
	CD12M/PA-***C1																									
Nominal voltage	Max. 250 V ac/dc																									
Nominal current	4 A																									
Rated impulse voltage	2.5 kV																									
Protection degree	IEC IP67																									
Jacket material	PVC CEI 2022 II OR																									
Wire isolation	PVC																									
Conductors	4																									
Conductors section	0.25 mm² (32 x 0.10 mm²)																									
Outer diameter	Ø 4.5 mm ± 5%																									
Tightening torque	0.6 Nm																									
Working temperature	-10°C...+80°C (for moved cable) -25°C...+80°C (for permanently cable)																									
																										

M12 LED 4 wires NO/NC - PNP

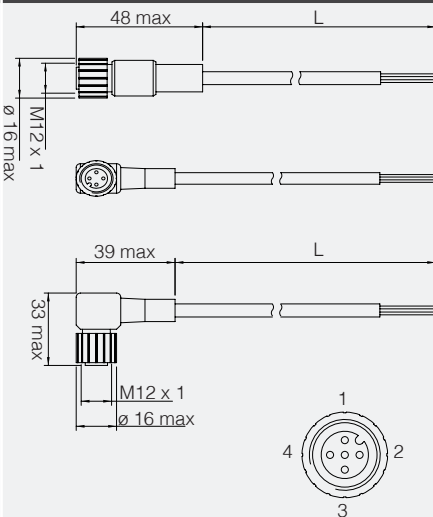
product	dimensions (mm)	specifications																				
		CD12M/VB-***C1																				
		<table><tr><td>Nominal voltage</td><td>Max. 250 V ac/dc</td></tr><tr><td>Nominal current</td><td>4 A</td></tr><tr><td>Rated impulse voltage</td><td>2.5 kV</td></tr><tr><td>Protection degree</td><td>IEC IP67</td></tr><tr><td>Jacket material</td><td>PVC CEI 2022 II OR</td></tr><tr><td>Wire isolation</td><td>PVC</td></tr><tr><td>Conductors</td><td>4</td></tr><tr><td>Conductors section</td><td>0.25 mm² (32 x 0.10 mm²)</td></tr><tr><td>Outer diameter</td><td>Ø 4.5 mm ± 5%</td></tr><tr><td>Tightening torque</td><td>0.6 Nm</td></tr><tr><td>Working temperature</td><td>-10°C...+80°C (for moved cable) -25°C...+80°C (for permanently cable)</td></tr></table>	Nominal voltage	Max. 250 V ac/dc	Nominal current	4 A	Rated impulse voltage	2.5 kV	Protection degree	IEC IP67	Jacket material	PVC CEI 2022 II OR	Wire isolation	PVC	Conductors	4	Conductors section	0.25 mm ² (32 x 0.10 mm ²)	Outer diameter	Ø 4.5 mm ± 5%	Tightening torque	0.6 Nm
Nominal voltage	Max. 250 V ac/dc																					
Nominal current	4 A																					
Rated impulse voltage	2.5 kV																					
Protection degree	IEC IP67																					
Jacket material	PVC CEI 2022 II OR																					
Wire isolation	PVC																					
Conductors	4																					
Conductors section	0.25 mm ² (32 x 0.10 mm ²)																					
Outer diameter	Ø 4.5 mm ± 5%																					
Tightening torque	0.6 Nm																					
Working temperature	-10°C...+80°C (for moved cable) -25°C...+80°C (for permanently cable)																					

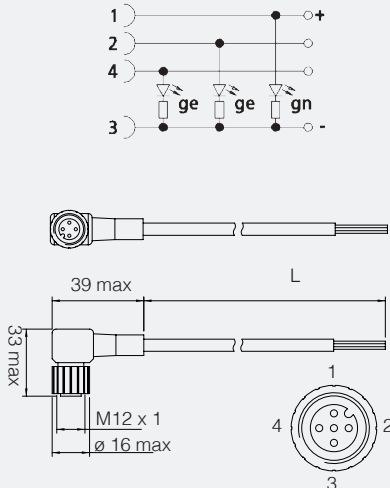
M12 LED 4 wires DECOU®

product	dimensions (mm)	specifications																				
		CD12M/DB-***C1																				
		<table><tr><td>Nominal voltage</td><td>Max. 250 V ac/dc</td></tr><tr><td>Nominal current</td><td>4 A</td></tr><tr><td>Rated impulse voltage</td><td>2.5 kV</td></tr><tr><td>Protection degree</td><td>IEC IP67</td></tr><tr><td>Jacket material</td><td>PVC CEI 2022 II OR</td></tr><tr><td>Wire isolation</td><td>PVC</td></tr><tr><td>Conductors</td><td>4</td></tr><tr><td>Conductors section</td><td>0.25 mm² (32 x 0.10 mm²)</td></tr><tr><td>Outer diameter</td><td>Ø 4.5 mm ± 5%</td></tr><tr><td>Tightening torque</td><td>0.6 Nm</td></tr><tr><td>Working temperature</td><td>-10°C...+80°C (for moved cable) -25°C...+80°C (for permanently cable)</td></tr></table>	Nominal voltage	Max. 250 V ac/dc	Nominal current	4 A	Rated impulse voltage	2.5 kV	Protection degree	IEC IP67	Jacket material	PVC CEI 2022 II OR	Wire isolation	PVC	Conductors	4	Conductors section	0.25 mm ² (32 x 0.10 mm ²)	Outer diameter	Ø 4.5 mm ± 5%	Tightening torque	0.6 Nm
Nominal voltage	Max. 250 V ac/dc																					
Nominal current	4 A																					
Rated impulse voltage	2.5 kV																					
Protection degree	IEC IP67																					
Jacket material	PVC CEI 2022 II OR																					
Wire isolation	PVC																					
Conductors	4																					
Conductors section	0.25 mm ² (32 x 0.10 mm ²)																					
Outer diameter	Ø 4.5 mm ± 5%																					
Tightening torque	0.6 Nm																					
Working temperature	-10°C...+80°C (for moved cable) -25°C...+80°C (for permanently cable)																					

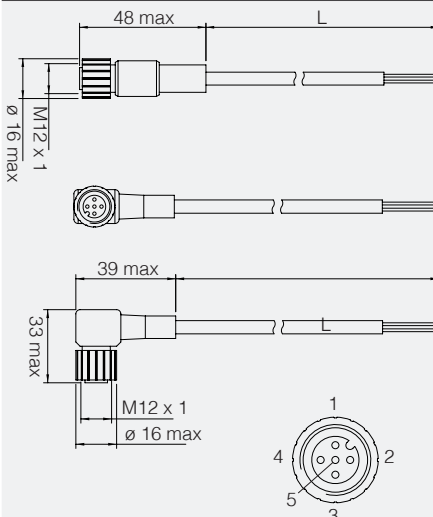


M12 IP69K

product	dimensions (mm)	specifications																								
		<table><tr><th></th><th>CD12F/0B-****1</th></tr><tr><td>Nominal voltage</td><td>Max. 240 V ac/dc</td></tr><tr><td>Nominal current</td><td>4 A</td></tr><tr><td>Rated impulse voltage</td><td>2 kV</td></tr><tr><td>Protection degree</td><td>IEC IP67 / IP69K</td></tr><tr><td>Jacket material</td><td>PVC</td></tr><tr><td>Wire isolation</td><td>PVC</td></tr><tr><td>Conductors</td><td>4</td></tr><tr><td>Conductors section</td><td>0.25 mm² (32 x 0.10 mm²)</td></tr><tr><td>Outer diameter</td><td>Ø 4.5 mm ± 5%</td></tr><tr><td>Tightening torque</td><td>0.6 Nm</td></tr><tr><td>Working temperature</td><td>-27°C...+70°C (for moved cable)</td></tr></table>		CD12F/0B-****1	Nominal voltage	Max. 240 V ac/dc	Nominal current	4 A	Rated impulse voltage	2 kV	Protection degree	IEC IP67 / IP69K	Jacket material	PVC	Wire isolation	PVC	Conductors	4	Conductors section	0.25 mm² (32 x 0.10 mm²)	Outer diameter	Ø 4.5 mm ± 5%	Tightening torque	0.6 Nm	Working temperature	-27°C...+70°C (for moved cable)
	CD12F/0B-****1																									
Nominal voltage	Max. 240 V ac/dc																									
Nominal current	4 A																									
Rated impulse voltage	2 kV																									
Protection degree	IEC IP67 / IP69K																									
Jacket material	PVC																									
Wire isolation	PVC																									
Conductors	4																									
Conductors section	0.25 mm² (32 x 0.10 mm²)																									
Outer diameter	Ø 4.5 mm ± 5%																									
Tightening torque	0.6 Nm																									
Working temperature	-27°C...+70°C (for moved cable)																									

product	dimensions (mm)	specifications																		
		<table><tr><th></th><th>CD12F/LB-***C1</th></tr><tr><td>Nominal voltage</td><td>250 V</td></tr><tr><td>Nominal current</td><td>4 A</td></tr><tr><td>Protection degree</td><td>IP 67 / NEMA 6P</td></tr><tr><td>Jacket material</td><td>TPU</td></tr><tr><td>Conductors</td><td>4 x 0.34 mm²</td></tr><tr><td>Wire isolation</td><td>PP</td></tr><tr><td>Outer diameter</td><td>Ø 4.7mm ±0.20 mm</td></tr><tr><td>Working temperature</td><td>-40°C ... +80°C (in stationary position)</td></tr></table>		CD12F/LB-***C1	Nominal voltage	250 V	Nominal current	4 A	Protection degree	IP 67 / NEMA 6P	Jacket material	TPU	Conductors	4 x 0.34 mm ²	Wire isolation	PP	Outer diameter	Ø 4.7mm ±0.20 mm	Working temperature	-40°C ... +80°C (in stationary position)
			CD12F/LB-***C1																	
Nominal voltage	250 V																			
Nominal current	4 A																			
Protection degree	IP 67 / NEMA 6P																			
Jacket material	TPU																			
Conductors	4 x 0.34 mm ²																			
Wire isolation	PP																			
Outer diameter	Ø 4.7mm ±0.20 mm																			
Working temperature	-40°C ... +80°C (in stationary position)																			

CD12M-0H

product	dimensions (mm)	specifications																						
		<table><tr><th></th><th>CD12M/0H-****5</th></tr><tr><td>Nominal voltage</td><td>60 V</td></tr><tr><td>Nominal current</td><td>4 A</td></tr><tr><td>Protection degree</td><td>IEC IP67</td></tr><tr><td>Jacket material</td><td>TPU</td></tr><tr><td>Wire isolation</td><td>TPU</td></tr><tr><td>Conductors</td><td>5</td></tr><tr><td>Conductors section</td><td>0.25 mm² (32 x 0,10 mm²)</td></tr><tr><td>Outer diameter</td><td>Ø 4.5 mm ± 5%</td></tr><tr><td>Tightening torque</td><td>0.6 Nm</td></tr><tr><td>Working temperature</td><td>-5°C...+70°C (for moved cable) -30°C...+80°C (for permanently cable)</td></tr></table>		CD12M/0H-****5	Nominal voltage	60 V	Nominal current	4 A	Protection degree	IEC IP67	Jacket material	TPU	Wire isolation	TPU	Conductors	5	Conductors section	0.25 mm ² (32 x 0,10 mm ²)	Outer diameter	Ø 4.5 mm ± 5%	Tightening torque	0.6 Nm	Working temperature	-5°C...+70°C (for moved cable) -30°C...+80°C (for permanently cable)
	CD12M/0H-****5																							
Nominal voltage	60 V																							
Nominal current	4 A																							
Protection degree	IEC IP67																							
Jacket material	TPU																							
Wire isolation	TPU																							
Conductors	5																							
Conductors section	0.25 mm ² (32 x 0,10 mm ²)																							
Outer diameter	Ø 4.5 mm ± 5%																							
Tightening torque	0.6 Nm																							
Working temperature	-5°C...+70°C (for moved cable) -30°C...+80°C (for permanently cable)																							

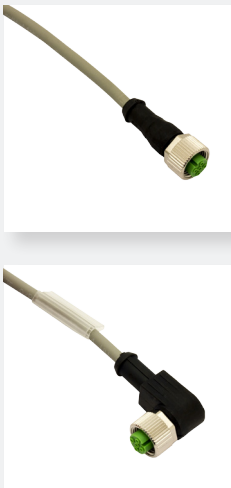
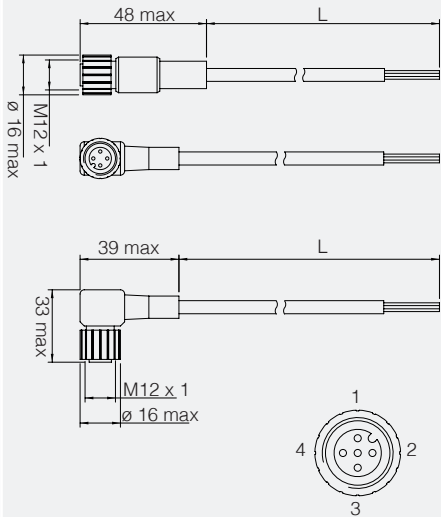
M8 PVC cCSAus																																							
product	dimensions (mm)	specifications																																					
 	 	<table border="1"> <thead> <tr> <th></th> <th>CD08/0A-****1US</th> <th>CD08/0B-****1US</th> </tr> </thead> <tbody> <tr> <td>Nominal voltage</td> <td>Max. 60 V ac/dc</td> <td>Max. 30 V ac/dc</td> </tr> <tr> <td>Nominal current</td> <td colspan="2">4 A</td> </tr> <tr> <td>Rated impulse voltage</td> <td colspan="2">1.5 kV</td> </tr> <tr> <td>Protection degree</td> <td colspan="2">IEC IP67</td> </tr> <tr> <td>Jacket material</td> <td colspan="2">PUR</td> </tr> <tr> <td>Wire isolation</td> <td colspan="2">PVC</td> </tr> <tr> <td>Conductors</td> <td>3</td> <td>4</td> </tr> <tr> <td>Conductors section</td> <td colspan="2">0.25 mm² (32 x 0.10 mm²)</td> </tr> <tr> <td>Outer diameter</td> <td colspan="2">Ø 4.4 mm ± 5%</td> </tr> <tr> <td>Tightening torque</td> <td colspan="2">0.4 Nm</td> </tr> <tr> <td>Working temperature</td> <td colspan="2">-5°C ÷ +70°C (for moved cable) -25°C ÷ +70°C (for permanently cable)</td> </tr> </tbody> </table>		CD08/0A-****1US	CD08/0B-****1US	Nominal voltage	Max. 60 V ac/dc	Max. 30 V ac/dc	Nominal current	4 A		Rated impulse voltage	1.5 kV		Protection degree	IEC IP67		Jacket material	PUR		Wire isolation	PVC		Conductors	3	4	Conductors section	0.25 mm ² (32 x 0.10 mm ²)		Outer diameter	Ø 4.4 mm ± 5%		Tightening torque	0.4 Nm		Working temperature	-5°C ÷ +70°C (for moved cable) -25°C ÷ +70°C (for permanently cable)		
			CD08/0A-****1US	CD08/0B-****1US																																			
Nominal voltage	Max. 60 V ac/dc	Max. 30 V ac/dc																																					
Nominal current	4 A																																						
Rated impulse voltage	1.5 kV																																						
Protection degree	IEC IP67																																						
Jacket material	PUR																																						
Wire isolation	PVC																																						
Conductors	3	4																																					
Conductors section	0.25 mm ² (32 x 0.10 mm ²)																																						
Outer diameter	Ø 4.4 mm ± 5%																																						
Tightening torque	0.4 Nm																																						
Working temperature	-5°C ÷ +70°C (for moved cable) -25°C ÷ +70°C (for permanently cable)																																						

M8 PUR cCSAus																																																																											
product	dimensions (mm)	specifications																																																																									
 		<table border="1"> <thead> <tr> <th></th> <th>CD08/0A-****5US</th> <th>CD08/0B-****5US</th> </tr> </thead> <tbody> <tr> <td>Nominal voltage</td> <td>Max. 60 V ac/dc</td> <td>Max. 30 V ac/dc</td> </tr> <tr> <td>Nominal current</td> <td colspan="2">4 A</td> </tr> <tr> <td>Rated impulse voltage</td> <td colspan="2">1.5 kV</td> </tr> <tr> <td>Protection degree</td> <td colspan="2">IEC IP67</td> </tr> <tr> <td>Jacket material</td> <td colspan="2">PUR</td> </tr> <tr> <td>Wire isolation</td> <td colspan="2">PP</td> </tr> <tr> <td>Conductors</td> <td>3</td> <td>4</td> </tr> <tr> <td>Conductors section</td> <td colspan="2">0.25 mm² (32 x 0.10 mm²)</td> </tr> <tr> <td>Outer diameter</td> <td colspan="2">Ø 4.1 mm ± 5%</td> </tr> <tr> <td>Tightening torque</td> <td colspan="2">0,4 Nm</td> </tr> <tr> <td>Working temperature</td> <td colspan="2">-25°C... +80°C (for moved cable) -25°C ... +80°C (for permanently cable)</td> </tr> </tbody> </table>		CD08/0A-****5US	CD08/0B-****5US	Nominal voltage	Max. 60 V ac/dc	Max. 30 V ac/dc	Nominal current	4 A		Rated impulse voltage	1.5 kV		Protection degree	IEC IP67		Jacket material	PUR		Wire isolation	PP		Conductors	3	4	Conductors section	0.25 mm ² (32 x 0.10 mm ²)		Outer diameter	Ø 4.1 mm ± 5%		Tightening torque	0,4 Nm		Working temperature	-25°C... +80°C (for moved cable) -25°C ... +80°C (for permanently cable)		<table border="1"> <thead> <tr> <th></th> <th>CD08/0A-****5US</th> <th>CD08/0B-****5US</th> </tr> </thead> <tbody> <tr> <td>Nominal voltage</td> <td>Max. 60 V ac/dc</td> <td>Max. 30 V ac/dc</td> </tr> <tr> <td>Nominal current</td> <td colspan="2">4 A</td> </tr> <tr> <td>Rated impulse voltage</td> <td colspan="2">1.5 kV</td> </tr> <tr> <td>Protection degree</td> <td colspan="2">IEC IP67</td> </tr> <tr> <td>Jacket material</td> <td colspan="2">PUR</td> </tr> <tr> <td>Wire isolation</td> <td colspan="2">PP</td> </tr> <tr> <td>Conductors</td> <td>3</td> <td>4</td> </tr> <tr> <td>Conductors section</td> <td colspan="2">0.25 mm² (32 x 0.10 mm²)</td> </tr> <tr> <td>Outer diameter</td> <td colspan="2">Ø 4.1 mm ± 5%</td> </tr> <tr> <td>Tightening torque</td> <td colspan="2">0,4 Nm</td> </tr> <tr> <td>Working temperature</td> <td colspan="2">-25°C... +80°C (for moved cable) -25°C ... +80°C (for permanently cable)</td> </tr> </tbody> </table>		CD08/0A-****5US	CD08/0B-****5US	Nominal voltage	Max. 60 V ac/dc	Max. 30 V ac/dc	Nominal current	4 A		Rated impulse voltage	1.5 kV		Protection degree	IEC IP67		Jacket material	PUR		Wire isolation	PP		Conductors	3	4	Conductors section	0.25 mm ² (32 x 0.10 mm ²)		Outer diameter	Ø 4.1 mm ± 5%		Tightening torque	0,4 Nm		Working temperature	-25°C... +80°C (for moved cable) -25°C ... +80°C (for permanently cable)	
			CD08/0A-****5US	CD08/0B-****5US																																																																							
Nominal voltage	Max. 60 V ac/dc	Max. 30 V ac/dc																																																																									
Nominal current	4 A																																																																										
Rated impulse voltage	1.5 kV																																																																										
Protection degree	IEC IP67																																																																										
Jacket material	PUR																																																																										
Wire isolation	PP																																																																										
Conductors	3	4																																																																									
Conductors section	0.25 mm ² (32 x 0.10 mm ²)																																																																										
Outer diameter	Ø 4.1 mm ± 5%																																																																										
Tightening torque	0,4 Nm																																																																										
Working temperature	-25°C... +80°C (for moved cable) -25°C ... +80°C (for permanently cable)																																																																										
	CD08/0A-****5US	CD08/0B-****5US																																																																									
Nominal voltage	Max. 60 V ac/dc	Max. 30 V ac/dc																																																																									
Nominal current	4 A																																																																										
Rated impulse voltage	1.5 kV																																																																										
Protection degree	IEC IP67																																																																										
Jacket material	PUR																																																																										
Wire isolation	PP																																																																										
Conductors	3	4																																																																									
Conductors section	0.25 mm ² (32 x 0.10 mm ²)																																																																										
Outer diameter	Ø 4.1 mm ± 5%																																																																										
Tightening torque	0,4 Nm																																																																										
Working temperature	-25°C... +80°C (for moved cable) -25°C ... +80°C (for permanently cable)																																																																										

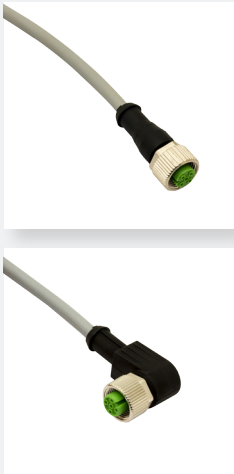
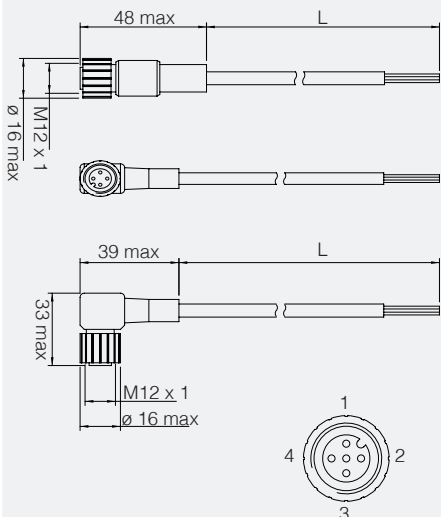
M12 PVC cCSAus																										
product	dimensions (mm)	specifications																								
 		<table border="1"> <thead> <tr> <th></th><th>CD12M/0B-****1US</th></tr> </thead> <tbody> <tr> <td>Nominal voltage</td><td>Max. 250 V ac/dc</td></tr> <tr> <td>Nominal current</td><td>4 A</td></tr> <tr> <td>Rated impulse voltage</td><td>2.5 kV</td></tr> <tr> <td>Protection degree</td><td>IEC IP67</td></tr> <tr> <td>Jacket material</td><td>PUR/PVC</td></tr> <tr> <td>Wire isolation</td><td>PVC</td></tr> <tr> <td>Conductors</td><td>4</td></tr> <tr> <td>Conductors section</td><td>0.25 mm² (32 x 0,10 mm²)</td></tr> <tr> <td>Outer diameter</td><td>Ø 5.2 mm ± 5%</td></tr> <tr> <td>Tightening torque</td><td>0,6 Nm</td></tr> <tr> <td>Working temperature</td><td>-5°C...+70°C (for moved cable) -25°C ... +70°C (for permanently cable)</td></tr> </tbody> </table>		CD12M/0B-****1US	Nominal voltage	Max. 250 V ac/dc	Nominal current	4 A	Rated impulse voltage	2.5 kV	Protection degree	IEC IP67	Jacket material	PUR/PVC	Wire isolation	PVC	Conductors	4	Conductors section	0.25 mm² (32 x 0,10 mm²)	Outer diameter	Ø 5.2 mm ± 5%	Tightening torque	0,6 Nm	Working temperature	-5°C...+70°C (for moved cable) -25°C ... +70°C (for permanently cable)
			CD12M/0B-****1US																							
Nominal voltage	Max. 250 V ac/dc																									
Nominal current	4 A																									
Rated impulse voltage	2.5 kV																									
Protection degree	IEC IP67																									
Jacket material	PUR/PVC																									
Wire isolation	PVC																									
Conductors	4																									
Conductors section	0.25 mm² (32 x 0,10 mm²)																									
Outer diameter	Ø 5.2 mm ± 5%																									
Tightening torque	0,6 Nm																									
Working temperature	-5°C...+70°C (for moved cable) -25°C ... +70°C (for permanently cable)																									



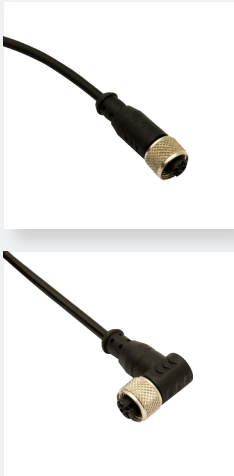
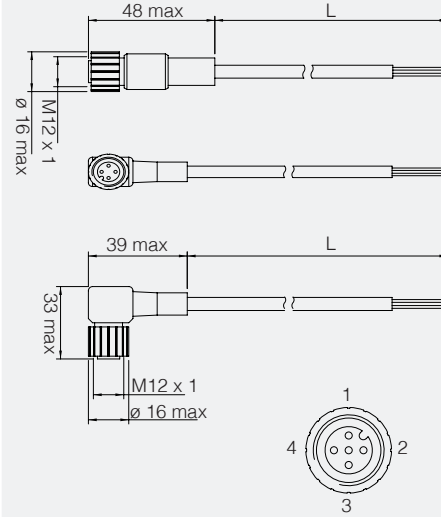
M12 PUR cCSAus

product	dimensions (mm)	specifications																								
		<table><tr><th></th><th>CD12M/0B-****5US</th></tr><tr><td>Nominal voltage</td><td>Max. 250 V ac/dc</td></tr><tr><td>Nominal current</td><td>4 A</td></tr><tr><td>Rated impulse voltage</td><td>2,5 kV</td></tr><tr><td>Protection degree</td><td>IEC IP67</td></tr><tr><td>Jacket material</td><td>PUR</td></tr><tr><td>Wire isolation</td><td>PP</td></tr><tr><td>Conductors</td><td>4</td></tr><tr><td>Conductors section</td><td>0.25 mm² (32 x 0.10 mm²)</td></tr><tr><td>Outer diameter</td><td>Ø 4.7 mm ± 5%</td></tr><tr><td>Tightening torque</td><td>0.6 Nm</td></tr><tr><td>Working temperature</td><td>-25°C...+80°C (for moved cable) -25°C...+80°C (for permanently cable)</td></tr></table>		CD12M/0B-****5US	Nominal voltage	Max. 250 V ac/dc	Nominal current	4 A	Rated impulse voltage	2,5 kV	Protection degree	IEC IP67	Jacket material	PUR	Wire isolation	PP	Conductors	4	Conductors section	0.25 mm² (32 x 0.10 mm²)	Outer diameter	Ø 4.7 mm ± 5%	Tightening torque	0.6 Nm	Working temperature	-25°C...+80°C (for moved cable) -25°C...+80°C (for permanently cable)
	CD12M/0B-****5US																									
Nominal voltage	Max. 250 V ac/dc																									
Nominal current	4 A																									
Rated impulse voltage	2,5 kV																									
Protection degree	IEC IP67																									
Jacket material	PUR																									
Wire isolation	PP																									
Conductors	4																									
Conductors section	0.25 mm² (32 x 0.10 mm²)																									
Outer diameter	Ø 4.7 mm ± 5%																									
Tightening torque	0.6 Nm																									
Working temperature	-25°C...+80°C (for moved cable) -25°C...+80°C (for permanently cable)																									

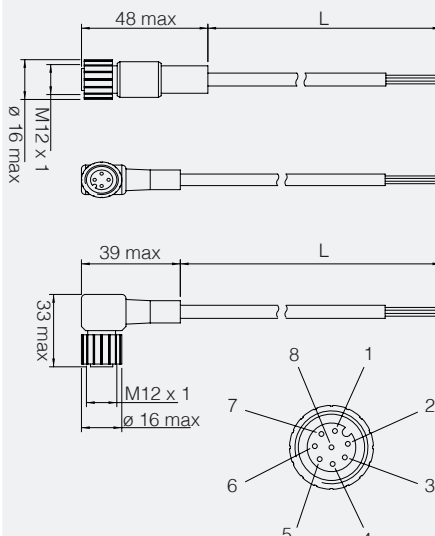
M12 PVC cCSAus

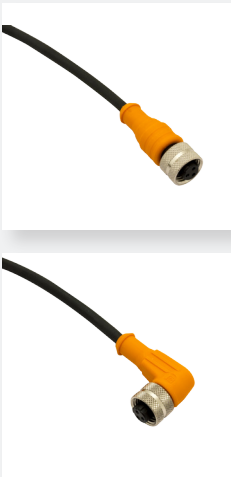
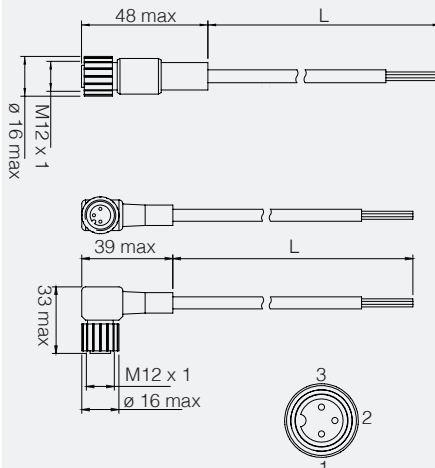
product	dimensions (mm)	specifications																								
		<table><tr><th></th><th>CD12M/0B-****1US</th></tr><tr><td>Nominal voltage</td><td>Max. 250 V ac/dc</td></tr><tr><td>Nominal current</td><td>4 A</td></tr><tr><td>Rated impulse voltage</td><td>2,5 kV</td></tr><tr><td>Protection degree</td><td>IEC IP67</td></tr><tr><td>Jacket material</td><td>PUR/PVC</td></tr><tr><td>Wire isolation</td><td>PVC</td></tr><tr><td>Conductors</td><td>4</td></tr><tr><td>Conductors section</td><td>0.25 mm² (32 x 0,10 mm²)</td></tr><tr><td>Outer diameter</td><td>Ø 5.2 mm ± 5%</td></tr><tr><td>Tightening torque</td><td>0.6 Nm</td></tr><tr><td>Working temperature</td><td>-5°C...+70°C (for moved cable) -25°C...+70°C (for permanently cable)</td></tr></table>		CD12M/0B-****1US	Nominal voltage	Max. 250 V ac/dc	Nominal current	4 A	Rated impulse voltage	2,5 kV	Protection degree	IEC IP67	Jacket material	PUR/PVC	Wire isolation	PVC	Conductors	4	Conductors section	0.25 mm² (32 x 0,10 mm²)	Outer diameter	Ø 5.2 mm ± 5%	Tightening torque	0.6 Nm	Working temperature	-5°C...+70°C (for moved cable) -25°C...+70°C (for permanently cable)
	CD12M/0B-****1US																									
Nominal voltage	Max. 250 V ac/dc																									
Nominal current	4 A																									
Rated impulse voltage	2,5 kV																									
Protection degree	IEC IP67																									
Jacket material	PUR/PVC																									
Wire isolation	PVC																									
Conductors	4																									
Conductors section	0.25 mm² (32 x 0,10 mm²)																									
Outer diameter	Ø 5.2 mm ± 5%																									
Tightening torque	0.6 Nm																									
Working temperature	-5°C...+70°C (for moved cable) -25°C...+70°C (for permanently cable)																									

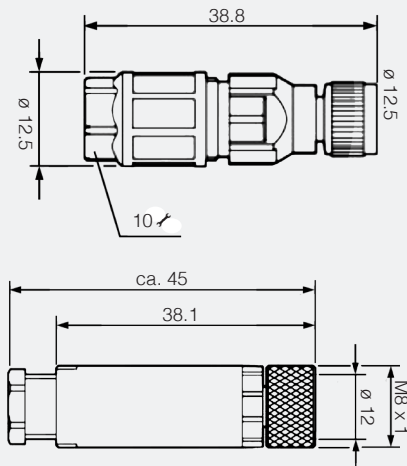
M12 extended temperature

product	dimensions (mm)	specifications	
			CD12M/0B-****1HT
		Nominal voltage	Max. 250 V ac/dc
		Nominal current	4 A
		Rated impulse voltage	2.5 kV
		Protection degree	IEC IP67
		Jacket material	PVC
		Wire isolation	PVC
		Conductors	4
		Conductors section	0.25 mm² (32 x 0.10 mm²)
		Outer diameter	Ø 4.5 mm ± 5%
		Tightening torque	0.6 Nm
		Working temperature	-25°C...+105°C (for permanently cable)

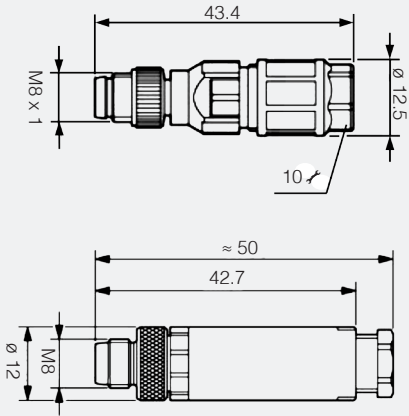


M12 8 wires																										
product	dimensions (mm)	specifications																								
																										
		<table><tr><th></th><th>CD12M/0X-***A5</th></tr><tr><td>Nominal voltage</td><td>Max. 30 V ac/dc</td></tr><tr><td>Nominal current</td><td>2 A</td></tr><tr><td>Rated impulse voltage</td><td>1,5 kV</td></tr><tr><td>Protection degree</td><td>IEC IP67</td></tr><tr><td>Jacket material</td><td>TPU</td></tr><tr><td>Wire isolation</td><td>PP</td></tr><tr><td>Conductors</td><td>8</td></tr><tr><td>Conductors section</td><td>0,34 mm² (42 x 0,10 mm²)</td></tr><tr><td>Outer diameter</td><td>Ø 6,4 mm ± 0,2mm</td></tr><tr><td>Tightening torque</td><td>0,6 Nm</td></tr><tr><td>Working temperature</td><td>-25°C...+80°C (for moved cable) -25°C...+80°C (for permanently cable)</td></tr></table>		CD12M/0X-***A5	Nominal voltage	Max. 30 V ac/dc	Nominal current	2 A	Rated impulse voltage	1,5 kV	Protection degree	IEC IP67	Jacket material	TPU	Wire isolation	PP	Conductors	8	Conductors section	0,34 mm² (42 x 0,10 mm²)	Outer diameter	Ø 6,4 mm ± 0,2mm	Tightening torque	0,6 Nm	Working temperature	-25°C...+80°C (for moved cable) -25°C...+80°C (for permanently cable)
	CD12M/0X-***A5																									
Nominal voltage	Max. 30 V ac/dc																									
Nominal current	2 A																									
Rated impulse voltage	1,5 kV																									
Protection degree	IEC IP67																									
Jacket material	TPU																									
Wire isolation	PP																									
Conductors	8																									
Conductors section	0,34 mm² (42 x 0,10 mm²)																									
Outer diameter	Ø 6,4 mm ± 0,2mm																									
Tightening torque	0,6 Nm																									
Working temperature	-25°C...+80°C (for moved cable) -25°C...+80°C (for permanently cable)																									

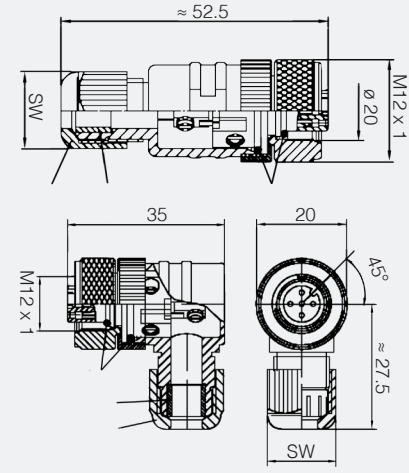
M12 AC																										
product	dimensions (mm)	specifications																								
		<table><thead><tr><th></th><th>CD12M/AC-****5</th></tr></thead><tbody><tr><td>Nominal voltage</td><td>Max. 250 V ac/dc</td></tr><tr><td>Nominal current</td><td>4 A</td></tr><tr><td>Rated impulse voltage</td><td>2 kV</td></tr><tr><td>Protection degree</td><td>IEC IP67</td></tr><tr><td>Jacket material</td><td>TPU</td></tr><tr><td>Wire isolation</td><td>PVC</td></tr><tr><td>Conductors</td><td>3</td></tr><tr><td>Conductors section</td><td>0.50 mm²</td></tr><tr><td>Outer diameter</td><td>Ø 4.6 mm ± 5%</td></tr><tr><td>Tightening torque</td><td>0.6 Nm</td></tr><tr><td>Working temperature</td><td>-10°C ...+80°C (for moved cable) -25°C...+80°C (for permanently cable)</td></tr></tbody></table>		CD12M/AC-****5	Nominal voltage	Max. 250 V ac/dc	Nominal current	4 A	Rated impulse voltage	2 kV	Protection degree	IEC IP67	Jacket material	TPU	Wire isolation	PVC	Conductors	3	Conductors section	0.50 mm²	Outer diameter	Ø 4.6 mm ± 5%	Tightening torque	0.6 Nm	Working temperature	-10°C ...+80°C (for moved cable) -25°C...+80°C (for permanently cable)
	CD12M/AC-****5																									
Nominal voltage	Max. 250 V ac/dc																									
Nominal current	4 A																									
Rated impulse voltage	2 kV																									
Protection degree	IEC IP67																									
Jacket material	TPU																									
Wire isolation	PVC																									
Conductors	3																									
Conductors section	0.50 mm²																									
Outer diameter	Ø 4.6 mm ± 5%																									
Tightening torque	0.6 Nm																									
Working temperature	-10°C ...+80°C (for moved cable) -25°C...+80°C (for permanently cable)																									

CL08				
product	dimensions (mm)	specifications		
				
		CL08/1*-00A	CL08/0*-00A	
		External diameter	2.5 mm...5 mm ±0.2 mm	3.5 mm ... 5 mm
		Stripping length of the sheath	40 mm	12 mm
		Ambient temperature	-25 °C ... 80 °C	-40 °C ... 85 °C
		Degree of protection	IP65 / IP67	IP67
		Rated current at 40°C	a 40°C 4 A	a 40°C 4 A
		Rated voltage	60 V (3 wires) 30 V (4 wires)	60 V (3 wires) 30 V (4 wires)
		Contact resistance	≤ 5 mΩ	≤ 5 mΩ
		Insulation resistance	≥ 100 MΩ	≥ 100 MΩ
		Conductor cross section	0.25 mm²...0.5 mm²	0.14 mm²...0.5 mm²
		AWG conductor cross section	AWG 24 ... 20	-
		Wire diameter including insulation	0.75 mm ... 1.5 mm ±0.05 mm	26 ... 20 mm
		Torque	0.6 Nm (pressure nut) 0.2 Nm (M8 nut)	0.2 Nm (M8 nut)

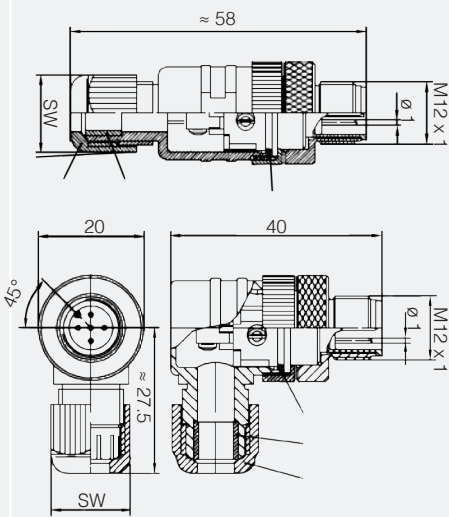
CV 08

product	dimensions (mm)	specifications	
			

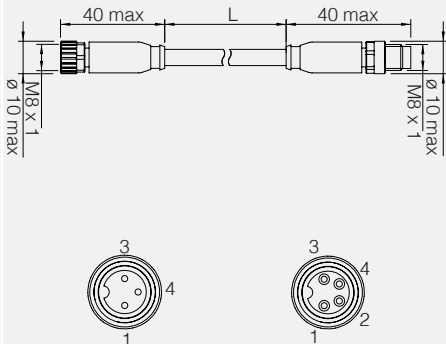
CL 12

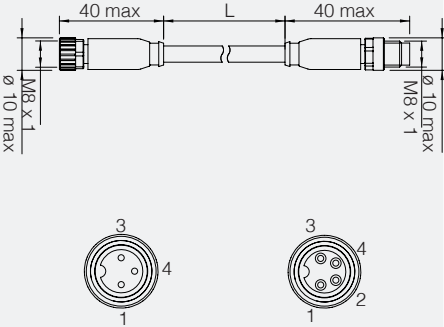
product	dimensions (mm)	specifications	
 			

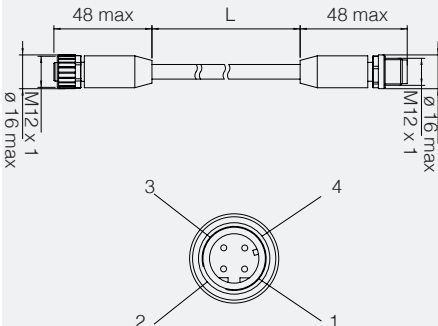
CV 12

product	dimensions (mm)	specifications	
 			



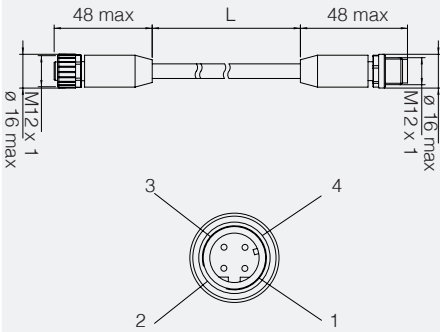
CDP 08 PVC																																						
product	dimensions (mm)	specifications																																				
		<table><tr><th></th><th>CDP08/0A</th><th>CDP08/0B</th></tr><tr><td>Nominal voltage</td><td>Max. 60 V ac/dc</td><td>Max. 30 V ac/dc</td></tr><tr><td>Nominal current</td><td colspan="2">4 A</td></tr><tr><td>Rated impulse voltage</td><td colspan="2">0.8 kV</td></tr><tr><td>Protection degree</td><td colspan="2">IEC IP67</td></tr><tr><td>Jacket material</td><td>PVC IEC 332-1</td><td>PVC CEI 2022 II OR</td></tr><tr><td>Wire isolation</td><td colspan="2">PVC</td></tr><tr><td>Conductors</td><td>3</td><td>4</td></tr><tr><td>Conductors section</td><td colspan="2">0.25 mm² (32 x 0.10 mm²)</td></tr><tr><td>Outer diameter</td><td colspan="2">Ø 4.5 mm ± 5%</td></tr><tr><td>Tightening torque</td><td colspan="2">0.4 Nm</td></tr><tr><td>Working temperature</td><td colspan="2">-10°C ÷ +80°C (for moved cable) -25°C ÷ +80°C (for permanently cable)</td></tr></table>		CDP08/0A	CDP08/0B	Nominal voltage	Max. 60 V ac/dc	Max. 30 V ac/dc	Nominal current	4 A		Rated impulse voltage	0.8 kV		Protection degree	IEC IP67		Jacket material	PVC IEC 332-1	PVC CEI 2022 II OR	Wire isolation	PVC		Conductors	3	4	Conductors section	0.25 mm² (32 x 0.10 mm²)		Outer diameter	Ø 4.5 mm ± 5%		Tightening torque	0.4 Nm		Working temperature	-10°C ÷ +80°C (for moved cable) -25°C ÷ +80°C (for permanently cable)	
			CDP08/0A	CDP08/0B																																		
Nominal voltage	Max. 60 V ac/dc	Max. 30 V ac/dc																																				
Nominal current	4 A																																					
Rated impulse voltage	0.8 kV																																					
Protection degree	IEC IP67																																					
Jacket material	PVC IEC 332-1	PVC CEI 2022 II OR																																				
Wire isolation	PVC																																					
Conductors	3	4																																				
Conductors section	0.25 mm² (32 x 0.10 mm²)																																					
Outer diameter	Ø 4.5 mm ± 5%																																					
Tightening torque	0.4 Nm																																					
Working temperature	-10°C ÷ +80°C (for moved cable) -25°C ÷ +80°C (for permanently cable)																																					

CDP 08 PUR				
product	dimensions (mm)	specifications		
		CDP08/0A-***AA8F	CDP08/0B-***AA8F	
		Nominal voltage	Max. 60 V ac/dc	Max. 30 V ac/dc
		Nominal current	4 A	
		Rated impulse voltage	1.5 kV	
		Protection degree	IEC IP67	
		Jacket material	PUR	PVC CEI 2022 II OR
		Wire isolation	PVC	
		Conductors	3	4
		Conductors section	0.25 mm² (32 x 0.10 mm²)	0.25 mm² (32 x 0.10 mm²)
		Outer diameter	Ø 3.75 mm ± 0,2 mm	Ø 4.7 mm ± 0,2 mm
		Tightening torque	0.6 Nm	
		Working temperature	-5°C...+80°C (for moved cable) -20°C ÷ +80°C (for permanently cable)	-5°C ÷ +80°C (for moved cable) -30°C ÷ +70°C (for permanently cable)

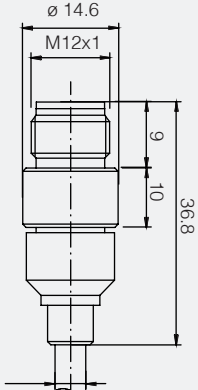
CDP 12 PVC																																						
product	dimensions (mm)	specifications																																				
		<table><tr><th></th><th colspan="2">CDP12/0B-***AA</th></tr><tr><td>Nominal voltage</td><td>Max. 250 V ac/dc</td><td>Max. 30 V ac/dc</td></tr><tr><td>Nominal current</td><td colspan="2">4 A</td></tr><tr><td>Rated impulse voltage</td><td colspan="2">2.5 kV</td></tr><tr><td>Protection degree</td><td colspan="2">IEC IP67</td></tr><tr><td>Jacket material</td><td colspan="2">PVC CEI 2022 II OR</td></tr><tr><td>Wire isolation</td><td colspan="2">PVC</td></tr><tr><td>Conductors</td><td colspan="2">4</td></tr><tr><td>Conductors section</td><td colspan="2">0.25 mm² (32 x 0.10 mm²)</td></tr><tr><td>Outer diameter</td><td colspan="2">Ø 4.5mm ± 5%</td></tr><tr><td>Tightening torque</td><td colspan="2">0.6 Nm</td></tr><tr><td>Working temperature</td><td colspan="2">-10°C ÷ +80°C (for moved cable) -25°C ÷ +80°C (for permanently cable)</td></tr></table>		CDP12/0B-***AA		Nominal voltage	Max. 250 V ac/dc	Max. 30 V ac/dc	Nominal current	4 A		Rated impulse voltage	2.5 kV		Protection degree	IEC IP67		Jacket material	PVC CEI 2022 II OR		Wire isolation	PVC		Conductors	4		Conductors section	0.25 mm² (32 x 0.10 mm²)		Outer diameter	Ø 4.5mm ± 5%		Tightening torque	0.6 Nm		Working temperature	-10°C ÷ +80°C (for moved cable) -25°C ÷ +80°C (for permanently cable)	
			CDP12/0B-***AA																																			
Nominal voltage	Max. 250 V ac/dc	Max. 30 V ac/dc																																				
Nominal current	4 A																																					
Rated impulse voltage	2.5 kV																																					
Protection degree	IEC IP67																																					
Jacket material	PVC CEI 2022 II OR																																					
Wire isolation	PVC																																					
Conductors	4																																					
Conductors section	0.25 mm² (32 x 0.10 mm²)																																					
Outer diameter	Ø 4.5mm ± 5%																																					
Tightening torque	0.6 Nm																																					
Working temperature	-10°C ÷ +80°C (for moved cable) -25°C ÷ +80°C (for permanently cable)																																					



CDP 12 PUR

product	dimensions (mm)	specifications	
		CDP12/0B	
		Nominal voltage	Max. 250 V ac/dc
		Nominal current	4 A
		Rated impulse voltage	2,5 kV
		Protection degree	IEC IP67
		Jacket material	PUR
		Wire isolation	PVC
		Conductors	4
		Conductors section	0,25 mm ² (32 x 0,10 mm ²)
		Outer diameter	Ø 4.7 mm ± 5%
		Tightening torque	0,6 Nm
		Working temperature	-5°C ÷ +80°C (for moved cable) -20°C ÷ +80°C (for permanently cable)

CDV

product	dimensions (mm)	specifications				
			CDV-37	CDV-47	CDV-50	CDV-55
		Hole diameter	3,75 mm	4,7 mm	5 mm	5,5 mm
		Connections	to solder			
		Nominal voltage	60 Vdc - 48 Vac			
		Nominal current	4 A			
		Protection degree	IEC IP65			
		Housing material	nickel-plated brass			
		Plug connector material	polyammide 66 GV, V0 UL94			
		Contacts material	nickel-plated brass with surface gold-plating			
		O-Ring material	NBR 72			