



CE series


Ø 20 mm cylindrical
capacitive sensors



Ø 20 mm cylindrical

features

- Models with or without self-monitoring
- Sensitivity adjustment with trimmer
- NO+NC complementary output
- Stainless steel housing
- IP65 protection degree
- Complete protection against electrical damages
- Axial cable exit or M12 plastic plug cable exit

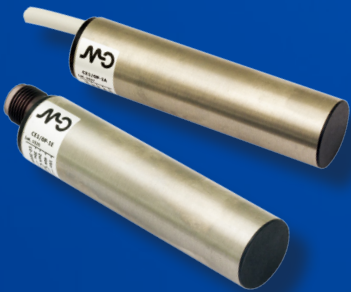

web contents



- Application notes
- Photos
- Catalogue / Manuals



code description

	CE	1	/	0	P	-	1	A
series	CE	Capacitive proximity sensor						
housing	1	Standard						
	2	With self-monitoring						
output state	0	NO+NC complementary output						
output logic	P	PNP logic output						
distance	1	Standard shielded 10 mm						
connect.	A	Axial cable exit						
	E	M12 plug cable exit						

available models

diameter	installation	distance (mm)	plug	self-monitoring	PNP/NO + NC
Ø 20	shielded	10	cable	-	CE1/0P-1A
			M12		CE1/0P-1E
			cable	•	CE2/0P-1A
			M12		CE2/0P-1E




Ø 20 mm cylindrical

technical specification

	CE1/0P-1*	CE2/0P-1*
		
nominal sensing distance Sn	10 mm	
operating distance	1.5...7.2 mm (shielded)	
hysteresis	2...15%	
repeatability	5%	
supply voltage	10...30 Vdc	
ripple	≤ 15%	
no-load supply current	17 mA	
load current	≤ 100 mA	
leakage current	≤ 1 µA	
voltage drop	1.5V max. IL=100 mA	
output type	PNP NO+NC - open collector	
switching frequency	300 Hz	
self-monitoring pulse frequency	period 4-8 ms (6,2 ms nominal) duration 150-300 µs (220 µs nominal)	
power supply protections	polarity reversal, transient	
output protection	short circuit (autoreset)	
temperature range	-25°...+70°C	
temperature drift	20% Sr	
EMC	in conformity with the EMC Directive, according to IEC 60947-5-2	
shocks and vibrations	IEC 60947-5-2	
protection degree	IP 65	
LEDs	yellow (NO output energized)	
housing material	stainless steel	
active head material	LCP	
weight	80 g M12 connector / 200 g cable	

electrical diagrams of connections

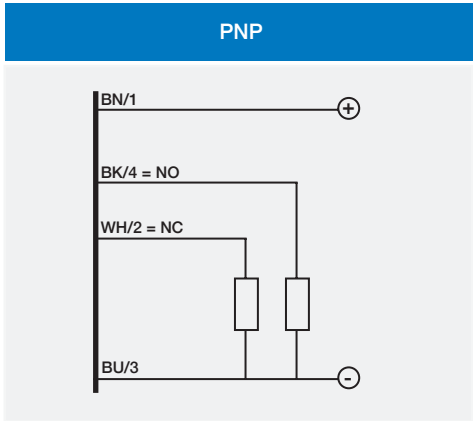


- BN brown
- BU blue
- BK black
- WH white




Ø 20 mm cylindrical


M12 - NO+NC



response diagram

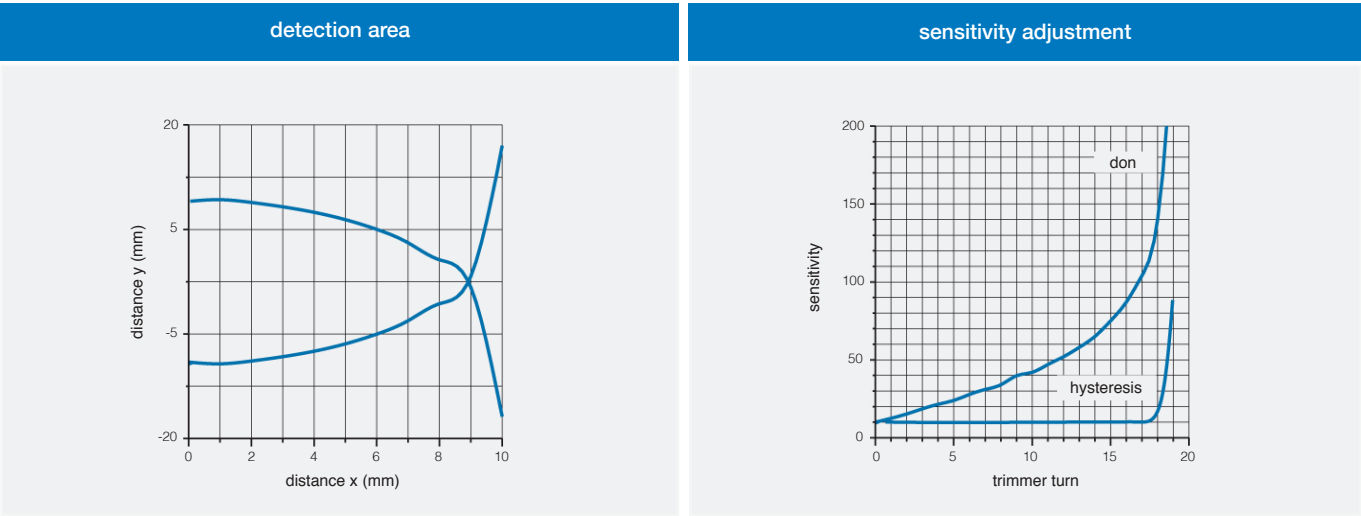

dimensions (mm)

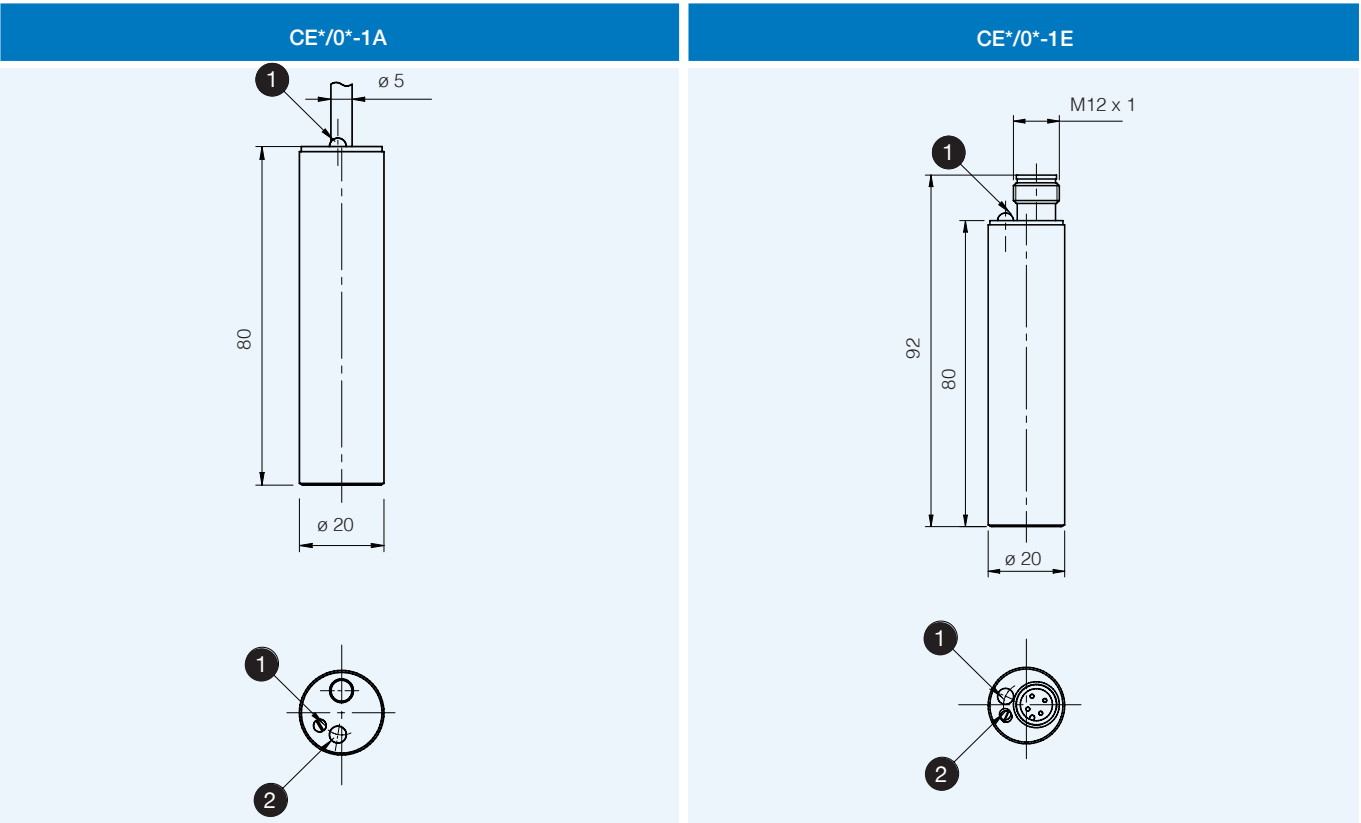

1 LED 2 TRIMMER