



FX series

Photoelectric sensors
for DIN-rail mounting



Photoelectric sensors
for DIN-rail mounting

features

- Fibre-optic amplifier for DIN-rail mounting (DIN/EN 50022)
- Distance setting by means of teach in with additional manual fine adjustment (FX4)
- Distance setting by means of 12-turn potentiometer with illuminated scale (FX3)
- Adjustable pulse delay and stretching (FX4)
- High switching frequency: 1,5 kHz
- Ideal for stacking, thanks to 10 mm housing width
- Teach 1 (background), Teach 2 (target and background) (FX4)
- Large setting range of 20...200 mm

web contents

- Application notes
- Photos
- Catalogue / Manuals



code description

			FX	3	/	0	P	-	0	A
series			FX	Fibre-optic amplifier						
distance setting			3	Distance setting by means of potentiometer						
			4	Distance setting by means of teach in buttons						
LO / DO			0	LO/DO function selectable						
PNP / NPN output			P	PNP output						
			N	NPN output						
housing			0	Plastic housing						
cable / plug output			A	Cable output 2 m						
			F	4 pin M8 connector						

available models

dimensions (mm)	series	DIN rail	radjustment	exit	PNP	NPN
					NO / NC	NO / NC
10 x 31 x 60	FX3	●	trimmer	cable	FX3/0P-0A	FX3/0N-0A
				M8	FX3/0P-0F	FX3/0N-0F
	FX4		Teach-In	cable	FX4/0P-0A	FX4/0N-0A
				M8	FX4/0P-0F	FX4/0N-0F




	FX4/0*-0*	FX3/0*-0*
		
nominal sensing distance	see optical fibres table	
setting range	20...200 mm	
teach increment	≤ 1 mm	-
hysteresis	10 % typ.	
standard target	100 x 100 mm white	
emitter (regulated light power)	red (660 nm)	
output (switchable)	NO / NC	
excess light output	-	light ON
output state indication	LEDs; bar graph	LED yellow
excess light indicator	LED green	
supply voltage range	10 ... 30 Vdc	
max. ripple content	≤ 20% V al / UB	
output current	≤ 200 mA	
output voltage drop	≤ 2.0 V a / at 200 mA	
no-load supply current	μ25 mA typ. a / at UB = 24 V	≤ 15 mA typ. a / at UB = 24 V
leakage current	≤ 0.1 mA	
switching frequency	≤ 1,500 Hz	
switching time	≤ 330 μsec	
modulation frequency	15 kHz	
power on delay	80 ms	300 ms
max. ambient light, halogen	5,000 Lux	
max. ambient light, sun	10,000 Lux	
sensitivity setting	Teach-In	Potentiometer
pulse delay/stretching	10 ... 150 msec	-
ambient temperature range	-25 ... +55 °C	
temperature drift of sn	0.2 % / °C	
voltage reversal protection	built-in	
induction protection		
short-circuit protection		
shocks and vibration	IEC 60947-5-2 / 7.4	
cable length	300 m max.	
weight	17 g connector / 68 g cable	18 g connector/ 69 g cable
protection degree	IP64 (EN60529) ⁽¹⁾	
EMC	in conformity with the EMC Directive according to EN 60947-5-2	
optical fibre connection	Ø 2,2 mm	
housing material	PBTP	
connection cable (FX*/0*-0A)	PVC 4 x 0,25 mm² / 128 x 0,05 mm Ø	
connector type (FX*/0*-0F)	M8 4 wires	


⁽¹⁾ Protection guaranteed only with plug cable well mounted



electrical diagrams of the connections

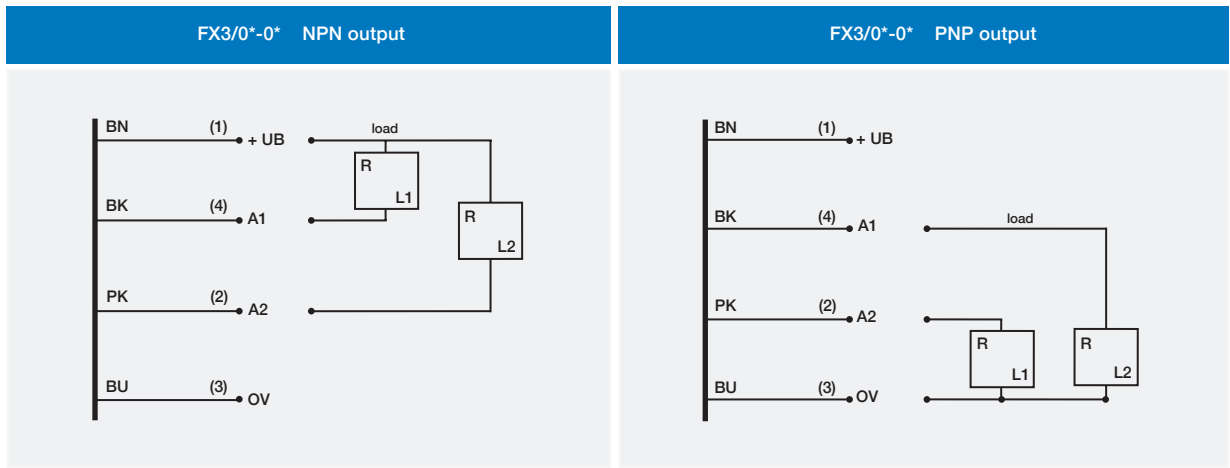


A1 Output (Light-ON/Dark-ON switchable)
A2 Excess light output Light-ON

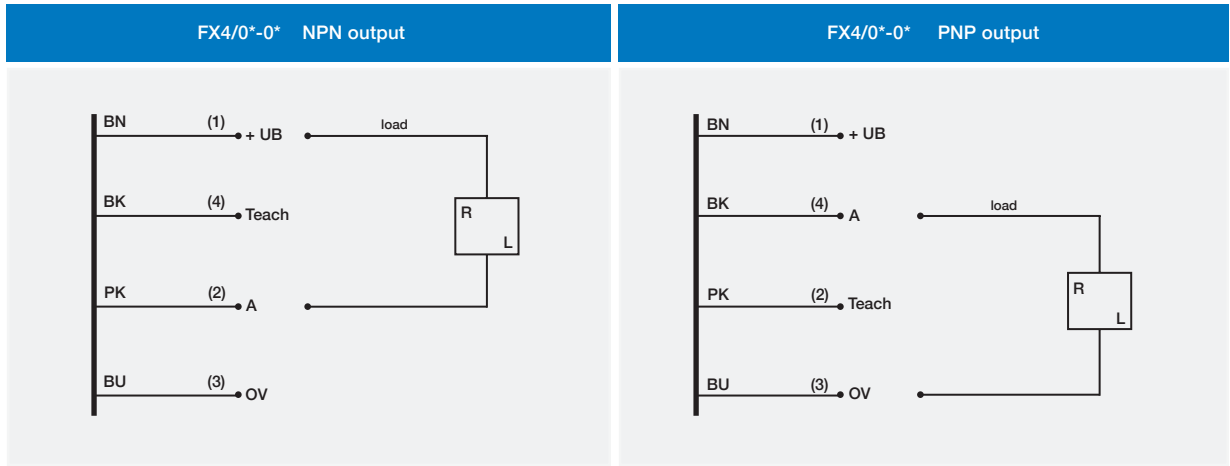


- BN brown
- BU blue
- BK black
- WH white
- PK pink
- GY gray

plug

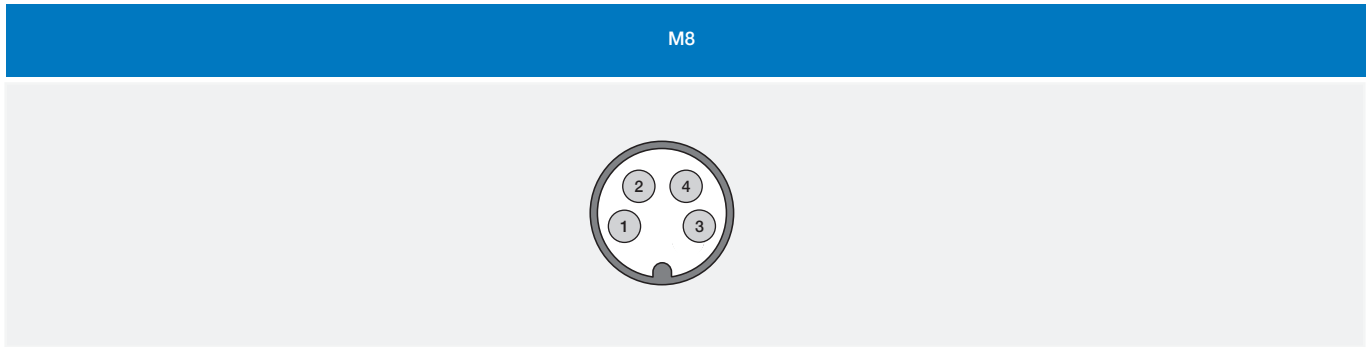





FX3/0*-0A

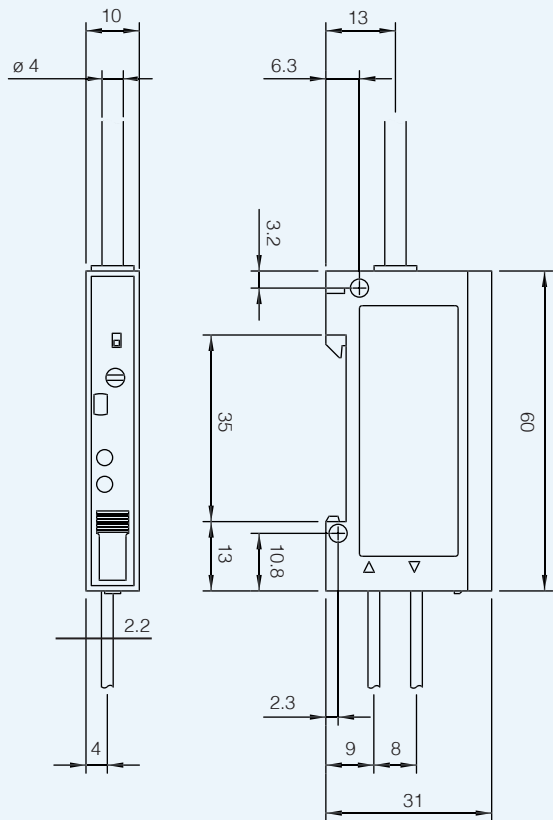

FX3/0*-0F

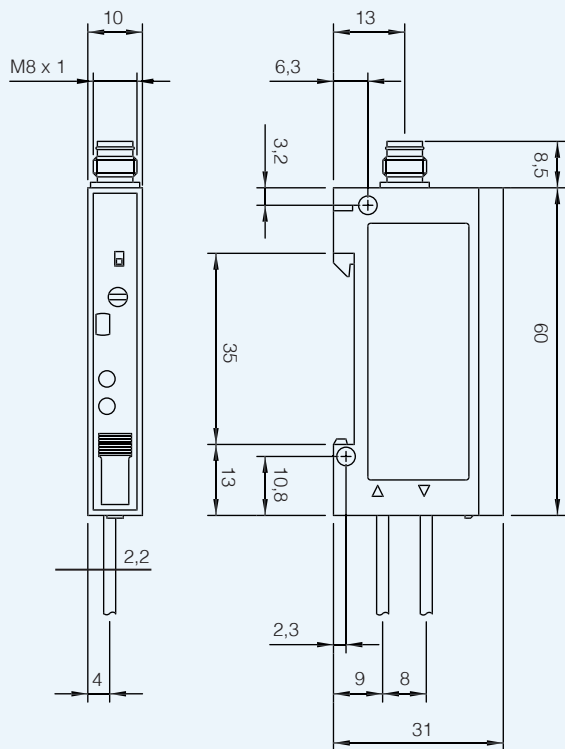

FX4/0*-0A

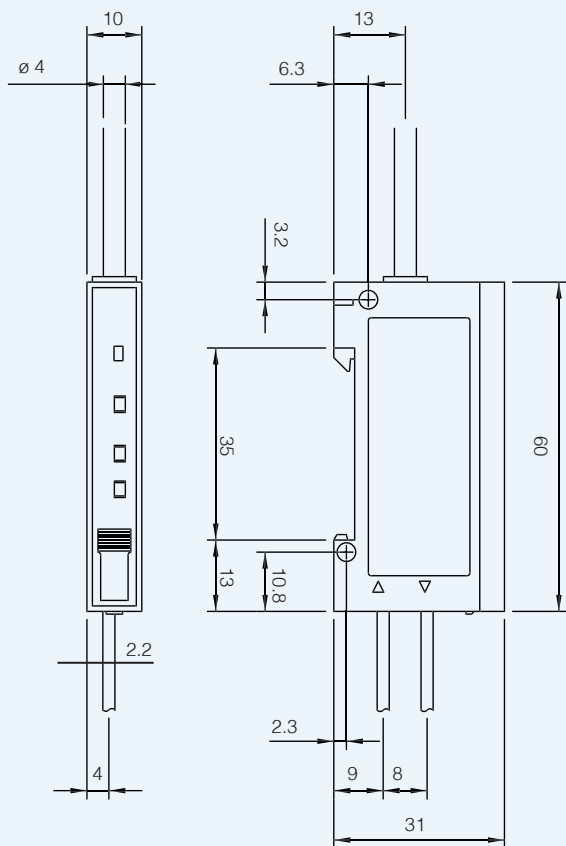

FX4/0*-0F

