




Operating Manual

mic+ Ultrasonic Sensors with one switching output an IO-Link

mic+25/F/TC
mic+35/F/TC
mic+130/F/TC
mic+340/F/TC
mic+600/F/TC



Diagram 1: Set sensor parameters numerically using LED display

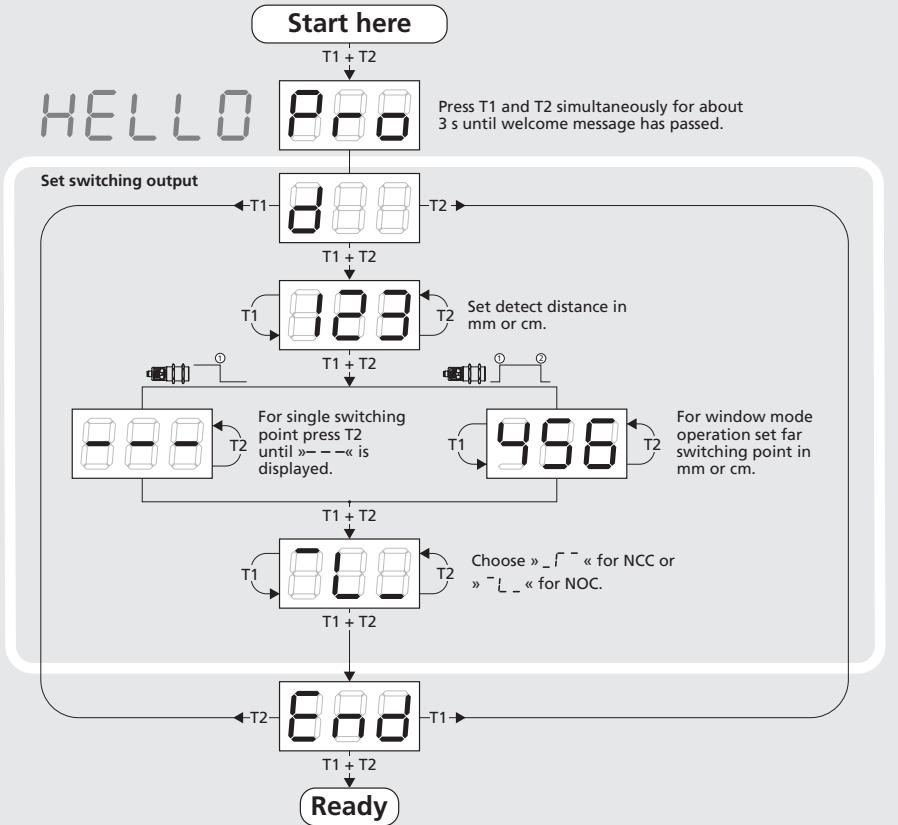

Product description

- The mic+ sensor with one switching output measures the distance to an object within the detection zone contactless. Depending on the adjusted detect distance the switching output is set.
- All settings are done with two push-buttons and a three-digit LED-display (TouchControl).
- Three-colour LEDs indicate the switching status.
- The output functions are changeable from NOC to NCC.
- The sensors are adjustable manually via TouchControl or via Teach-in procedure.
- Useful additional functions are set in the Add-on-menu.
- Using the LinkControl adapter (optional accessory) all TouchControl and additional sensor parameter

settings can be adjusted by a Windows® Software.

IO-Link

The mic+ sensors are IO-Link-capable in accordance with IO-Link specification V1.1 and support Smart Sensor Profile like Digital Measuring Sensor.

The mic+ sensors have a blind zone in which distance measurement is not possible. The operating range indicates the distance of the sensor that can be applied with normal reflectors with sufficient function reserve. When using good reflectors, such as a calm water surface, the sensor can also be used up to its maximum range. Objects that strongly absorb (e.g. plastic foam) or diffusely reflect sound (e.g. pebble stones) can also reduce the defined operating range.

Safety Notes

- Read the operating instructions prior to start-up.
- Connection, installation and adjustment works may only be carried out by expert personnel.
- No safety component in accordance with the EU Machine Directive, use in the area of personal and machine protection not permitted

Proper Use

mic+ ultrasonic sensors are used for non-contact detection of objects.

Synchronisation

If the assembly distances shown in Fig. 1 for two or more sensors are exceeded the integrated synchronisation should be used. Connect Sync/Com-channels (pin 5 at the units receptive) of all sensors (10 maximum).

Installation

- Assemble the sensor at the installation location.
- Plug in the connector cable to the M12 connector, see Fig. 2.




Fig. 2: Pin assignment with view onto sensor plug and colour coding of the microsonic connection cable

Start-up

- Connect the power supply.
- Set the parameters of the sensor manually via TouchControl (see Fig. 3 and Diagram 1)
- or use the Teach-in procedure to adjust the detect points (see Diagram 2).




Fig. 3:

TouchControl/LED display

Factory setting

mic+ sensors are delivered factory made with the following settings:

- Switching output on NOC
- Detecting distance at operating range
- Measurement range set to maximum range

Maintenance

mic+ sensors work maintenance free. Small amounts of dirt on the surface do not influence function. Thick layers of dirt and caked-on dirt affect sensor function and therefore must be removed.

Notes

- mic+ sensors have internal temperature compensation. Because the sensors heat up on their own, the temperature compensation reaches its optimum working point after approx. 30 minutes of operation.

- During normal operating mode, a yellow LED D2 signals that the switching output has connected.

- During normal operating mode, the measured distance value is displayed on the LED-indicator in mm (up to 999 mm) or cm (from 100 cm). Scale switches automatically and is indicated by a point on top of the digits.

- During Teach-in mode, the hysteresis loops are set back to factory settings.

- If no objects are placed within the detection zone the LED-indicator shows >--<.

- If no push-buttons are pressed for 20 seconds during parameter setting mode the made changes are stored and the sensor returns to normal operating mode.

- The sensor can be reset to its factory setting, see »Key lock and factory setting«, Diagram 3.

- The latest IODD file and informations about start-up and configuration of pico+ sensors with IO-Link, you will find online at www.microsonic.de/en/mic+.

Show parameters

- In normal operating mode shortly push T1. The LED display shows »PAr.«

Each time you tap push-button T1 the actual settings of the analogue output are shown.

Diagram 2: Set sensor parameters via Teach-in procedure

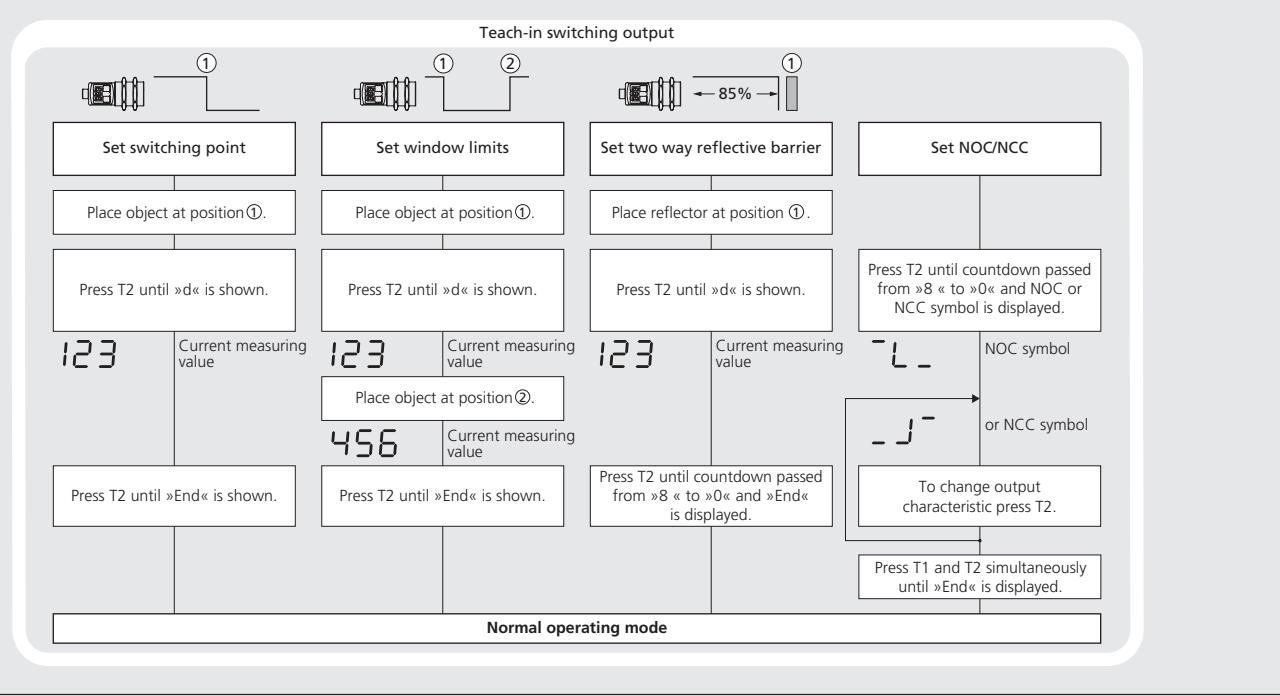


Diagram 3: Key lock and factory setting




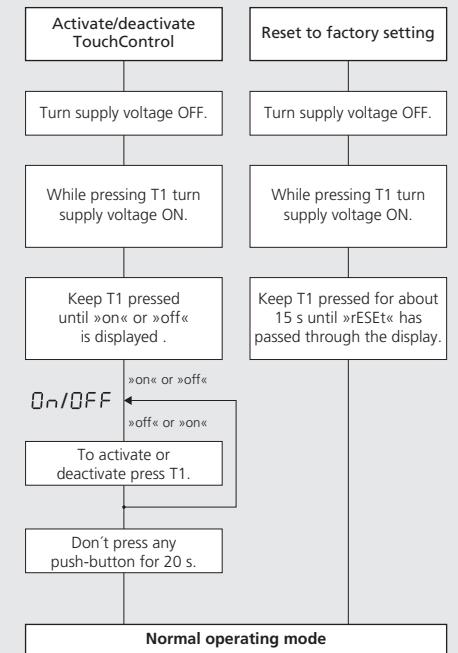


Diagram 4: Useful additional functions in Add-on menu (for experienced users only, settings not required for standard applications)

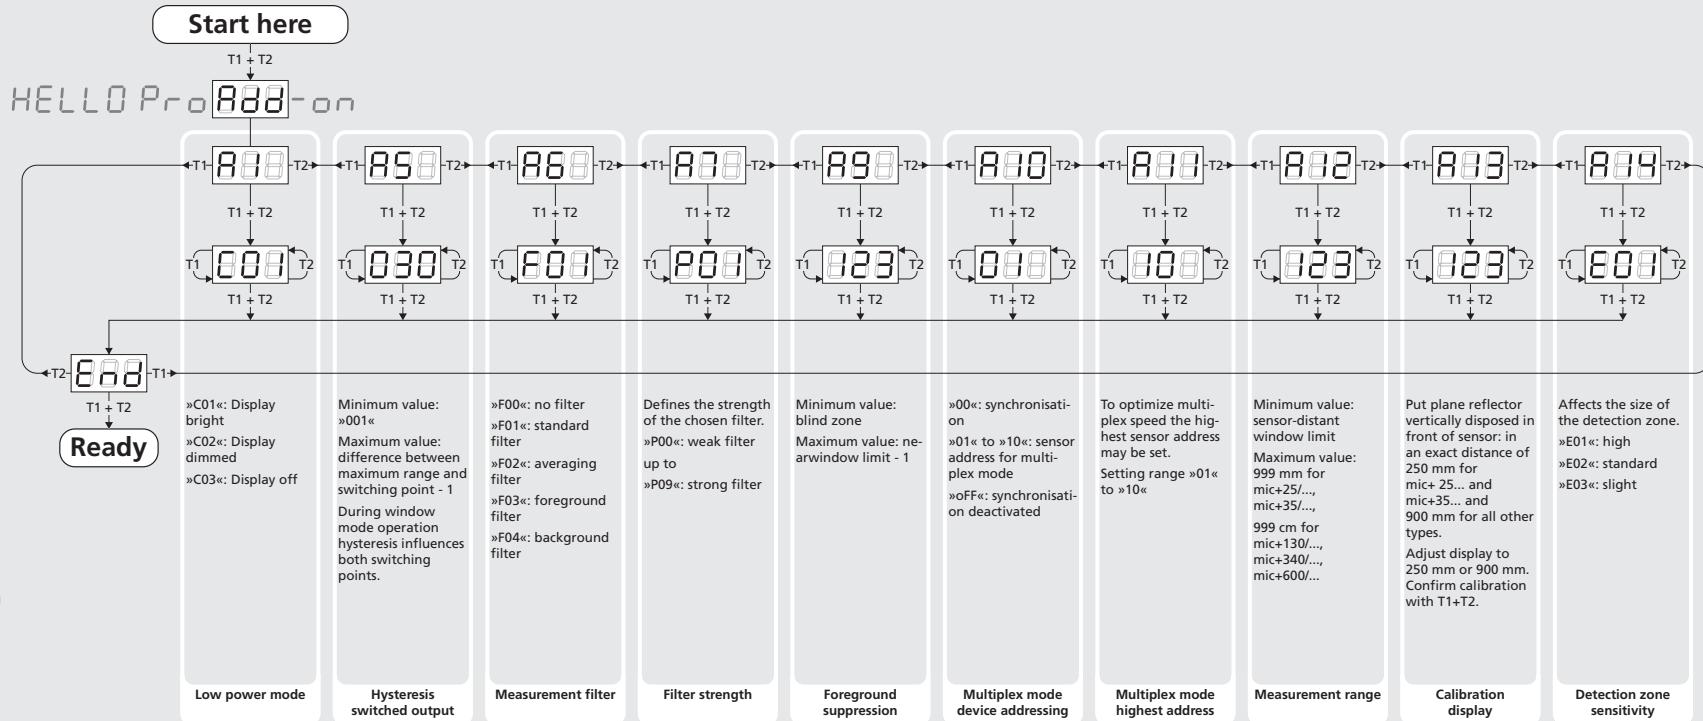






Technical data



blind zone	0 to 30 mm
operating range	250 mm
maximum range	350 mm
angle of beam spread	see detection zone
transducer frequency	320 kHz
resolution	0.025 mm

detection zones

for different objects:
The dark grey areas represent the zone where it is easy to recognise the normal reflector (round bar). This indicates the typical operating range of the sensors. The light grey areas represent the zone where a very large reflector – for instance a plate – can still be recognised. The requirement here is for an optimum alignment to the sensor. It is not possible to evaluate ultrasonic reflections outside this area.

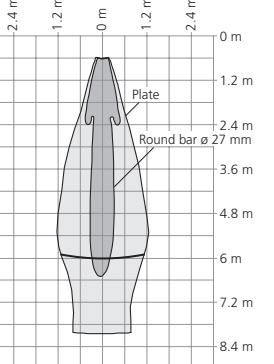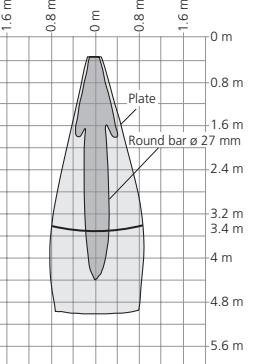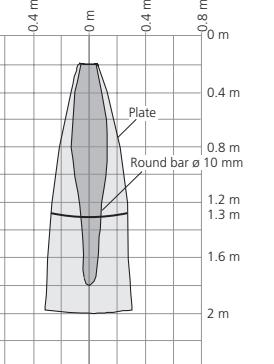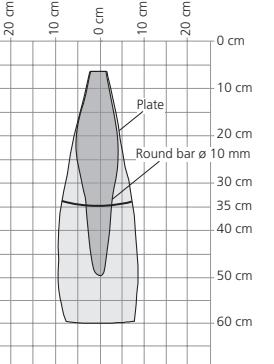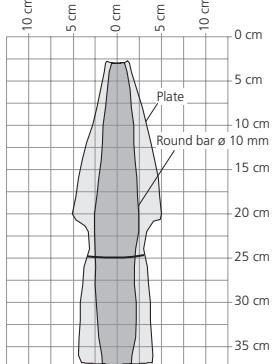

reproducibility	±0.15 %
accuracy	±1 % (Temperature drift internal compensated, may be deactivated ³⁾ , 0.17%/K without compensation)

reproducibility	±0.15 %
accuracy	±1 % (Temperature drift internal compensated, may be deactivated ³⁾ , 0.17%/K without compensation)

reproducibility	±0.15 %
accuracy	±1 % (Temperature drift internal compensated, may be deactivated ³⁾ , 0.17%/K without compensation)

reproducibility	±0.15 %
accuracy	±1 % (Temperature drift internal compensated, may be deactivated ³⁾ , 0.17%/K without compensation)

reproducibility	±0.15 %
accuracy	±1 % (Temperature drift internal compensated, may be deactivated ³⁾ , 0.17%/K without compensation)

operating voltage U_B	9 to 30 V DC, short-circuit-proof, Class 2
voltage ripple	±10 %

operating voltage U_B	9 to 30 V DC, short-circuit-proof, Class 2
voltage ripple	±10 %

operating voltage U_B	9 to 30 V DC, short-circuit-proof, Class 2
voltage ripple	±10 %

operating voltage U_B	9 to 30 V DC, short-circuit-proof, Class 2
voltage ripple	±10 %

operating voltage U_B	9 to 30 V DC, short-circuit-proof, Class 2
voltage ripple	±10 %

no-load supply current	≤ 80 mA
housing	Brass sleeve, nickel-plated, plastic parts: PBT, TPU; Ultrasonic transducer: polyurethane foam, epoxy resin with glass content

no-load supply current	≤ 80 mA
housing	Brass sleeve, nickel-plated, plastic parts: PBT, TPU; Ultrasonic transducer: polyurethane foam, epoxy resin with glass content

no-load supply current	≤ 80 mA
housing	Brass sleeve, nickel-plated, plastic parts: PBT, TPU; Ultrasonic transducer: polyurethane foam, epoxy resin with glass content

no-load supply current	≤ 80 mA
housing	Brass sleeve, nickel-plated, plastic parts: PBT, TPU; Ultrasonic transducer: polyurethane foam, epoxy resin with glass content

no-load supply current	≤ 80 mA
housing	Brass sleeve, nickel-plated, plastic parts: PBT, TPU; Ultrasonic transducer: polyurethane foam, epoxy resin with glass content

no-load supply current	≤ 80 mA
housing	Brass sleeve, nickel-plated, plastic parts: PBT, TPU; Ultrasonic transducer: polyurethane foam, epoxy resin with glass content

class of protection to EN 60529	IP 67
norm conformity	EN 60947-5-2

class of protection to EN 60529	IP 67
norm conformity	EN 60947-5-2

class of protection to EN 60529	IP 67
norm conformity	EN 60947-5-2

class of protection to EN 60529	IP 67
norm conformity	EN 60947-5-2

class of protection to EN 60529	IP 67
norm conformity	EN 60947-5-2

class of protection to EN 60529	IP 67
norm conformity	EN 60947-5-2

type of connection	5-pin initiator plug, PBT
controls	2 push-buttons (TouchControl)

type of connection	5-pin initiator plug, PBT
controls	2 push-buttons (TouchControl)

type of connection	5-pin initiator plug, PBT
controls	2 push-buttons (TouchControl)

type of connection	5-pin initiator plug, PBT
controls	2 push-buttons (TouchControl)

type of connection	5-pin initiator plug, PBT
controls	2 push-buttons (TouchControl)

type of connection	5-pin initiator plug, PBT
controls	2 push-buttons (TouchControl)

indicators	3-digit LED display, 2 three-colour LEDs with TouchControl and LinkControl
programmable	

indicators	3-digit LED display, 2 three-colour LEDs with TouchControl and LinkControl
programmable	

indicators	3-digit LED display, 2 three-colour LEDs with TouchControl and LinkControl
programmable	

indicators	3-digit LED display, 2 three-colour LEDs with TouchControl and LinkControl
programmable	

indicators	3-digit LED display, 2 three-colour LEDs with TouchControl and LinkControl
programmable	

indicators	3-digit LED display, 2 three-colour LEDs with TouchControl and LinkControl
programmable	

operating temperature	-25 to +70 °C
storage temperature	-40 to +85 °C

operating temperature	-25 to +70 °C
storage temperature	-40 to +85 °C

operating temperature	-25 to +70 °C
storage temperature	-40 to +85 °C

operating temperature	-25 to +70 °C
storage temperature	-40 to +85 °C

operating temperature	-25 to +70 °C
storage temperature	-40 to +85 °C

operating temperature	-25 to +70 °C
storage temperature	-40 to +85 °C

weight	150 g
switching hysteresis	3 mm

weight	150 g
switching hysteresis	3 mm

weight	150 g
switching hysteresis	3 mm

weight	150 g
switching hysteresis	3 mm

weight	150 g
switching hysteresis	3 mm