


deviating mirrors or columns with integrated mirrors

product	to be used with	dimensions (mm)	description / installation																																				
SLA CL	Safety light Curtains • LS2 • LS4 • LP4	 A b profile height and corresponding a mirror height B Total SL X CL height (without ST FIX or ST FLEX base) C Total SL X CL height with ST FIX base D Total SL X CL height with ST FLEX base E Max ST FLEX height from floor (load springs height) F Max ST FIX height from floor (blocks height) G Upper plate thickness including level ball H SL X CL base diameter I ST FIX or ST FLEX amount of space L ST FIX or ST FLEX amount of space a Mirror b Column housing c d Lower fixing plate for ST FLEX base e Upper fixing plate for ST FLEX where to mount SL X CL column or ST FIX ground fixing plate f Column fixing screws and orientating reference rings g ST FLEX inclination adjusting nuts or ST FIX reference plane inclination adjusting double nuts h Floor fixing nuts place	Column with mirrors for 2 beams safety light curtain																																				
SLB CL			Column with mirrors for 3 beams safety light curtain																																				
SLC CL			Column with mirrors for 4 beams safety light curtain																																				
SL 17 CL			Column with mirrors h = 1,700 mm																																				
SL 20 CL			Column with mirrors h = 2,000 mm																																				
		<table><tr><th>model</th><th>QUOTE A ⁽¹⁾</th><th>QUOTE B ⁽²⁾</th><th>QUOTE C ⁽³⁾</th><th>QUOTE D ⁽⁴⁾</th><th>application</th></tr><tr><td>SL A CL</td><td>1,000</td><td>1,016</td><td>1,036</td><td>1,066</td><td>2 beams perimetral protection</td></tr><tr><td>SL B CL</td><td>1,200</td><td>1,216</td><td>1,246</td><td>1,256</td><td>3 beams perimetral protection</td></tr><tr><td>SL C CL</td><td>1,330</td><td>1,346</td><td>1,366</td><td>1,386</td><td>4 beams perimetral protection</td></tr><tr><td>SL 17 CL</td><td>1,700</td><td>1,716</td><td>1,736</td><td>1,756</td><td>Perimetral protection with height up to 1,360 mm</td></tr><tr><td>SL 20 CL</td><td>1,970</td><td>1,986</td><td>2,006</td><td>2,026</td><td>Perimetral protection with height up to 1,660mm</td></tr></table>	model	QUOTE A ⁽¹⁾	QUOTE B ⁽²⁾	QUOTE C ⁽³⁾	QUOTE D ⁽⁴⁾	application	SL A CL	1,000	1,016	1,036	1,066	2 beams perimetral protection	SL B CL	1,200	1,216	1,246	1,256	3 beams perimetral protection	SL C CL	1,330	1,346	1,366	1,386	4 beams perimetral protection	SL 17 CL	1,700	1,716	1,736	1,756	Perimetral protection with height up to 1,360 mm	SL 20 CL	1,970	1,986	2,006	2,026	Perimetral protection with height up to 1,660mm	
model	QUOTE A ⁽¹⁾	QUOTE B ⁽²⁾	QUOTE C ⁽³⁾	QUOTE D ⁽⁴⁾	application																																		
SL A CL	1,000	1,016	1,036	1,066	2 beams perimetral protection																																		
SL B CL	1,200	1,216	1,246	1,256	3 beams perimetral protection																																		
SL C CL	1,330	1,346	1,366	1,386	4 beams perimetral protection																																		
SL 17 CL	1,700	1,716	1,736	1,756	Perimetral protection with height up to 1,360 mm																																		
SL 20 CL	1,970	1,986	2,006	2,026	Perimetral protection with height up to 1,660mm																																		

⁽¹⁾ Housing or mirror height ⁽²⁾ Total column height without base
⁽³⁾ Total height with ST FIX base ⁽⁴⁾ Total height with ST FLEX base

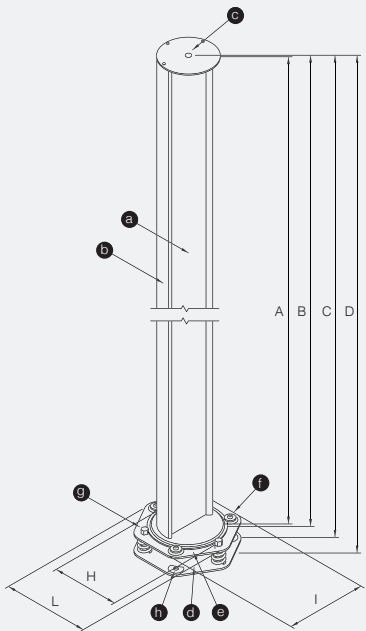

product	to be used with	dimensions (mm)	description / installation
SL 015	Safety light Curtains • LS2 • LS4 • LP4		Mirror for 160 mm protected height
SL 030			Mirror for 310 mm protected height
SL 045			Mirror for 460 mm protected height
SL 060			Mirror for 610 mm protected height
SL 075			Mirror for 760 mm protected height
SL 090			Mirror for 910 mm protected height
SL 105			Mirror for 1,060 mm protected height
SL 120			Mirror for 1,210 mm protected height
SL 135			Mirror for 1,360 mm protected height
SL 150			Mirror for 1,510 mm protected height
SL 165			Mirror for 1,660 mm protected height
SL 180			Mirror for 1,810 mm protected height

model	mirror	Safety light Curtain	
	H	protected height	type
SL 015	250	160	light Curtain
SL 030	400	310	
SL 045	540	460	
SL 060	715	610	2 beams
SL 075	885	760	light Curtain
SL 090	1,060	910	3 beams
SL 105	1,230	1,060	4 beams
SL 120	1,400	1,210	light Curtain
SL 135	1,450	1,360	
SL 150	1,600	1,510	
SL 165	1,750	1,660	
SL 180	1,900	1,810	