


## AM2DR-LPZ



Click to  
**ORDER**  
samples

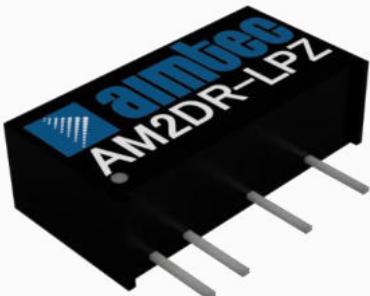

SIP7 Package


## Features



- High I/O Isolation of 1500VDC
- Continuous Short circuit protection
- Operating Temp: -40 °C to +85 °C
- Industry standard SIP7 pin-out
- Efficiency up to 72%
- Regulated output



## Summary

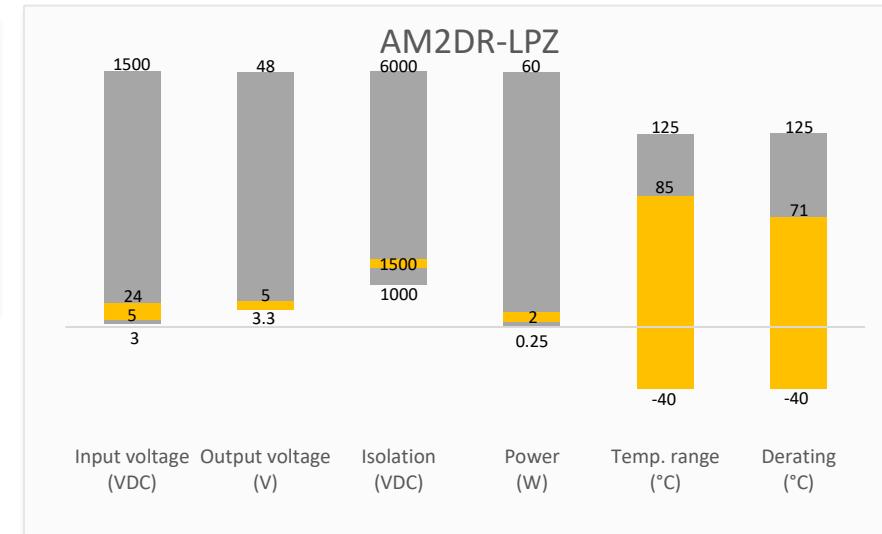

## Training



Press Release

Coming Soon!

## Applications



IoT



Industrial



Telecom



Portable Equipment

Product Training Video  
(click to open)

Application Notes

## Models & Specifications



### Single Output

Model	Input Voltage (VDC)	Output Voltage (VDC)	Input Current Full   No load typ. (mA)	Output Current max   min (mA)	Isolation (VDC)	Maximum capacitive Load (μF)	Efficiency Typ. (%)
AM2DR-0503SLPZ	5 (4.75-5.25)	3.3	460 / 7	400 / 0	1500	2400	68
AM2DR-0505SLPZ	5 (4.75-5.25)	5	460 / 7	400 / 0	1500	2400	72
AM2DR-1203SLPZ	12 (11.4-12.6)	3.3	210 / 8	400 / 0	1500	2400	68
AM2DR-1205SLPZ	12 (11.4-12.6)	5	210 / 8	400 / 0	1500	2400	72
AM2DR-2403SLPZ	24 (22.8-25.2)	3.3	90 / 6	400 / 0	1500	2400	68
AM2DR-2405SLPZ	24 (22.8-25.2)	5	90 / 6	400 / 0	1500	2400	72

### Input Specification

Parameters	Conditions	Typical	Maximum	Units
Filter	Capacitor			
Input reflected ripple current		15		mA

### Isolation Specification

Parameters	Conditions	Typical	Maximum	Units
Tested I/O voltage	60 sec, leakage $\leq$ 1mA	>1500		VDC
Resistance	500VDC	>1000		MΩ
Capacitance	100kHz/0.1V	20		pF

### Output Specification

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy			$\pm 3$	%
Line regulation	Per 1% Vin change		$\pm 0.25$	%
Load regulation	10-100% load, 3.3Vout		$\pm 3$	%
	10-100% load, others		$\pm 2$	%
Ripple & Noise*	3.3Vout models	50	100	mV pk-pk
	5Vout models	30	75	mV pk-pk
Temperature coefficient		$\pm 0.02$		%/°C

\* Ripple and Noise are measured at 20MHz bandwidth. Please refer to the application note for specific details.

### General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency	Full load, nominal input	250		KHz
Short circuit protection	Continuous, Auto recovery			
Operating temperature	With derating at 71°C	-40 to +85		°C
Storage temperature		-55 to +125		°C
Case temperature rise	Ambient temperature at 25°C	25		°C
Manual soldering temperature	1.5mm away from case, duration $\leq$ 10sec		300	°C
Cooling	Free air convection			
Humidity	Non-condensing	>5	95	% RH

Vibration	10-150Hz, 5G, 0.75mm along all axis		
Case material	Black plastic (flammability to UL 94V-0)		
Weight		2.4	g
Dimensions (L x W x H)	0.77 x 0.28 x 0.40 inches (19.65 x 7.05 x 10.16 mm)		
MTBF	3 500 000 hrs (MIL-HDBK-217F, t=+25°C) / Full Load		


NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.

## Safety Specifications


### Parameters

Standards	Information technology Equipment	Design to meet UL/EN/IEC 62368-1
	EMC - Conducted and radiated emission	CISPR32 / EN55032, class B with the recommended EMI circuit
	Electrostatic Discharge Immunity	IEC 61000-4-2 Air ±8kV, Contact ±4kV, Criteria B

## Derating

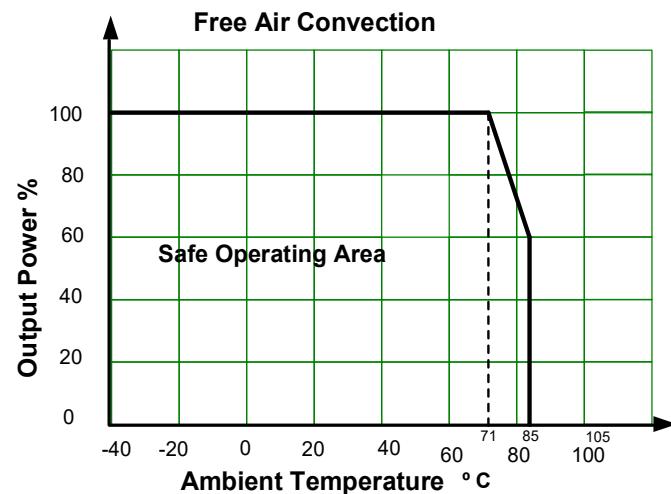


## Typical application circuit

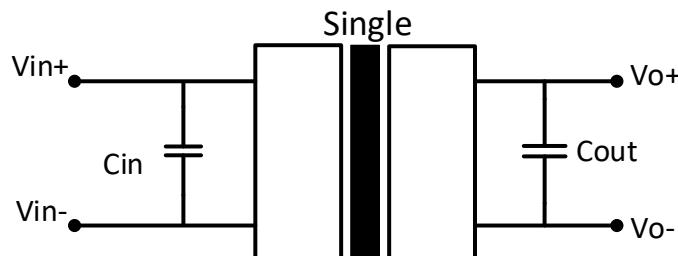



Vin	Cin	Vout	Cout
5V	4.7µF, 16V	3.3/5V	10µF/16V
12V	2.2µF/25V		
24V	0.47µF/50V		

## Recommended EMI circuit

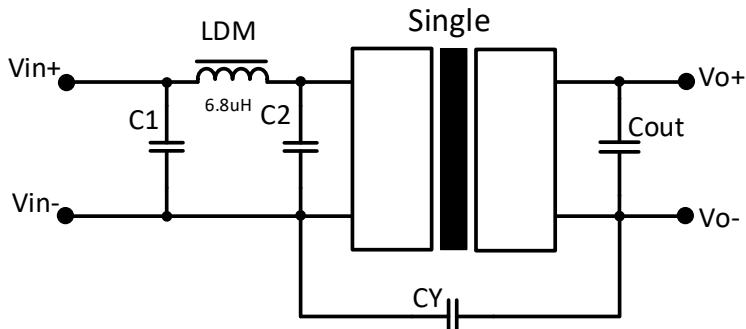

Vin	C1/C2	CY
5/12/24V	4.7μF/25V	100pF/2kVdc

## Dimensions

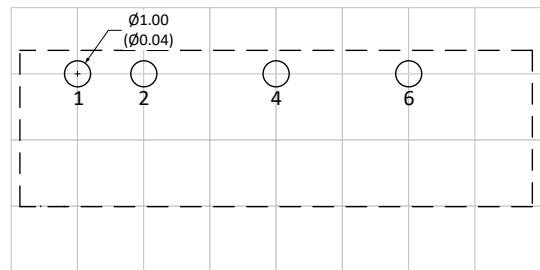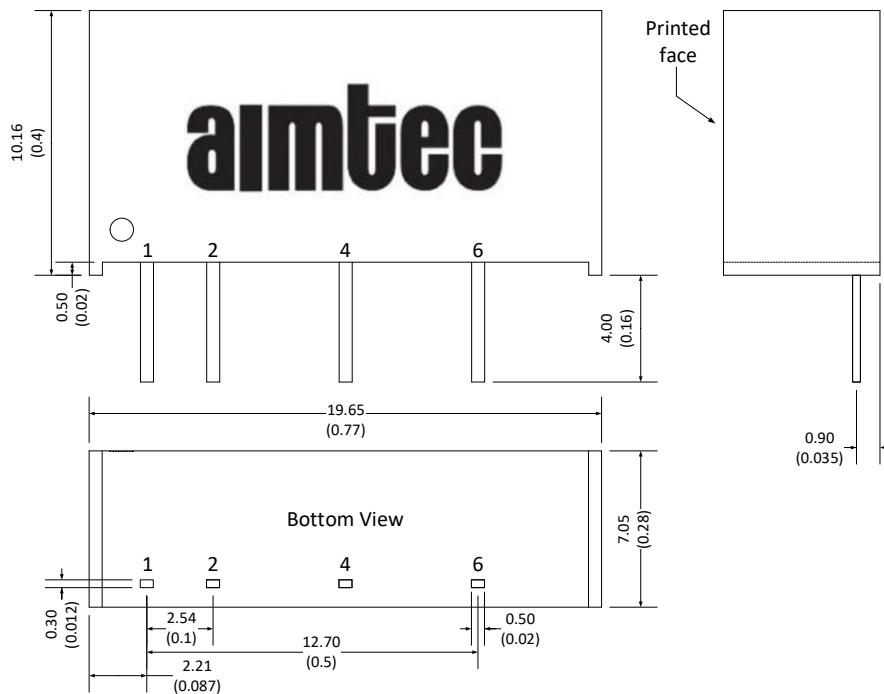

Grid size: 2.54\*2.54mm

Note:  
Unit: mm(inch)  
General tolerance:  $\pm 0.50$  (0.02)  
Pin tolerance:  $\pm 0.1$  (0.004)

Pin Out Specifications	
Pin	Single
1	+V Input
2	-V Input
4	-V Output
6	+V Output

**NOTE: 1.** Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to [www.aimtec.com](http://www.aimtec.com) for the most current product specifications. **2.** Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. **3.** Mechanical drawings and specifications are for reference only. **4.** All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. **5.** Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. **6.** This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. **7.** Warranty is in accordance with Aimtec's standard Terms of Sale available at [www.aimtec.com](http://www.aimtec.com).