

AM2SS-LPZ



SIP4 Package

Click to
ORDER
samples

The AM2SS-LPZ is a 2W SIP4 DC/DC converter that offers great cost savings thanks to an improved manufacturing process. It also features excellent reliability and performance while offering a standard input voltage range of 5-24VDC as well as an output voltage of 3.3-24V. This compact SIP4 design will surely benefit your new system design.


This new series offers great operating temperatures, from -40 to 105°C with full power up to 85°C. Also, an isolation of 1500VDC for improved reliability and system safety as well as a great 3,500,000h MTBF come standard.

The AM2SS-LPZ is suitable for instrumentation, industrial controls, industrial applications, communication and IoT applications.

Features

- High I/O Isolation of 1500VDC
- Continuous Short circuit protection
- Operating Temp: -40 °C to +105 °C
- Industry standard SIP4 pin-out
- Efficiency up to 86%
- Unregulated output

Summary

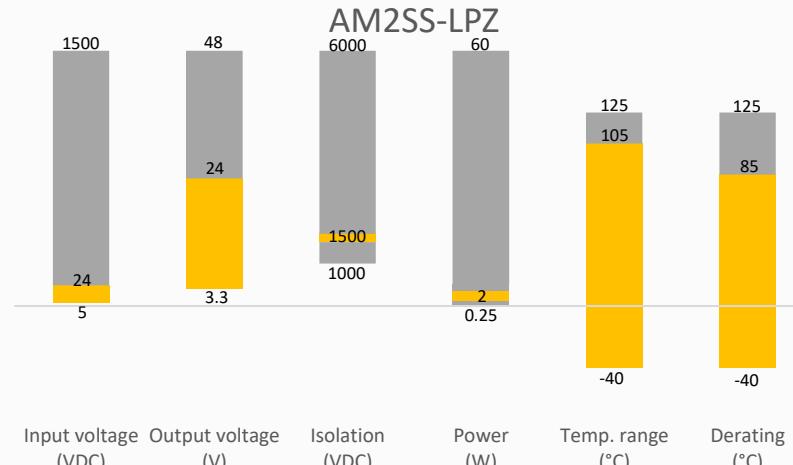

Training



Product Training Video
(click to open)

Applications



IoT

Industrial

Telecom

Portable Equipment



Application Notes

Models & Specifications



Single Output

Model	Input Voltage (VDC)	Output Voltage (VDC)	Output Current max min (mA)*	Isolation (VDC)	Maximum capacitive Load (μF)	Efficiency Typ. (%)
AM2SS-0505SLPZ	5 (4.5-5.5)	5	400 / 40	1500	2400	80
AM2SS-0509SLPZ	5 (4.5-5.5)	9	222 / 22	1500	1000	80
AM2SS-0512SLPZ	5 (4.5-5.5)	12	167 / 17	1500	560	80
AM2SS-0515SLPZ	5 (4.5-5.5)	15	133 / 13	1500	560	80
AM2SS-0524SLPZ	5 (4.5-5.5)	24	83 / 8	1500	220	80
AM2SS-1203SLPZ	12 (10.8-13.2)	3.3	400 / 40	1500	2400	79
AM2SS-1205SLPZ	12 (10.8-13.2)	5	400 / 40	1500	2400	82
AM2SS-1209SLPZ	12 (10.8-13.2)	9	222 / 22	1500	1000	82
AM2SS-1212SLPZ	12 (10.8-13.2)	12	167 / 17	1500	560	84
AM2SS-2405SLPZ	24 (21.6-26.4)	5	400 / 40	1500	2400	80
AM2SS-2415SLPZ	24 (21.6-26.4)	15	133 / 13	1500	560	84
AM2SS-2424SLPZ	24 (21.6-26.4)	24	83 / 8	1500	220	86

* Performance will be degraded if the load is not within the output current range.

Input Specification

Parameters	Conditions	Typical	Maximum	Units
Input current	Full load, 5Vin	500		mA
	Full load, 12in	200		mA
	Full load, 24Vin	100		mA
No load input current		8		mA
Filter	Capacitor			
Absolute maximum rating	Maximum duration 1s, 5Vin	>-0.7	9	VDC
	Maximum duration 1s, 12Vin	>-0.7	18	VDC
	Maximum duration 1s, 24Vin	>-0.7	30	VDC
Input reflected ripple current		15		mA

Isolation Specification

Parameters	Conditions	Typical	Maximum	Units
Tested I/O voltage	60 sec, leakage \leq 1mA	>1500		VDC
Resistance	500VDC	>1000		MΩ
Capacitance	100kHz/0.1V	20		pF

Output Specification

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy	See output voltage tolerance		15	%
Line regulation	Per 1% Vin change, 3.3Vout models		1.5	%
	Per 1% Vin change, other models		1.2	%
Load regulation	10-100% load, 3.3Vout	12	25	%
	10-100% load, 5Vout	10	20	%
	10-100% load, 9Vout	8	15	%
	10-100% load, 12Vout	8	15	%

	10-100% load, 15Vout	8	15	%
	10-100% load, 24Vout	8	15	%
Ripple & Noise*		75	200	mV pk-pk
Temperature coefficient		±0.03		%/°C

* Ripple and Noise are measured at 20MHz bandwidth. Please refer to the application note for specific details.

General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency	Full load	220		KHz
Short circuit protection		Continuous, Auto recovery		
Operating temperature	With derating	-40 to +105		°C
Storage temperature		-55 to +125		°C
Case temperature rise	Full load	15		°C
Manual soldering temperature	1.5mm away from case, duration ≤ 10sec		300	°C
Cooling		Free air convection		
Humidity	Non-condensing	>5	95	% RH
Vibration		10-150Hz, 5G, 0.75mm, along X, Y and Z		
Case material		Black plastic (flammability to UL 94V-0)		
Weight		1.6		g
Dimensions (L x W x H)		0.46 x 0.24 x 0.40 inches (11.60 x 6.00 x 10.20 mm)		
MTBF		3 500 000 hrs (MIL-HDBK -217F, t=+25°C) / Full Load		


NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.

Safety Specifications

Parameters


Standards	Information technology Equipment	Design to meet UL/EN/IEC 62368-1
	EMC - Conducted and radiated emission	CISPR32 / EN55032, class B with the recommended EMI circuit
	Electrostatic Discharge Immunity	IEC 61000-4-2 Air ±8KV, Contact ±6KV, Criteria B

Derating

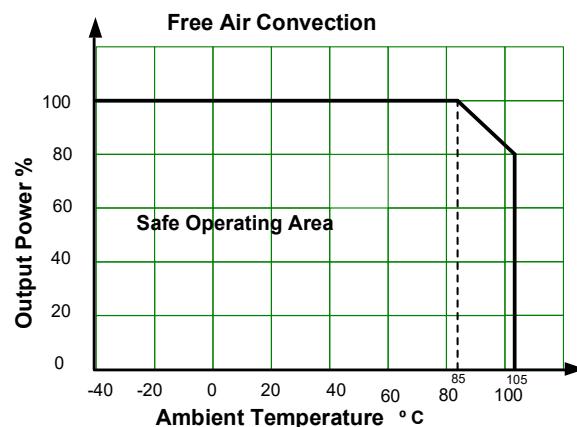


Output voltage tolerance


3.3Vout models

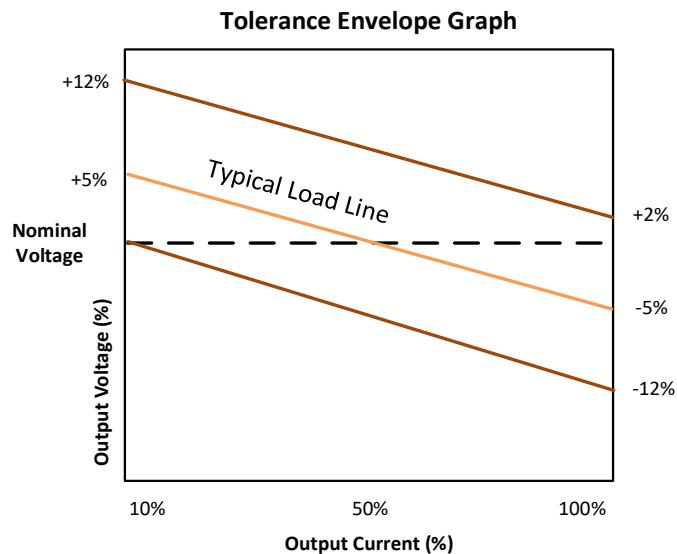

Others

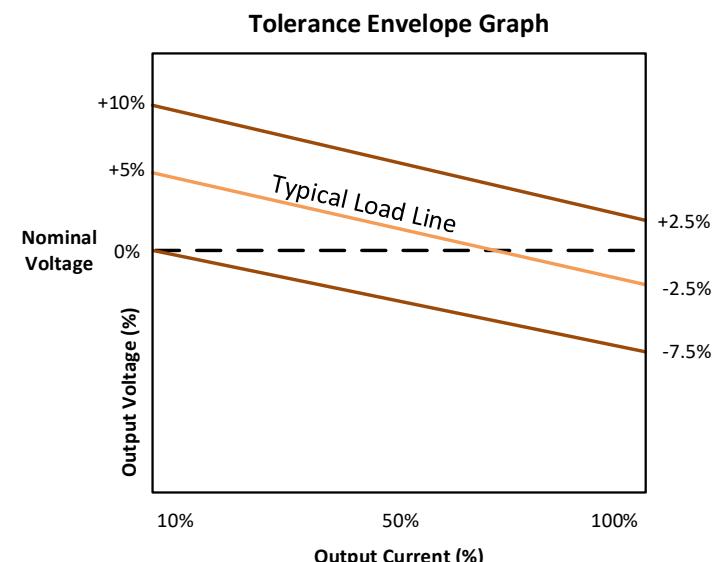


Typical application circuit

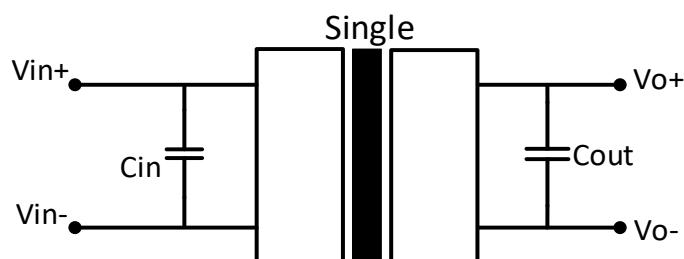

Vin	Cin
3.3V	4.7μF/16V
5V	4.7μF/16V
12	2.2μF/25V
15V	2.2μF/25V
24V	1μF/50V




Vout	Cout
3.3V	10μF/16V
5V	10μF/16V
9V	4.7μF/16V
12V	2.2μF/25V
15V	1μF/25V
24V	0.47μF/50V

Recommended EMI circuit

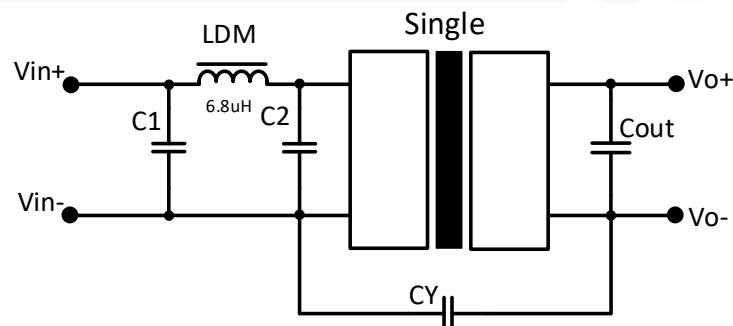

Vout	C1/C2	CY
3.3/5/9/12/15/24V	4.7μF/50V	1nF/2kVdc

Dimensions

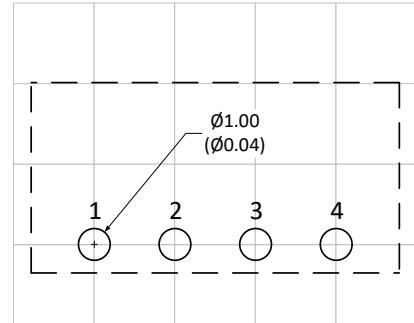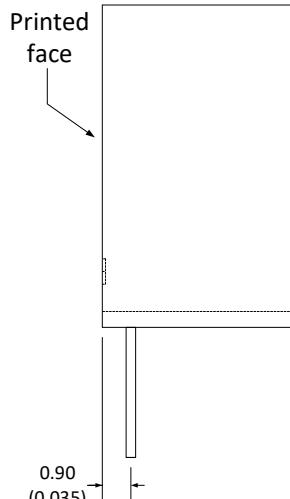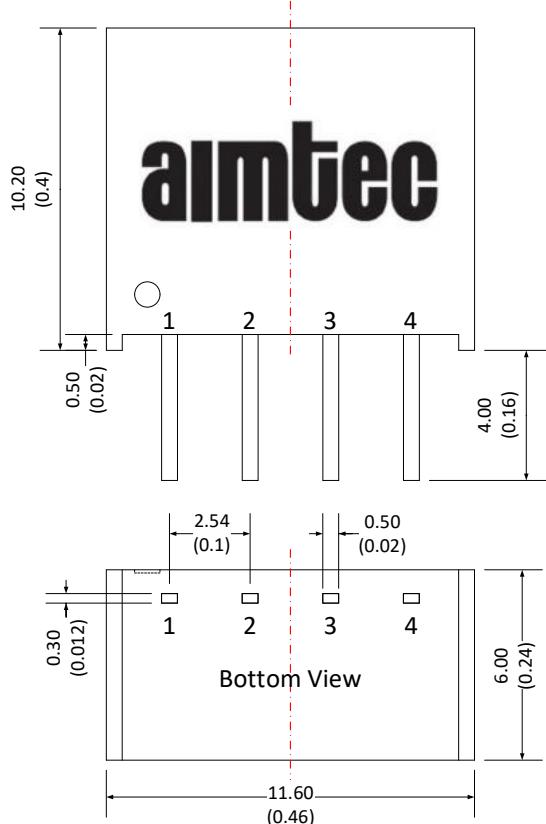

Grid size: 2.54*2.54mm

Note:
Unit: mm(inch)
General tolerance: ± 0.50 (0.02)
Pin tolerance: ± 0.1 (0.004)

Pin Out Specifications	
Pin	Single output
1	-V Input
2	+V Input
3	-V Output
4	+V Output

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.