

AMED480T-GY



Click to
ORDER
samples



DIN Rail

Features



- Universal Input: 340 - 550VAC/480 - 780VDC
- Operating Temp: -30 °C to +70 °C
- High isolation voltage: 4870VAC
- Low ripple & noise, 150mV(p-p), max.
- Short circuit protection, over-voltage protection, overload protection, and over-temperature protection
- Designed for triple-phase applications



Training




Product Training Video
(click to open)



Coming Soon!

Summary

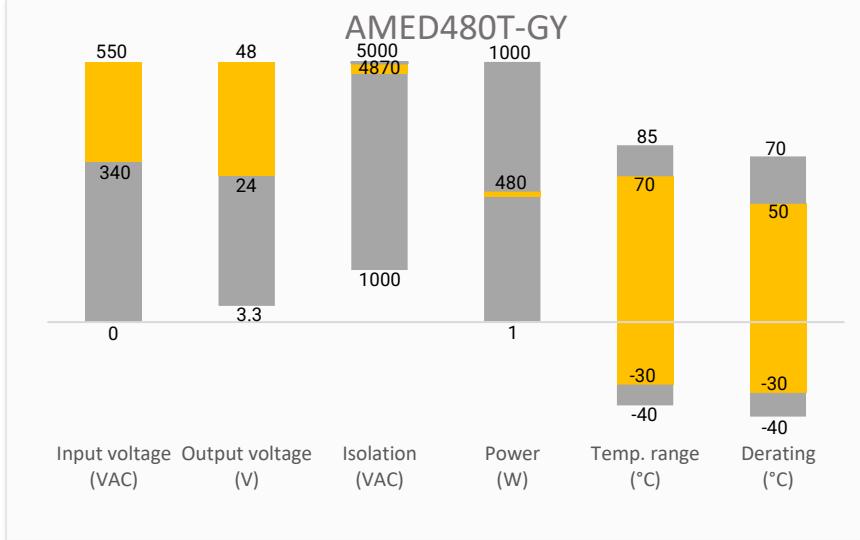

Applications



Power Grid



Industrial



Telecom

Application Notes

Models & Specifications



Model	Input Voltage (VAC/Hz)	Input Voltage (VDC)	Max Output wattage (W)	Output Voltage (V)	Output Current max (A)	Efficiency Typ. (%)
AMED480T-24SGY	340~550/47~63	480~780	480	24	20	92.5
AMED480T-48SGY	340~550/47~63	480~780	480	48	10	93

Input Specifications					
Parameters	Conditions	Typical	Maximum	Units	
Input Current	400VAC		0.85	A	
	500VAC		0.7	A	
Inrush Current	cold start	50		A	
Leakage Current	530VAC	<3.5		mA	
Power Factor	400VAC at full load	≥ 0.9			
	500VAC at full load	≥ 0.88			

Output Specifications					
Parameters	Conditions	Typical	Maximum	Units	
Voltage accuracy	0 - 100% load	± 1		%	
Line regulation	Rated load	± 0.5		%	
Load regulation	0 - 100% load	± 1		%	
Ripple & Noise*	24 VDC Output		150	mV p-p	
	48 VDC Output		150	mV p-p	
Start-up time	400VAC input, full load		1.2	s	
	500VAC input, full load		0.8	s	
Rise time	400VAC input, full load		60	ms	
	500VAC input, full load		60	ms	
Hold up time	400VAC input, full load	20		ms	
	500VAC input, full load	20		ms	
Voltage adjustable range	24 VDC Output	24 - 28		V	
	48 VDC Output	48 - 55		V	

* Ripple and Noise are measured at 20MHz bandwidth. Please refer to the application note for specific details. Measured with a 47 μ F electrolytic capacitor and a 0.1 μ F ceramic capacitor.

Isolation Specifications					
Parameters	Conditions	Typical	Maximum	Units	
Tested I/O voltage	60 sec, Leakage current < 10mA	4870		VAC	
Tested Input to GND voltage	60 sec, Leakage current < 10mA	2400		VAC	
Tested Output to GND voltage	60 sec, Leakage current < 10mA	500		VAC	
Insulation resistance	500VDC, 25°C, 70% RH	>100		M Ω	


General Specifications				
Parameters	Conditions	Typical	Maximum	Units
Over voltage protection	24 VDC Output, manual-recovery	≤ 33		VDC
	48 VDC Output, manual-recovery	≤ 65		VDC
Over temperature protection	Shuts down output voltage, auto-recovery			
Overload protection	105 ~ 130% rated output power, constant current limiting, hiccup mode after 3 sec., manual-recovery			
Short circuit protection	Hiccup, auto-recovery			
Operating temperature	20 ~ 95% RH	-30 to +70		°C
Storage temperature	10 ~ 95% RH	-40 to +85		°C
Power derating	550VAC, 60 °C to 70 °C	2.5		% / °C
	340 to 380 VAC	0.25		% / VAC
Temperature coefficient	0~50°C	± 0.03		% / °C
Cooling	Free air convection			
Storage Humidity	Non-condensing	>10	95	% RH
Operating Humidity	Non-condensing	>20	95	% RH
Case material	Metal			
Weight		1510		g
Dimensions (L x W x H)	3.37 x 5.08 x 4.92 inches (85.50 x 129.00 x 125.0 mm)			
MTBF	1000K hrs min. Telcordia SR-332(Bellcore)			
NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.				

Safety Specifications				
Parameters				
Agency approval	UL61010-1, UL61010-2-201, BS EN/EN61558-1, BS EN/EN61558-2-16			
Standards	EMC - Conducted and radiated emission	CISPR32 / EN55032, Class B		
	Electrostatic Discharge Immunity	IEC/EN 61000-4-2 Contact ±4KV, Air ±8KV, Criteria B		
	RF, Electromagnetic Field Immunity	IEC/EN 61000-4-3 3V/m, Criteria A		
	Electrical Fast Transient/Burst Immunity	IEC/EN 61000-4-4 1KV, Criteria B		
	Surge Immunity	IEC/EN 61000-4-5 L-L ±1KV, L-G ±2KV, Criteria B		
	CS, Conducted Disturbance Immunity	IEC/EN 61000-4-6 3V, 3V~1V, 1V r.m.s, Criteria A		
	Power Frequency Magnetic Field Immunity	IEC/EN 61000-4-8 50, 60Hz, Criteria A		


Derating






Temperature Derating

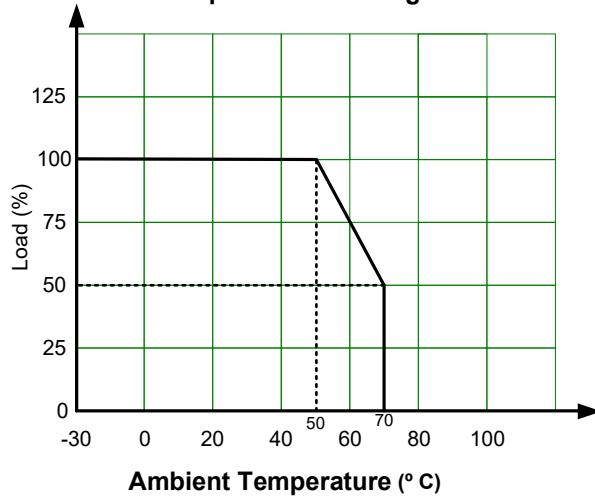

Input Voltage Derating

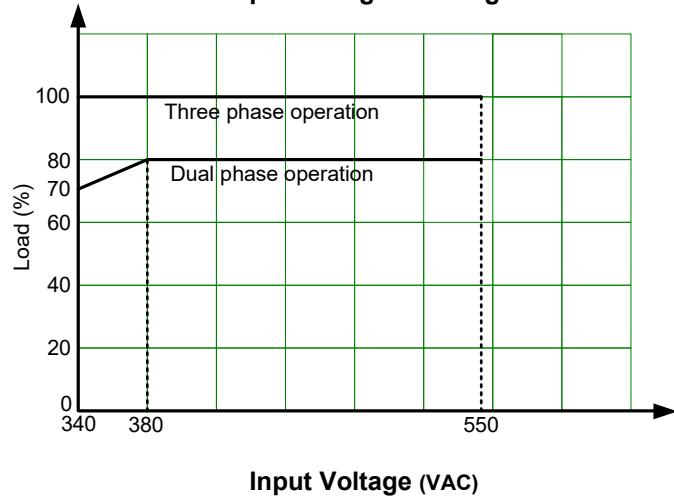


Dimensions

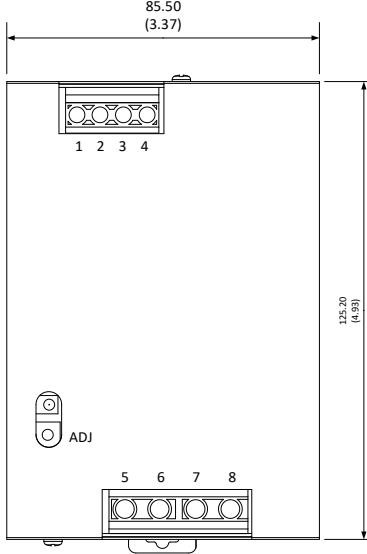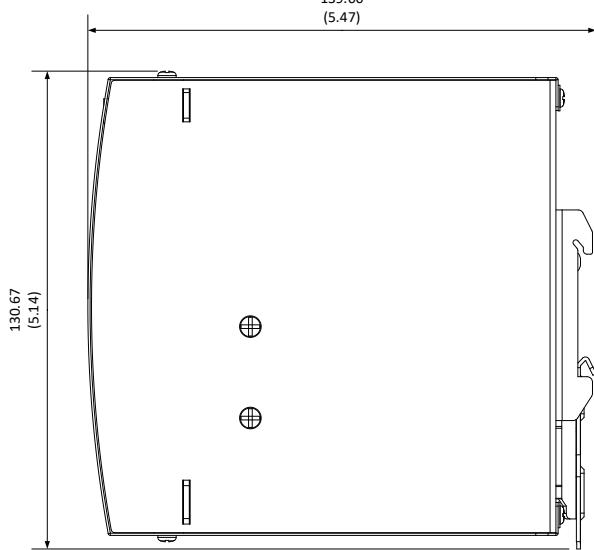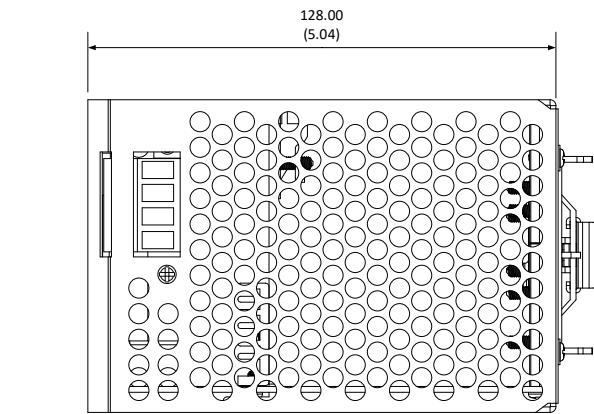

Pin Output Specifications	
Pin	Function
1	+V Output
2	+V Output
3	-V Output
4	-V Output
5	GND \pm
6	L3
7	L2
8	L1
ADJ	Voltage Adjustment

Functional Diagram

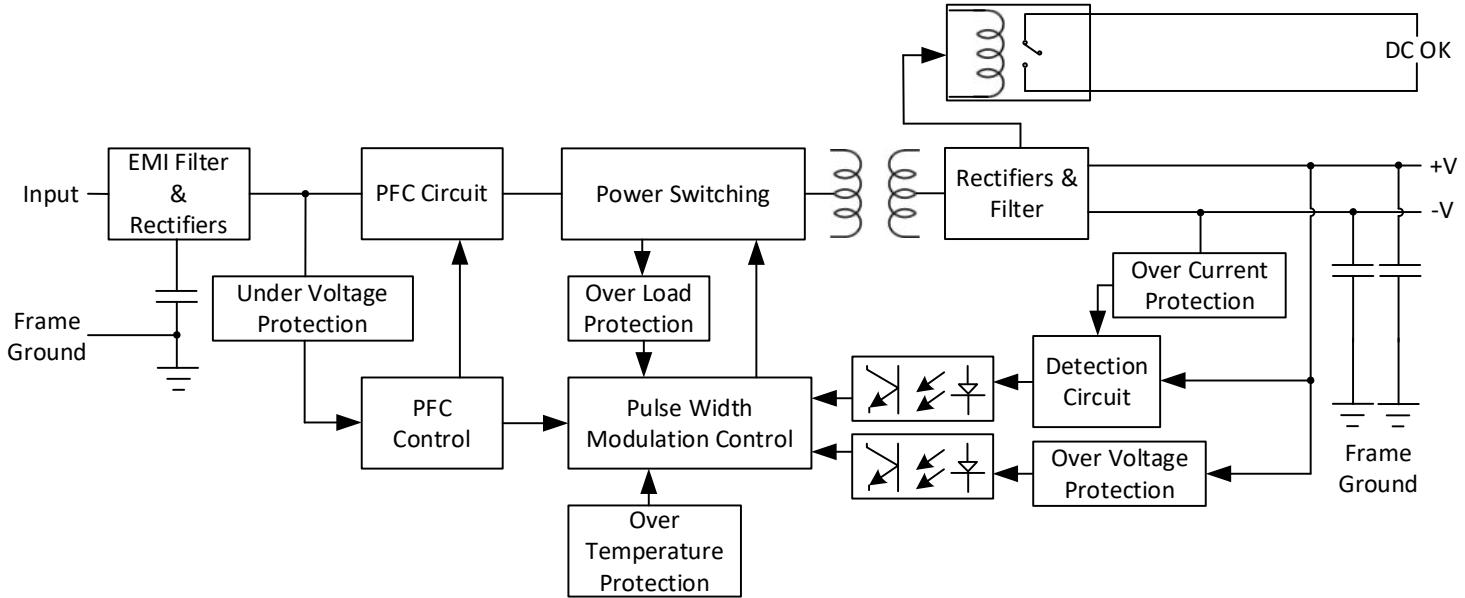

DC OK Relay Contact

Contact Closed	Power Supply Unit turns on / DC OK
Contact Open	Power Supply Unit turns off / DC FAIL
Contact Ratings (maximum)	60VDC/0.3A, 30VDC/1 A, 30VAC/0.5A resistive load

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.