


AMEOFP250-TZ



Click to
ORDER
samples

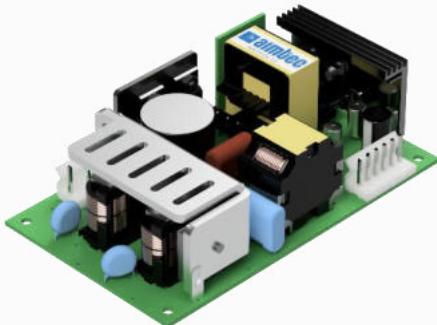

Open Frame

Features




- Universal Input: 90 - 264VAC
- Low leakage current: 3.5mA max.
- Output short circuit, over-current, over-voltage,
- Approvals: CE EN62368-1 and UL62368-1
- Designed to meet IEC62368-1

Summary



AMEOFP250-TZ

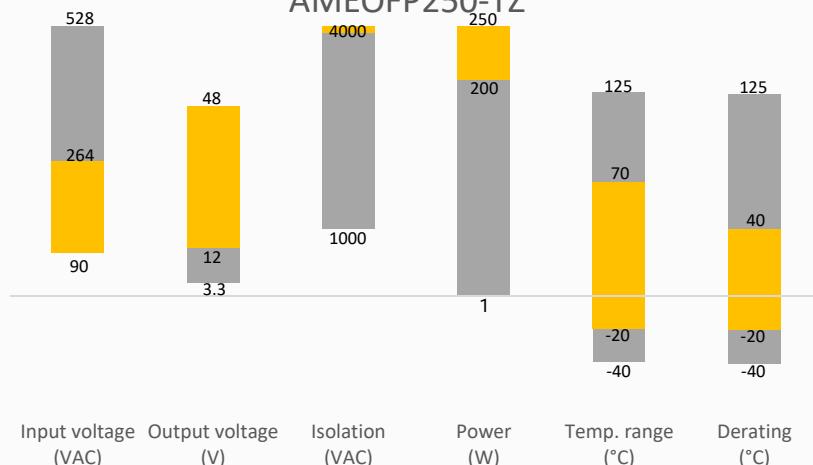

Training



Product Training Video
(click to open)



Press Release

Coming Soon!

Application Notes

Applications



Power Grid



Industrial



Telecom

Models & Specifications



Model	Input Voltage (VAC/Hz)	Cooling method	Max Output wattage (W)	Output Voltage (V)	Output Voltage Adjustable Range (V)	Max Output Current (A)	Efficiency @230VAC Typ. (%)
AMEOFP250-12SH40TZ	90-264/ 47-63	Free air	200	12	11.4-12.6	16.67	91
		11.3CFM	250			20.83	
AMEOFP250-24SH40TZ	90-264/ 47-63	Free air	200	24	22.8-25.2	8.33	94
		11.3CFM	250			10.41	
AMEOFP250-48SH40TZ	90-264/ 47-63	Free air	200	48	45.6-50.4	4.16	93
		11.3CFM	250			5.20	
AMEOFP250-55SH40TZ	90-264/ 47-63	Free air	200	55	52.25-57.75	3.63	93
		11.3CFM	250			4.54	

Input Specifications

Parameters	Conditions	Typical	Maximum	Units
Input current			3.5	A
Inrush current	120VAC, cold start		50	A
	240VAC, cold start		100	A
Leakage current	264VAC		3.5	mA
Power factor	115VAC, 100% load		0.95	

Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Line regulation	Full load	±1		%
Load regulation	0-100% load	±5		%
Ripple & Noise*	12Vout	120		mV p-p
	24Vout	300		mV p-p
	48Vout	400		mV p-p
	55Vout	400		mV p-p
Hold up time	115VAC, 80% load	≥10		ms

* Ripple and Noise are measured at 20MHz bandwidth. Open frame models are measured with a 10µF electrolytic capacitor and a 0.1µF ceramic capacitor. Enclosed models are measured with a 47µF electrolytic capacitor and a 0.1µF ceramic capacitor. Please refer to the application note for specific details.

Isolation Specification

Parameters	Conditions	Typical	Maximum	Units
Tested I/O voltage	60 sec, leakage ≤ 10mA		4000	VDC
Tested I/PE voltage	3 sec, leakage ≤ 10mA		1800	VAC
Tested O/PE voltage	3 sec, leakage ≤ 10mA		500	VDC
Resistance I/O*	500VDC	>20		MΩ

* Tested under 25±5°C ambient temperature with relative humidity <95% and no condensation.

General Specifications

Parameters	Conditions	Typical	Maximum	Units
Over current protection	12Vout, Auto recovery		27	A
	24Vout, Auto recovery		14	A
	48Vout, Auto recovery		7	A
	55Vout, Auto recovery		6	A
Over voltage protection	12Vout, shut down, Auto recovery		15.6	VDC
	24Vout, shut down, Auto recovery		32	VDC
	48Vout, shut down, Auto recovery		60	VDC
	55Vout, shut down, Auto recovery		65	VDC
Short circuit protection	Continuous, Auto recovery			
Operating temperature	See derating graph	-20 to +70		°C
Storage temperature		-40 to +85		°C
Operating altitude			5000	m
Power Derating	+50 °C to +70 °C	2.5		%/°C
	12V +40 °C to +70 °C, free air convection	2.5		%/°C
	90VAC to 100VAC, free air convection	1		%/VAC
Temperature coefficient		±0.03		%/°C
Cooling	Free air convection, forced air convection 11.3CFM			
Humidity	Non-condensing, storage	>5	95	% RH
	Non-condensing, operating	>20	90	% RH
Case material	Metal (1100 Aluminum, SUS304)			
Weight		310		g
Dimensions (L x W x H)	5.00 x 3.00 x 1.32 inches (127.0x 76.2 x 33.4 mm) above PCB			
MTBF	> 500,000 hrs (SR332, issue 2, t=+25°C)			



NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.

Safety Specifications




Parameters			
Agency approvals	CE EN62368-1, UL62368-1		
Standards	Design to meet IEC62368-1		
	EMC - Conducted and radiated emission*	CISPR32 / EN55032, conducted class B CISPR32 / EN55032, radiated class B with protective earth connection CISPR32 / EN55032, radiated class B without protective earth connection	
	EMC - Harmonic current emissions*	IEC 61000-3-2 class D	
	Electrostatic Discharge Immunity	IEC 61000-4-2 Contact ±8KV, Air ±15KV, Criteria A	
	Electrical Fast Transient/Burst Immunity	IEC 61000-4-4 ±2KV, Criteria A	
	Surge Immunity	IEC 61000-4-5 L-L ±2KV L-G ±4KV, Criteria A	

* The power supply is considered as a component and will be installed in an end-product. All the EMC tests are performed with the power supply mounted on a 1mm thick 360mm x 360mm metal plate. The EMC compliance of the end-product must be reconfirmed.

Derating

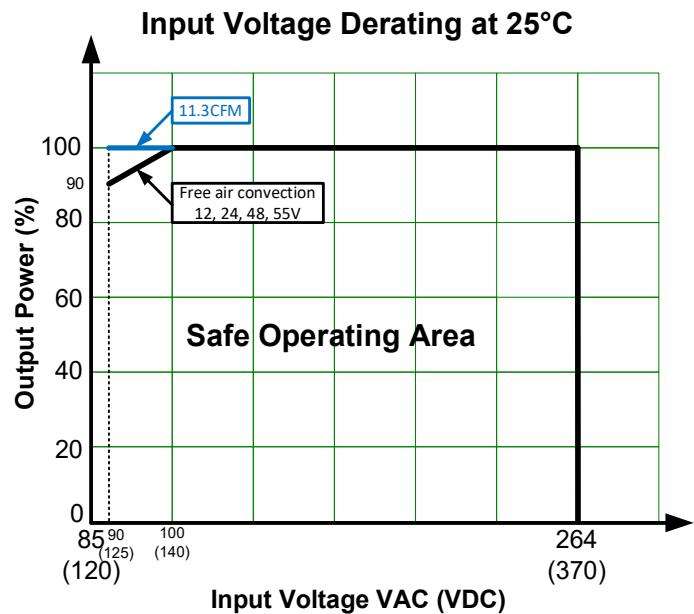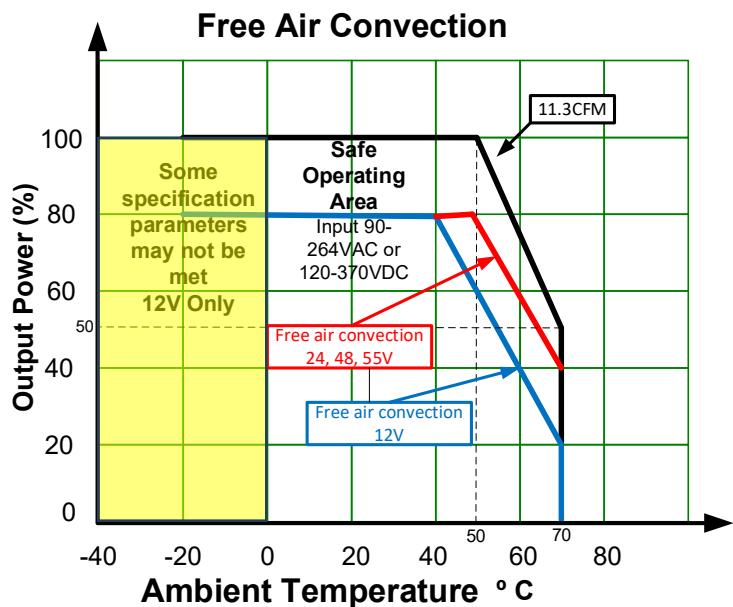

Dimensions

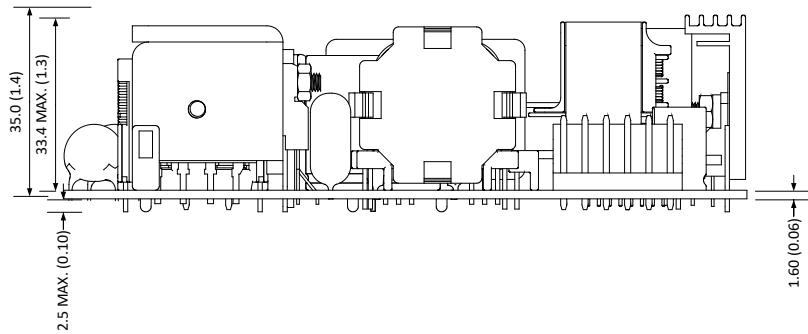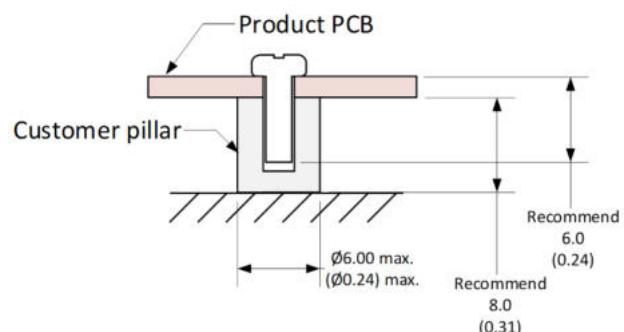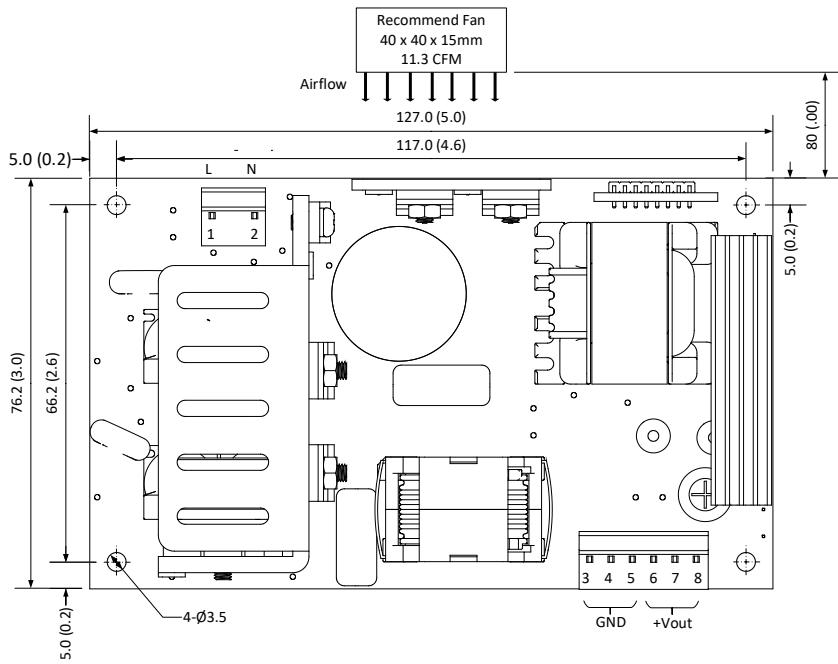

Note:

It is needed to have $\geq 10\text{mm}$ distance between the product and external components for safety.

Note:
Unit: mm [inch]
General tolerance: ± 1.00 (± 0.04)
Mounting screw: M3
Mounting screw tightening torque: 0.4N max.

Pin	Function	Recommended connectors
1	AC Input (L)/ +V Input	TKP P8800I-03-N2 WST M3-I39601S JWT A3961WV2-3P-D or equivalent
2	AC Input (N)/ -V Input	
3	-V Output	TKP P8800I-06 94V-0 WST M6-I39601 94V-0 JWT A3961WV0-6P or equivalent
4	-V Output	
5	-V Output	
6	+V Output	
7	+V Output	
8	+V Output	

NOTE: **1.** Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. **2.** Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. **3.** Mechanical drawings and specifications are for reference only. **4.** All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. **5.** Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. **6.** This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. **7.** Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.