



Universal Input/Output (HART)

FB7304B3

- 4-channel
- Inputs with plug-in Ex e terminals
- Installation in suitable enclosures in Zone 1
- Module can be exchanged under voltage (hot swap)
- Analog input, digital input, analog output, digital output
- Supply circuit 21.5 V (4 mA)
- HART communication via field bus or service bus
- Simulation mode for service operations (forcing)
- Line fault detection (LFD): one LED per channel
- Permanently self-monitoring



Function


The device is a configurable universal module. Each channel can operate in the following modes:

- As an analog input (AI) it feeds 2-wire transmitters.
- As an analog output (AO) it can drive proportional valves, I/P converters, or local indicators.
- As a digital input (DI) it reads dry contacts.
- As a digital output (DO) it can drive solenoids, sounders, or LED.

A combination of analog and digital I/O is possible.

Channel LEDs indicate the status of each channel. White LEDs indicate whether AI, AO, DI, DO are selected. The intrinsically safe signals are galvanically isolated from the bus and the power supply.

Connection

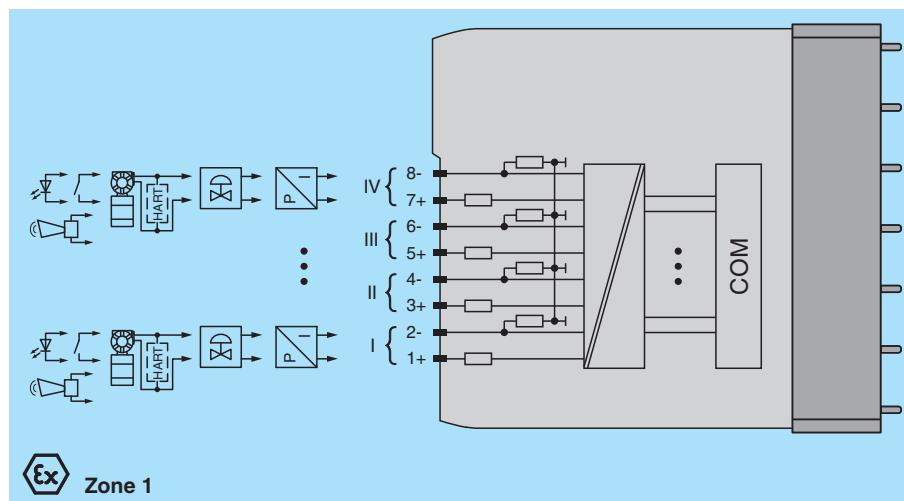

Technical Data

Slots

Occupied slots	1
----------------	---

Supply

Connection		backplane bus
Rated voltage	U_r	12 V DC, only in connection with the power supplies FB92**
Power dissipation		2 W
Power consumption		3 W

Internal bus

Connection		backplane bus
------------	--	---------------

Technical Data

Interface		manufacturer-specific bus to standard com unit
Analog input		
Number of channels	4	
Suitable field devices		
Field device	pressure converter	
Field device [2]	flow converter	
Field device [3]	level converter	
Field device [4]	Temperature Converter	
Field device interface		
Connection	2-wire transmitter	
Connection	terminals 1+, 2-; 3+, 4-; 5+, 6-; 7+, 8-	
Transmitter supply voltage	min. 15 V at 20 mA ; 21.5 V at 4 mA	
Input resistance	15 Ω	
Line fault detection	can be switched on/off for each channel via configuration tool , configurable via configuration tool	
Short-circuit	factory setting: > 21 mA Can be parameterized in the range 0 ... 22 mA	
Open-circuit	factory setting: < 3.6 mA Can be parameterized in the range 0 ... 22 mA	
HART communication	yes	
HART secondary variable	yes	
Analog output		
Number of channels	4	
Suitable field devices		
Field device	Proportional Valve	
Field device [2]	I/P converters	
Field device [3]	on-site display	
Connection	terminals 1+, 2-; 3+, 4-; 5+, 6-; 7+, 8-	
Current	0 ... 20 mA short-circuit protected	
Line fault detection	can be switched on/off for each channel via configuration tool , configurable via configuration tool	
Short-circuit	factory setting: < 50 Ω configurable between 0 ... 26 mA	
Open-circuit	deviation of preset output value > 0.5 mA	
Load	max. 750 Ω at 20 mA	
HART communication	yes	
HART secondary variable	yes	
Watchdog	output off 0.5 s after serious fault	
Digital input		
Number of channels	4	
Sensor interface		
Connection [2]	volt-free contact	
Connection	terminals 1+, 2-; 3+, 4-; 5+, 6-; 7+, 8-	
Line fault detection	can be switched on/off for each channel via configuration tool	
Connection	mechanical switch with additional resistors (see connection diagram)	
Short-circuit	> 7 mA	
Open-circuit	< 0.1 mA	
Digital signals (active)		
Switching point: ON	> 2.1 mA	
Switching point: OFF	< 1.2 mA	
Digital output		
Number of channels	4	
Suitable field devices		
Field device	Solenoid Valve	
Field device [2]	audible alarm	
Field device [3]	visual alarm	
Connection	terminals 1+, 2-, 3+, 4-, 5+, 6-, 7+, 8-	

Technical Data

Drive capability	12 V / 22 mA	
Internal resistor	R_i	385 Ω
Current limit	I_{max}	22 mA
Open loop voltage	U_s	min. 22.7 V
Line fault detection	can be switched on/off for each channel via configuration tool	
Test current		0.4 mA
Short-circuit		< 50 Ω
Open-circuit		< 0.2 mA
Transfer characteristics		
Deviation		
After calibration	0.1 % of the signal range at 20 °C (68 °F)	
Influence of ambient temperature	0.1 %/10 K of the signal range	
Resolution	12 Bit (0 ... 26 mA)	
Refresh time	approx. 100 ms (4 channels)	
Indicators/settings		
LED indication	Power LED (P) green: supply Diagnostic LED (I) red: module fault , red flashing: communication error , white: fixed parameter set (parameters from com unit are ignored) , white flashing: requests parameters from com unit Status LED (1-4) red: line fault (lead breakage or short circuit) , yellow: state of digital I/O (0/1) Configuration LED (AI, AO, DI, DO) white: selected channel mode	
Coding	optional mechanical coding via front socket	
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU	EN 61326-1:2013	
Conformity		
Electromagnetic compatibility	NE 21:2007	
Degree of protection	IEC 60529	
Environmental test	EN 60068-2-14	
Shock resistance	EN 60068-2-27	
Vibration resistance	EN 60068-2-6	
Damaging gas	EN 60068-2-42	
Relative humidity	EN 60068-2-78	
Ambient conditions		
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)	
Storage temperature	-25 ... 85 °C (-13 ... 185 °F)	
Relative humidity	95 % non-condensing	
Shock resistance	shock type I, shock duration 11 ms, shock amplitude 15 g, number of shocks 18	
Vibration resistance	frequency range 10 ... 150 Hz; transition frequency: 57.56 Hz, amplitude/acceleration ± 0.075 mm/1 g; 10 cycles frequency range 5 ... 100 Hz; transition frequency: 13.2 Hz amplitude/acceleration ± 1 mm/0.7 g; 90 minutes at each resonance	
Damaging gas	designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3	
Mechanical specifications		
Degree of protection	IP20 (module) , a separate housing is required acc. to the system description	
Connection	removable front connector with screw flange (accessory) wiring connection via spring terminals (0.14 ... 1.5 mm ²) or screw terminals (0.08 ... 1.5 mm ²)	
Mass	approx. 425 g	
Dimensions	28 x 107 x 132 mm (1.1 x 4.2 x 5.2 inch)	
Data for application in connection with hazardous areas		
EU-type examination certificate	FIDI 21 ATEX 0013 U	
Marking	Ex II 2G Ex db eb q IIC Gb	
Galvanic isolation		
Input/power supply, internal bus	safe electrical isolation acc. to EN 60079-11, voltage peak value 375 V	

Technical Data

Directive conformity	
Directive 2014/34/EU	EN 60079-0:2018 EN 60079-1:2014 EN 60079-5:2015 EN 60079-7:2015+A1:2018
International approvals	
ATEX approval	FIDI 21 ATEX 0013 U
IECEx approval	
IECEx certificate	IECEx FIDI 21.0003U
IECEx marking	Ex db eb q IIC Gb
General information	
System information	The module has to be mounted in appropriate backplanes and housings (FB92**) in Zone 1, 2, 21, 22 or outside hazardous areas (gas or dust). Here, observe the corresponding EC-type examination certificate.
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .

Assembly

