


## AMSROL-78EZ



SMD

## Features

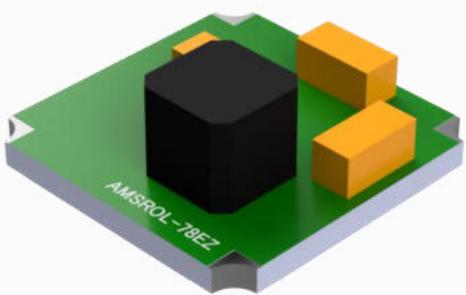


- Input Range: 4.75VDC – 36VDC
- Operating Temp: -40 °C to +85 °C
- Low ripple & noise, up to 100mV(p-p) max.
- Efficiency up to 95%
- Output short circuit protection
- Regulated Output
- Made in Taiwan

## Summary




### AMSROL-78EZ

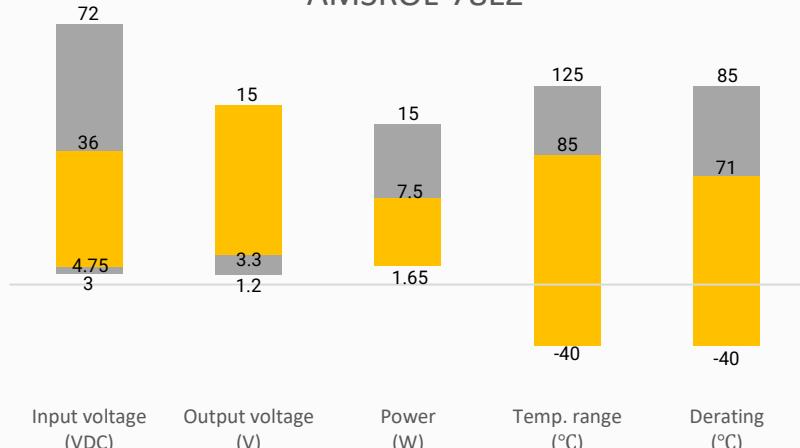

## Training



Product Training Video  
(click to open)

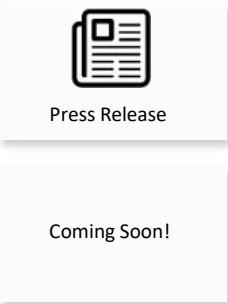

Application Notes

## Applications



IoT



Industrial



Portable Equipment



Telecommunication

Click to  
**ORDER**  
samples

## Models & Specifications



### Single Output

Model	Input Voltage (VDC)	Output Voltage (VDC)	Output Current Max (mA)	Maximum Capacitive Load ( $\mu$ F)	Efficiency (%) Full Load ( $V_{in\_Max} / V_{in\_Min}$ )
AMSROL-783.3EZTR	4.75 ~ 36	3.3	500	680	76 / 85
AMSROL-7805EZTR	6.5 ~ 36	5	500	680	81 / 90
AMSROL-786.5EZTR	8 ~ 36	6.5	500	680	83 / 91
AMSROL-7809EZTR	12 ~ 36	9	500	680	87 / 93
AMSROL-7812EZTR	15 ~ 36	12	500	680	88 / 94
AMSROL-7815EZTR	19 ~ 36	15	500	680	90 / 95

Note: Use suffix "TR" for tape & reel packing (ex. AMSROL-7805EZTR).

For input voltage exceeding 30 VDC, an input capacitor of 22uF/50V is required.

### Input Specification

Parameters	Conditions	Typical	Maximum	Units
Voltage range	See models table	--	36	VDC
No load input current		0.2	2	mA
Filter	Capacitance filter			

### Output Specification

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy	Full load, 3.3V output	$\pm 2$	$\pm 4$	%
	Others	$\pm 2$	$\pm 3$	%
Line regulation	Full load	--	$\pm 0.5$	%
Load regulation	10 ~ 100% load, 3.3V,5V output model	--	$\pm 1$	%
Short circuit protection		Continuous, Auto recovery		
Temperature coefficient	Full load	$\pm 0.02$	--	%/°C
Ripple & Noise*	20MHz bandwidth, without output capacitor	--	100	mV pk-pk
Transient recovery time	50% load step change	250	--	$\mu$ s

### General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency	Full load	1200	--	KHz
Operating temperature	With derating at 71 °C	-40 to +85		°C
Storage temperature		-55 to +125		°C
Reflow soldering temperature	Peak temp $\leq$ 245°C, 60 sec max at 217°C, please refer to IPC/JEDEC J-STD-020D.1.			
Cooling	Free air convection			
Humidity	Non-condensing	--	95	% RH
Weight		0.75	--	g
Dimensions (L x W x H)	0.47 x 0.47 x 0.18 inches, 12.00 x 12.00 x 4.50mm			
MTBF	MIL-HDBK -217F, t=+25°C	2000	--	KHrs

## Safety Specifications


### Parameters

Standards	Designed to meet EN 62368	
	EMC - Conducted and radiated emission	CISPR32/EN55032, CLASS B with recommended circuit
	Electrostatic Discharge Immunity	IEC 61000-4-2, Contact $\pm 4\text{KV}$ , Criteria B
	RF, Electromagnetic Field Immunity	IEC 61000-4-3, 10V/m, Criteria A
	Electrical Fast Transient/Burst Immunity	IEC 61000-4-4, $\pm 1\text{KV}$ , Criteria B
	Surge Immunity	IEC 61000-4-5, line to line $\pm 1\text{KV}$ , Criteria B
	RF, Conducted Disturbance Immunity	IEC 61000-4-6, 3Vr.m.s, Criteria A


## Derating




Free air Convection

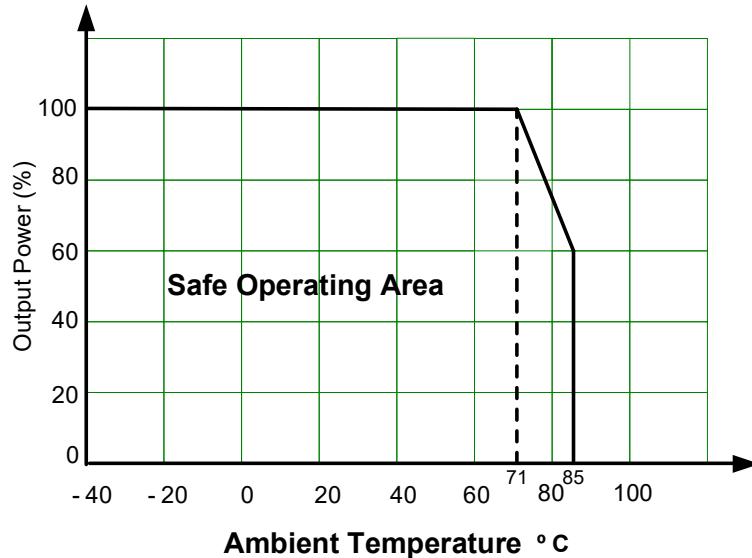

## Typical Application Circuit

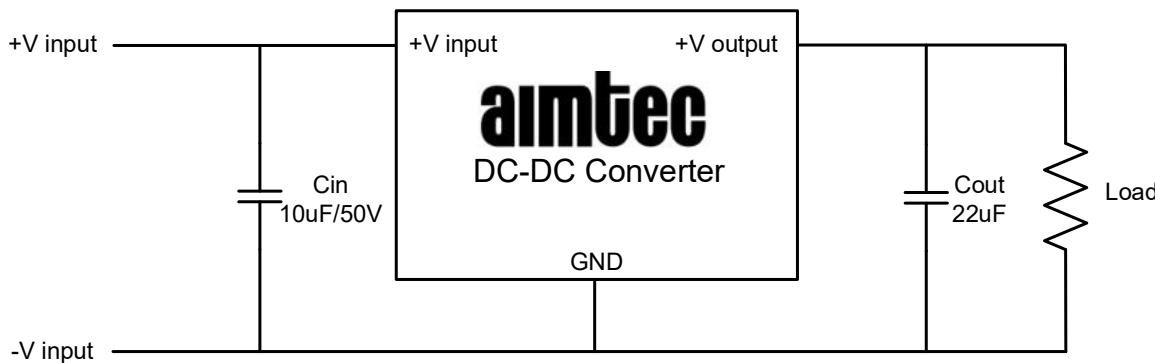


## EMC Recommended Circuit

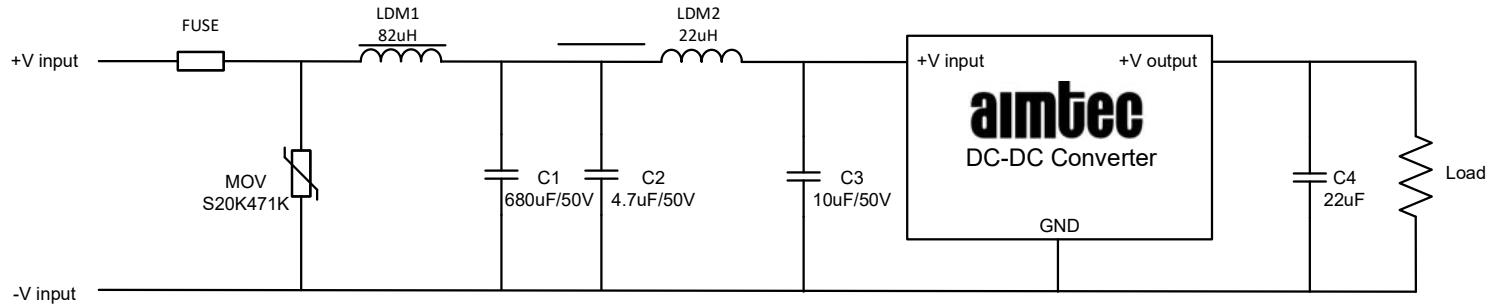


Fuse : Choose according to actual input current.

## Dimensions


### Top View

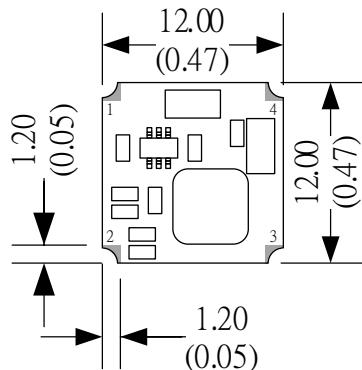

### Right View

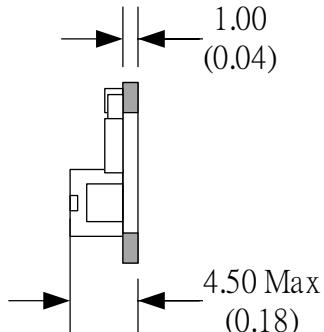

### Bottom View


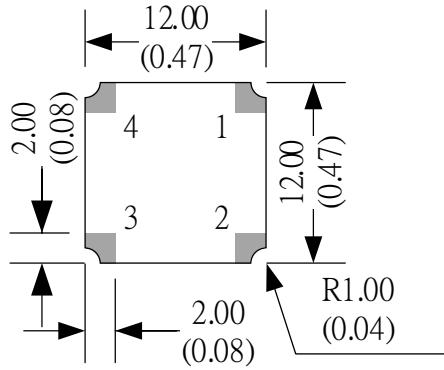


### Notes:



All dimensions are typical in millimeters (inches).  
General tolerance  $\pm 0.25$  ( $\pm 0.01$ )

Pin Out Specifications	
Pin	Function
1	+V Input
2	NC
3	+V Output
4	GND

## Packing Information

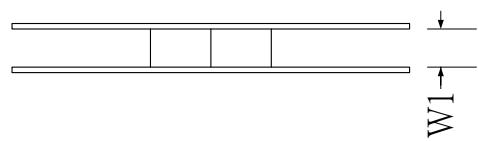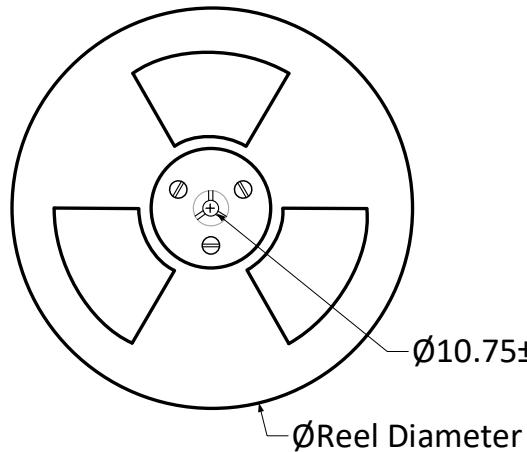

User feeding direction

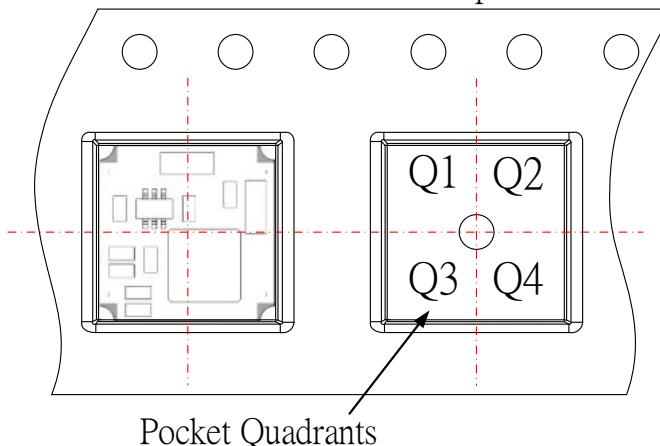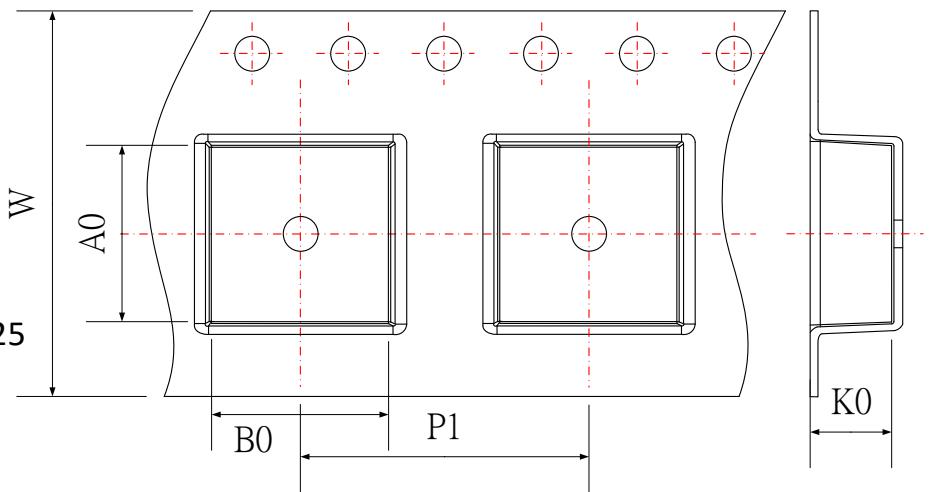

Device	Package Type	Pin	MPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0	B0	K0	P1	W	P1 Quadrant
AMSROL-78EZ Series	SMD	4	700	330.0	24.4	14.4	14.4	4.6	20.0	24.0	Q1

**NOTE:** 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to [www.aimtec.com](http://www.aimtec.com) for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at [www.aimtec.com](http://www.aimtec.com).