




Retroreflective sensor OBR50M-R300-2PP-V1



- Pulse Ranging Technology (PRT)
- Optimized for use with fixed reflectors
- Good alignability due to red transmission LED
- Reliable detection of reflecting metal objects
- Simple operation with only one TEACH-IN button

Retroreflective sensor



Function

The sensors in the R300 series represent a versatile product line and adopt various functional principles. All sensors operate using proven Pulse Ranging Technology (PRT) and are characterized by high sensing ranges and detection ranges. Contained within the compact housing of the 28 series of light barriers, the R300 offers all of the properties of PRT such as maximum reliability when detecting objects and immunity against ambient light and cross-talk. To achieve this, the sensors in the R300 series make use of a number of different kinds of measurement data. What's more, the sensors are equipped with red light that is safe for the human eye as standard, making it easier to align the devices, even across expansive work areas. These features, combined with an innovative and intuitive operating concept, provide solutions for conventional automation tasks delivering the highest level of performance.

Technical Data




Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Release date: 2023-03-28 Date of issue: 2023-03-28 Filename: 254271_eng.pdf

Technical Data

Ripple		10 % within the supply tolerance
No-load supply current	I_0	$\leq 80 \text{ mA} / 24 \text{ V DC}$
Time delay before availability	t_v	$< 0.7 \text{ s}$, for temperatures $< -30^\circ\text{C}$ compliance of the specification 5 mins after power on
Output		
Switching type		Q - Pin4: NPN normally open / dark-on, PNP normally closed / light-on /Q - Pin2: NPN normally closed / light-on, PNP normally open / dark-on
Signal output		2 push-pull (4 in 1) outputs, short-circuit protected, reverse polarity protected
Switching voltage		max. 30 V DC
Switching current		max. 100 mA
Switching frequency	f	50 Hz
Response time		5 ms
Conformity		
Product standard		EN 60947-5-2
Approvals and certificates		
UL approval		E87056 , cULus Listed , class 2 power supply , type rating 1
Ambient conditions		
Ambient temperature		$-40 \dots 55^\circ\text{C}$ ($-40 \dots 131^\circ\text{F}$)
Storage temperature		$-40 \dots 70^\circ\text{C}$ ($-40 \dots 158^\circ\text{F}$)
Mechanical specifications		
Housing width		25.8 mm
Housing height		88 mm
Housing depth		54.3 mm
Degree of protection		IP67
Connection		4-pin, M12 x 1 connector
Material		
Housing		Plastic ABS
Optical face		PMMA
Mass		90 g


Connection



Connection

Connect the device as set out in the connection diagram.

Connection Assignment




Connection Assignment

Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)

Assembly

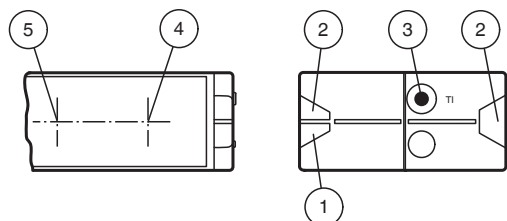

1	Operating indicator	Green
2	Signal indicator	Yellow
3	Teach-in button	
4	Transmitter	
5	Receiver	

Installation

Installation Note

A pressure equalization membrane is fitted on the sensor nameplate. When mounting, make sure that the pressure equalization membrane is not sealed off.

Mounting

The sensors can be secured directly using thru-holes or using a mounting bracket or mounting clamp. Mounting brackets and clamping elements are available as accessories.

Ensure that the background is level to prevent the housing from becoming distorted when the fittings are tightened.


Secure the nut and screw with spring disks to prevent the sensor from becoming misaligned.

Adjustment

The green LED lights up when the operating voltage is applied.

Adjust the sensor so that the light spot is on the center of the reflector. The yellow sensor LEDs light up.

Characteristic Curve

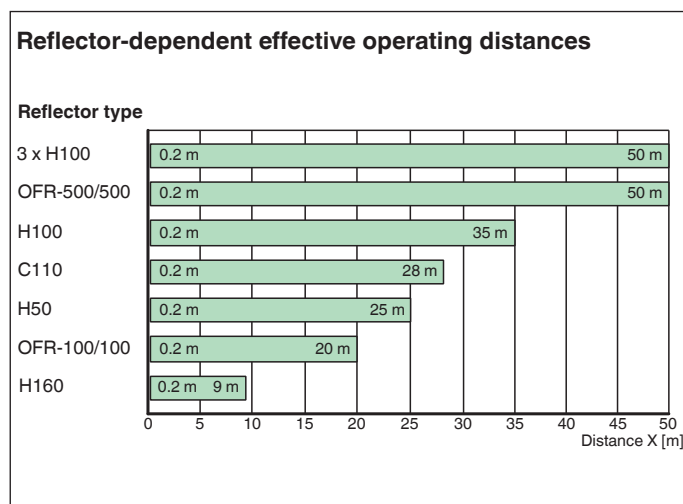

Teach-In

To ensure reliable functionality, save the position of the reflector by using the Teach-in procedure.












- Press the "TI" button (for approx. 2 s) until the yellow and green LEDs flash in phase.
- Teach-in begins once the "TI" button is released.
- **Teach-in successful:** Yellow and green LEDs flash alternately (2.5 Hz). After successful Teach-in, the output and LED change their status.
- **Teach-in unsuccessful:** Yellow and green LEDs flash alternately very quickly (8 Hz). After an unsuccessful Teach-in, the sensor continues to operate with the previous valid setting after the relevant visual fault signal is issued.

Every taught-in reflector position can be retaught (overwritten) by pressing the "TI" button again.

Deleting Taught-in Reflector Position

- To delete a taught-in reflector position, press and hold the "TI" button for > 4 s until the yellow and green LEDs go out.
- Release the "TI" button. The saved reflector position is deleted. The yellow and green lights will flash alternately (2.5 Hz) to confirm that the deletion has occurred.

Accessories

	OMH-05	Mounting aid for round steel ø 12 mm or sheet 1.5 mm ... 3 mm
	OMH-07-01	Mounting aid for round steel ø 12 mm or sheet 1.5 mm ... 3 mm
	OMH-21	Mounting bracket: mounting aid for sensors in the RL* series
	OMH-22	Mounting aid for RL* series
	OMH-VDM28-01	Metal enclosure for inserting protective panes or apertures
	OMH-VDM28-02	Mounting and fine adjustment device for sensors from the 28 series
	OMH-RLK29-HW	Mounting bracket for rear wall mounting
	OMH-K01	dove tail mounting clamp
	OMH-K03	dove tail mounting clamp
	V1-G-2M-PUR	Female cordset single-ended M12 straight A-coded, 4-pin, PUR cable grey
	V1-W-2M-PUR	Female cordset single-ended M12 angled A-coded, 4-pin, PUR cable grey