




Laser retroreflective sensor OBR12M-R101-2EP-IO-V31-L



- Miniature design with versatile mounting options
- DuraBeam Laser Sensors - durable and employable like an LED
- Extended temperature range
-40 °C ... 60 °C
- High degree of protection IP69K
- IO-Link interface for service and process data

Laser retroreflective sensor



IO-Link


Function

The miniature optical sensors are the first devices of their kind to offer an end-to- end solution in a small single standard design — from thru-beam sensor through to a distance measurement device. As a result of this design, the sensors are able to perform practically all standard automation tasks.

The DuraBeam laser sensors are durable and can be used in the same way as a standard sensor.

The use of Multi Pixel Technology gives the standard sensors a high level of flexibility and enables them to adapt more effectively to their operating environment.

Dimensions

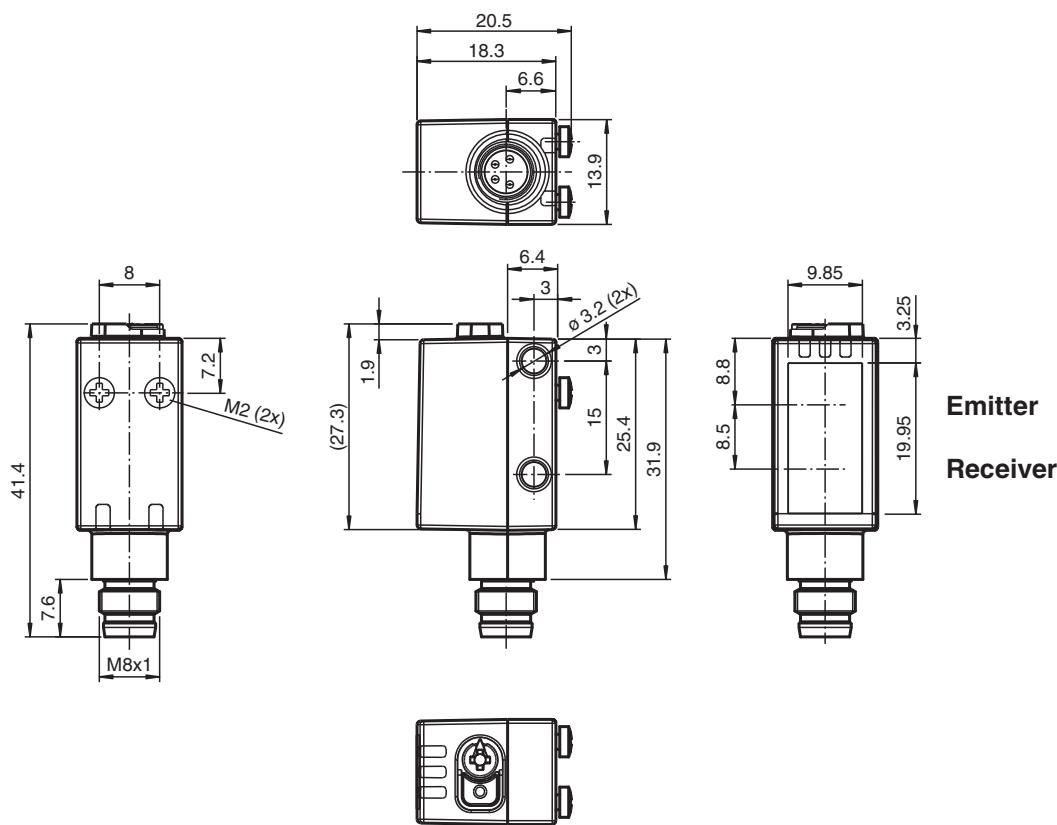

Release date: 2023-04-04 Date of issue: 2023-04-04 Filename: 267075-0122_eng.pdf

Technical Data

General specifications

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS


Technical Data

| | |
|---|---|
| Effective detection range | 0 ... 12 m |
| Reflector distance | 0.2 ... 12 m |
| Threshold detection range | 15 m |
| Reference target | H50 reflector |
| Light source | laser diode |
| Light type | modulated visible red light |
| Polarization filter | yes |
| Laser nominal ratings | |
| Note | LASER LIGHT , DO NOT STARE INTO BEAM |
| Laser class | 1 |
| Wave length | 680 nm |
| Beam divergence | > 5 mrad d63 < 2 mm in the range of 250 mm ... 750 mm |
| Pulse length | 1.6 µs |
| Repetition rate | max. 17.6 kHz |
| max. pulse energy | 9.6 nJ |
| Diameter of the light spot | approx. 30 mm at a distance of 12 m |
| Opening angle | approx. 0.3 ° |
| Ambient light limit | EN 60947-5-2 |
| Functional safety related parameters | |
| MTTF _d | 672 a |
| Mission Time (T _M) | 20 a |
| Diagnostic Coverage (DC) | 0 % |
| Indicators/operating means | |
| Operation indicator | LED green: constantly on - power on flashing (4Hz) - short circuit flashing with short break (1 Hz) - IO-Link mode |
| Function indicator | Yellow LED: Permanently lit - light path clear Permanently off - object detected Flashing (4 Hz) - insufficient operating reserve |
| Control elements | Light-on/dark-on changeover switch |
| Control elements | sensitivity adjustment |
| Parameterization indicator | IO link communication: green LED goes out briefly (1 Hz) |
| Electrical specifications | |
| Operating voltage | U _B 10 ... 30 V DC |
| Ripple | max. 10 % |
| No-load supply current | I ₀ < 20 mA at 24 V supply voltage |
| Protection class | III |
| Interface | |
| Interface type | IO-Link (via C/Q = pin 4) |
| IO-Link revision | 1.1 |
| Device ID | 0x110202 (1114626) |
| Transfer rate | COM2 (38.4 kBit/s) |
| Min. cycle time | 2.3 ms |
| Process data width | Process data input 2 Bit Process data output 2 Bit |
| SIO mode support | yes |
| Compatible master port type | A |
| Output | |
| Switching type | The switching type of the sensor is adjustable. The default setting is: C/Q - Pin4: NPN normally open / dark-on, PNP normally closed / light-on, IO-Link /Q - Pin2: NPN normally closed / light-on, PNP normally open / dark-on |
| Signal output | 2 push-pull (4 in 1) outputs, short-circuit protected, reverse polarity protected, overvoltage protected |
| Switching voltage | max. 30 V DC |
| Switching current | max. 100 mA , resistive load |

Technical Data

| | |
|-----------------------------------|--|
| Usage category | DC-12 and DC-13 |
| Voltage drop | $U_d \leq 1.5 \text{ V DC}$ |
| Switching frequency | f 2000 Hz |
| Response time | 250 μs |
| Conformity | |
| Communication interface | IEC 61131-9 |
| Product standard | EN 60947-5-2 |
| Laser safety | EN 60825-1:2014 |
| Approvals and certificates | |
| UL approval | E87056, cULus Listed, class 2 power supply, type rating 1 |
| FDA approval | IEC 60825-1:2007 Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007 |
| Ambient conditions | |
| Ambient temperature | -40 ... 60 °C (-40 ... 140 °F) |
| Storage temperature | -40 ... 70 °C (-40 ... 158 °F) |
| Mechanical specifications | |
| Housing width | 13.9 mm |
| Housing height | 41.4 mm |
| Housing depth | 18.3 mm |
| Degree of protection | IP67 / IP69 / IP69K |
| Connection | M8 x 1 connector, 4-pin |
| Material | |
| Housing | PC (Polycarbonate) |
| Optical face | PMMA |
| Mass | approx. 10 g |


Connection



Wire colors in accordance with EN 60947-5-2

| | | |
|---|----|---------|
| 1 | BN | (brown) |
| 2 | WH | (white) |
| 3 | BU | (blue) |
| 4 | BK | (black) |


Assembly




| | |
|---|------------------------------------|
| 1 | Light-on/dark-on changeover switch |
| 2 | Sensitivity adjuster |
| 3 | Operating indicator / dark on |
| 4 | Signal indicator |
| 5 | Operating indicator / light on |

Characteristic Curve


Characteristic response curve

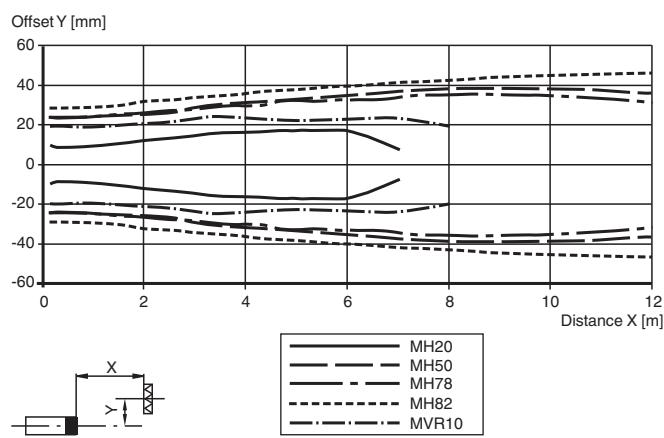

Relative received light strength

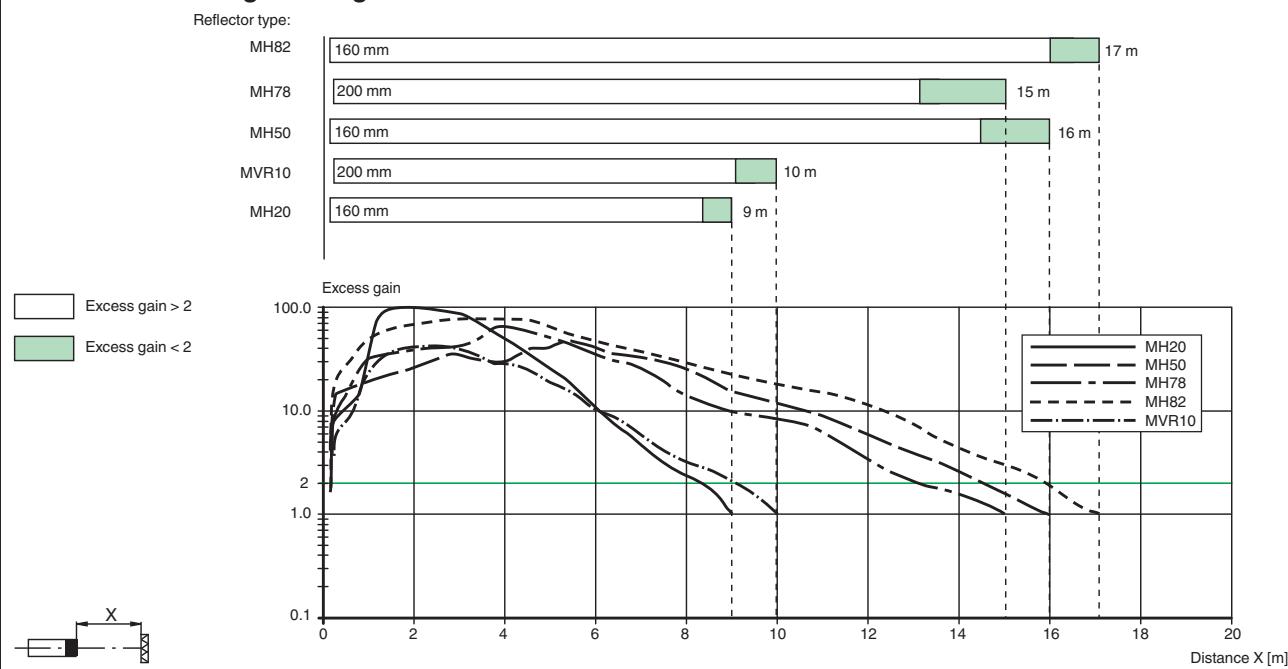

Safety Information

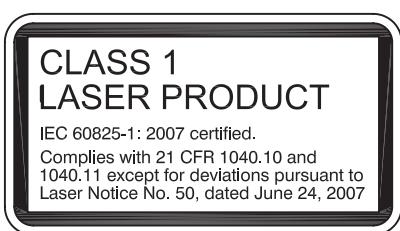


Accessories

| | | |
|--|-----------------------|---|
| | REF-MH50 | Reflector with Micro-structure, rectangular 50.9 mm x 50.9 mm, mounting holes, fixing strap |
| | OMH-R101 | Mounting Clamp |
| | OMH-R101-Front | Mounting Clamp |
| | OMH-4.1 | Mounting Clamp |
| | OMH-ML6 | Mounting bracket |
| | OMH-ML6-U | Mounting bracket |
| | OMH-ML6-Z | Mounting bracket |
| | REF-MH82 | Reflector with Micro-structure, rectangular 82 mm x 60 mm, mounting holes |
| | REF-MH20 | Reflector with Micro-structure, rectangular 32 mm x 20 mm, mounting holes |
| | REF-MVR10 | Reflector with Micro-structure, rectangular 60 mm x 19 mm, mounting holes |
| | V31-GM-2M-PUR | Female cordset single-ended M8 straight A-coded, 4-pin, PUR cable grey |

Accessories

| | | |
|---|-----------------------------|--|
|  | V31-WM-2M-PUR | Female cordset single-ended M8 angled A-coded, 4-pin, PUR cable grey |
|  | ICE2-8IOL-G65L-V1D | EtherNet/IP IO-Link master with 8 inputs/outputs |
|  | ICE3-8IOL-G65L-V1D | PROFINET IO IO-Link master with 8 inputs/outputs |
|  | ICE1-8IOL-G30L-V1D | Ethernet IO-Link module with 8 inputs/outputs |
|  | ICE1-8IOL-G60L-V1D | Ethernet IO-Link module with 8 inputs/outputs |
|  | ICE2-8IOL-K45P-RJ45 | EtherNet/IP IO-Link master with 8 inputs/outputs, DIN rail, push-in connectors |
|  | ICE2-8IOL-K45S-RJ45 | EtherNet/IP IO-Link master with 8 inputs/outputs, DIN rail, screw terminal |
|  | ICE3-8IOL-K45P-RJ45 | PROFINET IO IO-Link master with 8 inputs/outputs, DIN rail, push-in terminals |
|  | ICE3-8IOL-K45S-RJ45 | PROFINET IO IO-Link master with 8 inputs/outputs, DIN rail, screw terminal |
|  | IO-Link-Master02-USB | IO-Link master, supply via USB port or separate power supply, LED indicators, M12 plug for sensor connection |

Configuration

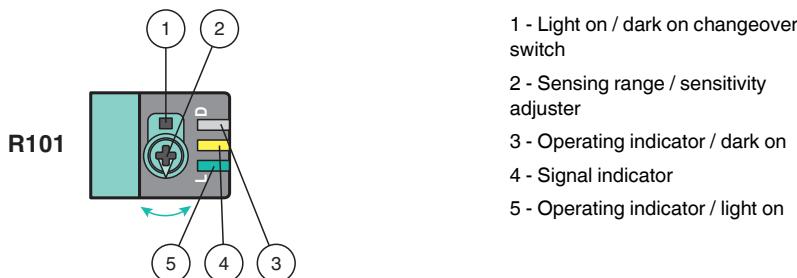

To unlock the adjustment functions turn the sensing range adjuster for more than 180 degrees.

Sensing Range / Sensitivity

Turn sensing range / sensitivity adjuster clockwise to increase sensing range / sensitivity.

Turn sensing range /sensitivity adjuster counterclockwise to decrease sensing range / sensitivity.

If the end of the adjustment range is reached, the signal indicator starts flashing with 8 Hz.

Light on / Dark on Configuration

Press the light on / dark on changeover switch for more than 1 second (less than 4 seconds). The light on / dark on mode changes and the operating indicators are activated accordingly.

If you press the light on / dark on changeover switch for more than 4 seconds, the light on / dark on mode changes back to the original setting. On release of the light on / dark on changeover switch the current state is activated.

Restore Factory Settings

Press the light on / dark on changeover switch for more than 10 seconds (less than 30 seconds) until all LEDs turn off. On release of the light on / dark on changeover switch the signal indicator turns on. After 5 seconds the sensor resumes operation with factory settings.

After 5 minutes of inactivity the sensing range / sensitivity adjustment is locked. In order to reactivate the sensing range / sensitivity adjustment, turn the sensing range / sensitivity adjuster for more than 180 degrees.