



## Laser retroreflective sensor OBR12M-R100-EP-IO-V3-L



- Miniature design with versatile mounting options
- DuraBeam Laser Sensors - durable and employable like an LED
- Extended temperature range  
-40 °C ... 60 °C
- High degree of protection IP69K
- IO-Link interface for service and process data

### Laser retroreflective sensor



# IO-Link

### Function


The R100 series miniature optical sensors are the first devices of their kind to offer an end-to-end solution in a small standard design — from thru-beam sensor through to a distance measurement device. As a result of this design, the sensors are able to perform practically all standard automation tasks.

The entire series enables sensors to communicate via IO-Link.

The DuraBeam laser sensors are durable and can be used in the same way as a standard sensor.

The use of Multi Pixel Technology gives the standard sensors a high level of flexibility and enables them to adapt more effectively to their operating environment.

## Dimensions

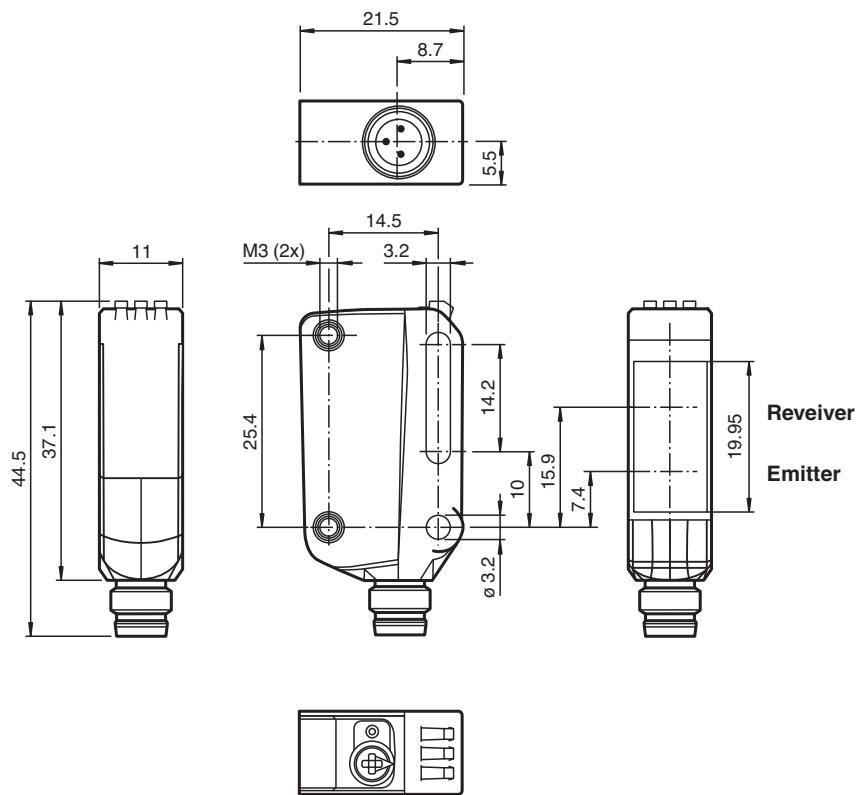

## Technical Data

Release date: 2025-01-17 Date of issue: 2025-01-17 Filename: 260705-100030\_eng.pdf

### General specifications

Effective detection range	0 ... 12 m
Reflector distance	0.2 ... 12 m
Threshold detection range	15 m
Reference target	H50 reflector
Light source	laser diode
Light type	modulated visible red light
Polarization filter	yes
Laser nominal ratings	
Note	LASER LIGHT , DO NOT STARE INTO BEAM
Laser class	1
Wave length	680 nm
Beam divergence	> 5 mrad d63 < 2 mm in the range of 250 mm ... 750 mm
Pulse length	1.6 µs
Repetition rate	max. 17.6 kHz
max. pulse energy	9.6 nJ
Diameter of the light spot	approx. 30 mm at a distance of 12 m
Opening angle	approx. 0.3 °
Ambient light limit	EN 60947-5-2

### Functional safety related parameters

MTTF <sub>d</sub>	672 a
Mission Time (T <sub>M</sub> )	20 a

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

 PEPPERL+FUCHS


## Technical Data

Diagnostic Coverage (DC)			0 %
<b>Indicators/operating means</b>			
Operation indicator			LED green: constantly on - power on flashing (4Hz) - short circuit flashing with short break (1 Hz) - IO-Link mode
Function indicator			Yellow LED: Permanently lit - light path clear Permanently off - object detected Flashing (4 Hz) - insufficient operating reserve
Control elements			Light-on/dark-on changeover switch
Control elements			sensitivity adjustment
Parameterization indicator			IO link communication: green LED goes out briefly (1 Hz)
<b>Electrical specifications</b>			
Operating voltage	$U_B$	10 ... 30 V DC	
Ripple		max. 10 %	
No-load supply current	$I_0$	< 20 mA at 24 V supply voltage	
Protection class		III	
<b>Interface</b>			
Interface type		IO-Link ( via C/Q = pin 4 )	
IO-Link revision		1.1	
Device ID		0x110202 (1114626)	
Transfer rate		COM2 (38.4 kBit/s)	
Min. cycle time		2.3 ms	
Process data width		Process data input 2 Bit Process data output 2 Bit	
SIO mode support		yes	
Compatible master port type		A	
<b>Output</b>			
Switching type		The switching type of the sensor is adjustable. The default setting is: C/Q - Pin4: NPN normally open / dark-on, PNP normally closed / light-on, IO-Link	
Signal output		1 push-pull (4 in 1) output, short-circuit protected, reverse polarity protected, overvoltage protected	
Switching voltage		max. 30 V DC	
Switching current		max. 100 mA, resistive load	
Usage category		DC-12 and DC-13	
Voltage drop	$U_d$	$\leq 1.5$ V DC	
Switching frequency	$f$	2000 Hz	
Response time		250 $\mu$ s	
<b>Conformity</b>			
Communication interface		IEC 61131-9	
Product standard		EN 60947-5-2	
Laser safety		EN 60825-1:2014	
<b>Approvals and certificates</b>			
UL approval		E87056, cULus Listed, class 2 power supply, type rating 1	
FDA approval		IEC 60825-1:2014 Complies with 21 CFR 1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed. 3 as described in Laser Notice 56, dated May 8, 2019.	
<b>Ambient conditions</b>			
Ambient temperature		-40 ... 60 °C (-40 ... 140 °F)	
Storage temperature		-40 ... 70 °C (-40 ... 158 °F)	
<b>Mechanical specifications</b>			
Degree of protection		IP67 / IP69 / IP69K	
Connection		M8 x 1 connector, 3-pin	
Material			
Housing		PC (Polycarbonate)	


## Technical Data

Optical face	PMMA
Mass	approx. 10 g
Dimensions	
Height	44.5 mm
Width	11 mm
Depth	21.5 mm

## Connection



## Connection Assignment




Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
3	BU	(blue)
4	BK	(black)

## Assembly


Release date: 2025-01-17 Date of issue: 2025-01-17 Filename: 267075-100030\_eng.pdf

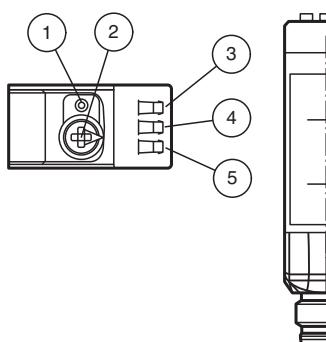


1	Light-on/Dark-on changeover switch
2	Sensitivity adjuster
3	Operating indicator / dark on
4	Signal indicator
5	Operating indicator / light on

## Characteristic Curve


### Characteristic response curve

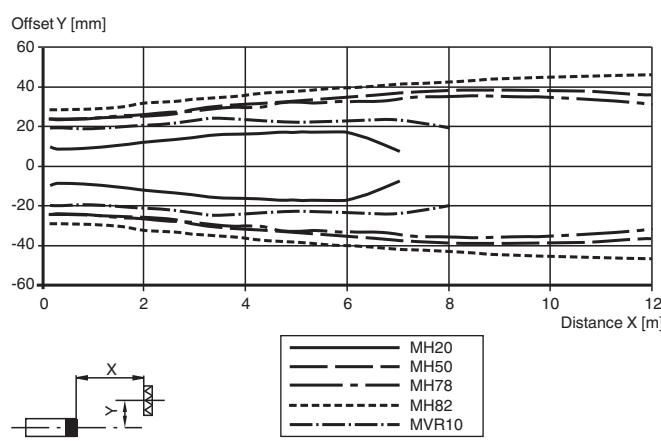


### Relative received light strength

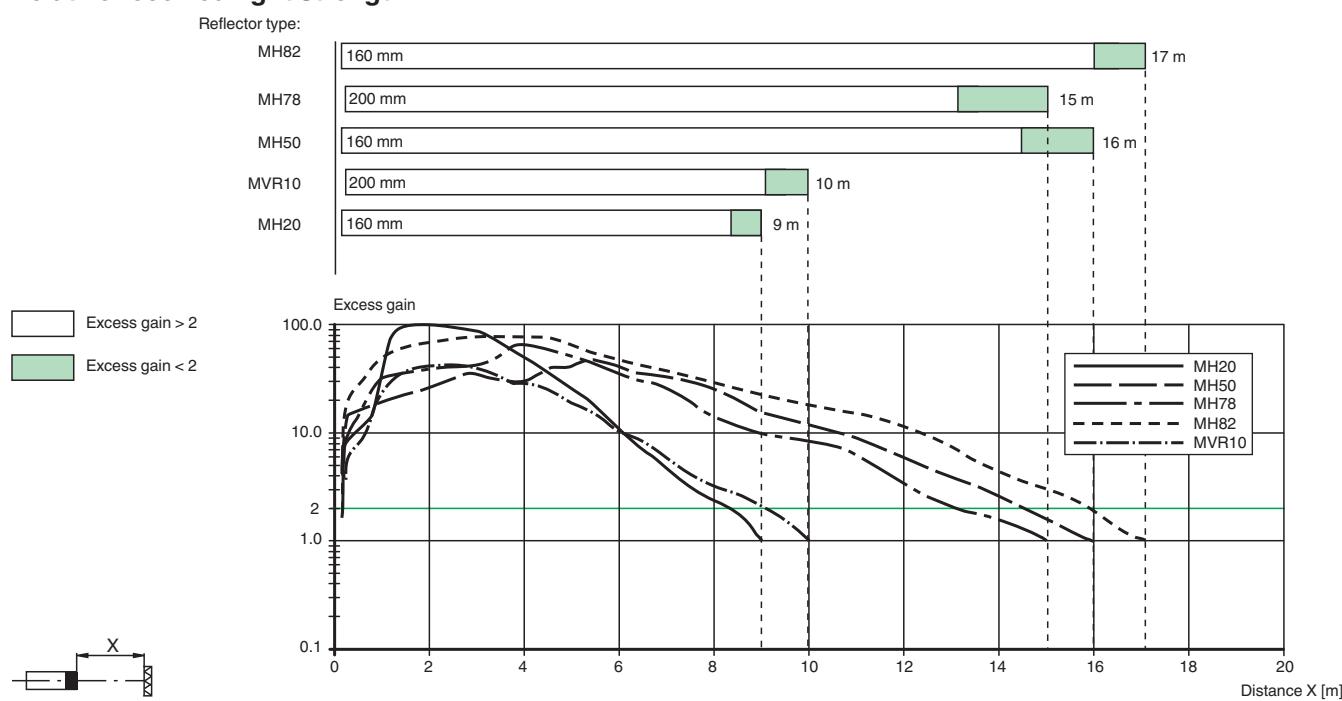

## Safety Information

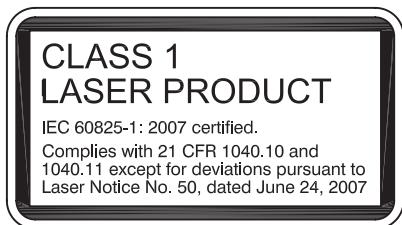

## Configuration



- 1 - Light-on / dark-on changeover switch
- 2 - Sensing range / sensitivity adjuster
- 3 - Operating indicator / dark on
- 4 - Signal indicator
- 5 - Operating indicator / light on

To unlock the adjustment functions turn the sensing range /sensitivity adjuster for more than 180 degrees.

### Sensing Range / Sensitivity

Turn sensing range / sensitivity adjuster clockwise to increase sensing range / sensitivity.

Turn sensing range / sensitivity adjuster counter clockwise to decrease sensing range / sensitivity.

If the end of the adjustment range is reached, the signal indicator starts flashing with 8 Hz.

### Light-on / Dark-on Configuration

Press the light-on / dark-on changeover switch for more than 1 second (less than 4 seconds). The light-on / dark-on mode changes and the operating indicators are activated accordingly.

If you press the light-on / dark-on changeover switch for more than 4 seconds, the light-on /dark-on mode changes back to the original setting. On release of the light-on / dark-on changeover switch the current state is activated.

### Restore Factory Settings

Press the light-on / dark-on changeover switch for more than 10 seconds (less than 30 seconds) until all LEDs turn off. On release of the light-on / dark-on changeover switch the signal indicator turns on. After 5 seconds the sensor resumes operation with factory default settings.

After 5 minutes of inactivity the sensing range / sensitivity adjustment is locked. In order to reactivate the sensing range / sensitivity adjustment, turn the sensing range /sensitivity adjuster for more than 180 degrees.