



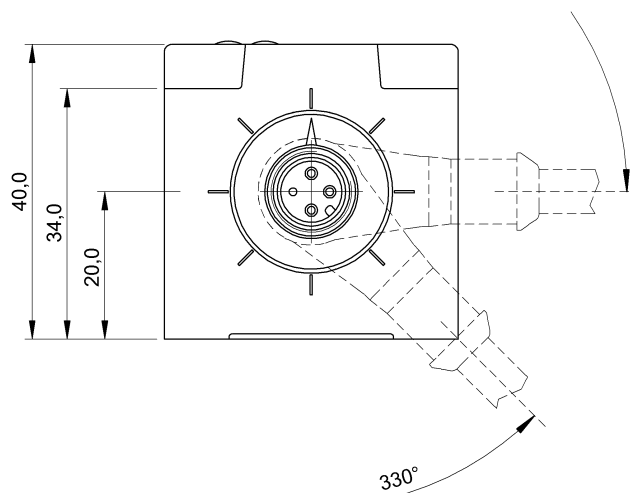

1) Sensing surface

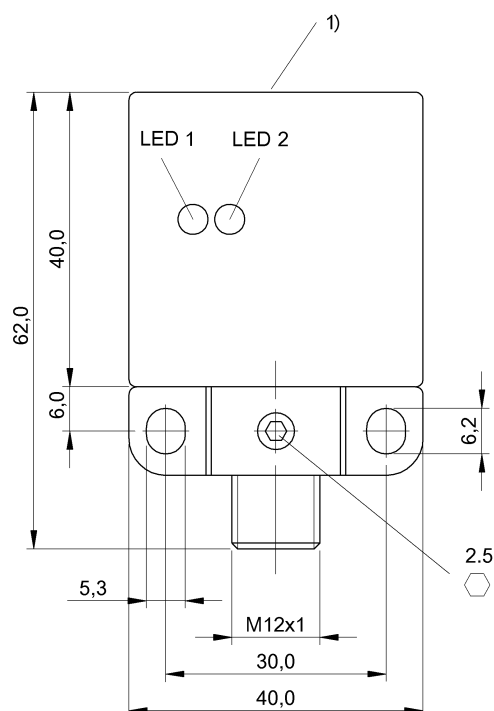

## Basic features

|                     |                             |
|---------------------|-----------------------------|
| Approval/Conformity | CE<br>UKCA<br>cULus<br>WEEE |
| Basic standard      | IEC 60947-5-2               |
| Trademark           | Global                      |

## Display/Operation

|                    |     |
|--------------------|-----|
| Function indicator | yes |
| Power indicator    | yes |

## Electrical connection

|                                   |                            |
|-----------------------------------|----------------------------|
| Connection                        | M12x1-Male, 4-pin, A-coded |
| Polarity reversal protected       | yes                        |
| Protection against device mix-ups | yes                        |
| Short-circuit protection          | yes                        |

## Electrical data

|                                   |               |
|-----------------------------------|---------------|
| Load capacitance max. at Ue       | 1 $\mu$ F     |
| Min. operating current Im         | 0 mA          |
| No-load current Io max., damped   | 20 mA         |
| No-load current Io max., undamped | 15 mA         |
| Operating voltage Ub              | 10...30 VDC   |
| Output resistance Ra              | 33.0 kOhm + D |
| Protection class                  | II            |
| Rated insulation voltage Ui       | 250 V AC      |
| Rated operating current Ie        | 200 mA        |
| Rated operating voltage Ue DC     | 24 V          |
| Rated short circuit current       | 100 A         |
| Ready delay tv max.               | 30 ms         |
| Residual current Ir max.          | 80 $\mu$ A    |
| Ripple max. (% of Ue)             | 15 %          |
| Switching frequency               | 50 Hz         |
| Utilization category              | DC -13        |
| Voltage drop static max.          | 2.5 V         |

Inductive Sensors  
**BES Q40KFU-NAC25F-S04G**  
Order Code: BES022J

**BALLUFF**

Environmental conditions

|                         |                                       |
|-------------------------|---------------------------------------|
| Ambient temperature     | -25...70 °C                           |
| Contamination scale     | 3                                     |
| EN 60068-2-27, Shock    | Half-sinus, 30 g <sub>n</sub> , 11 ms |
| EN 60068-2-6, Vibration | 55 Hz, amplitude 1 mm, 3x30 min       |
| IP rating               | IP67                                  |

Functional safety

|              |       |
|--------------|-------|
| MTTF (40 °C) | 230 a |
|--------------|-------|

Interface

|                  |                                           |
|------------------|-------------------------------------------|
| Switching output | NPN normally open/normally closed (NO/NC) |
|------------------|-------------------------------------------|

Material

|                          |     |
|--------------------------|-----|
| Housing material         | PBT |
| Material sensing surface | PBT |

Remarks

LED 1: Function  
LED 2: Operating voltage  
The sensor is functional again after the overload has been eliminated.  
For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings



Wiring Diagrams

