



## Diffuse mode sensor OBD800-R103-2EP-IO-0,3M-V31



- Miniature design with versatile mounting options
- Extended temperature range  
-40 °C ... 60 °C
- High degree of protection IP69K
- IO-Link interface for service and process data

### Diffuse mode sensor



# IO-Link

### Function


The R103 series miniature optical sensors are the first devices of their kind to offer an end-to-end solution in a small standard design — from thru-beam sensor through to a distance measurement device. As a result of this design, the sensors are able to perform practically all standard automation tasks.

The entire series enables sensors to communicate via IO-Link.

The DuraBeam laser sensors are durable and can be used in the same way as a standard sensor.

The use of Multi Pixel Technology gives the standard sensors a high level of flexibility and enables them to adapt more effectively to their operating environment.

## Dimensions

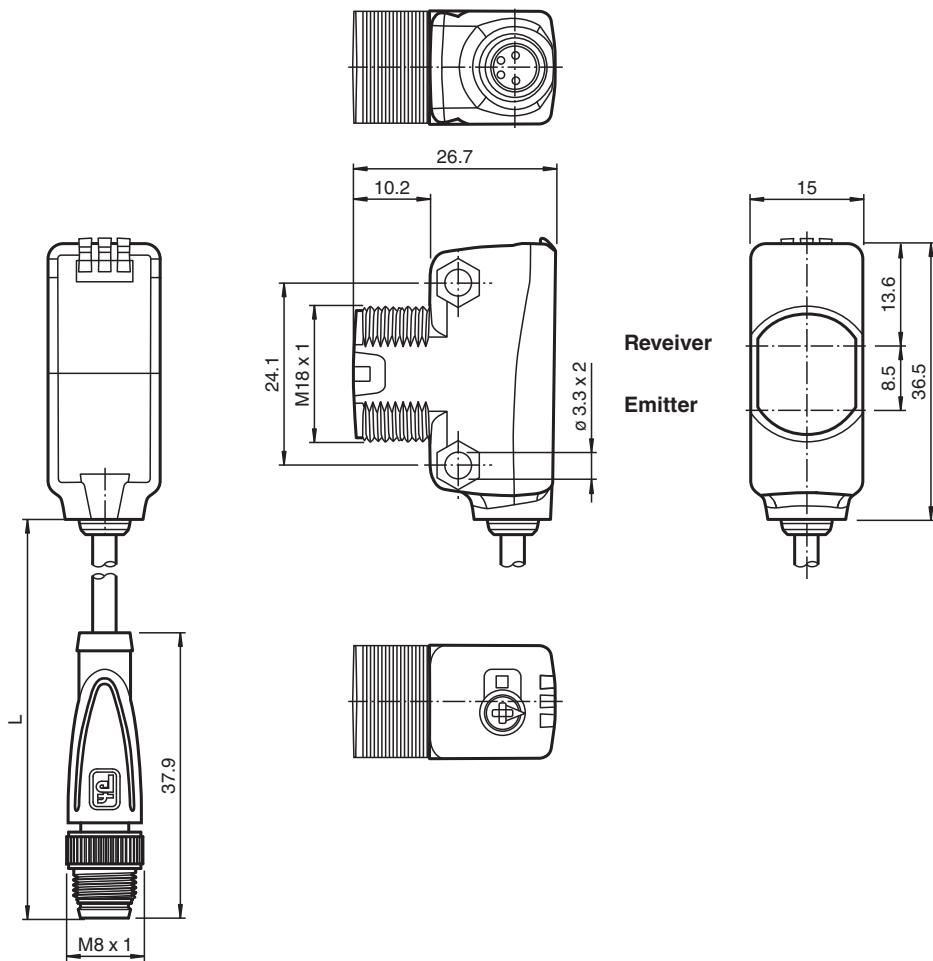

## Technical Data

### General specifications

Detection range	2 ... 800 mm
Detection range min.	20 ... 40 mm
Adjustment range	40 ... 800 mm
Reference target	standard white, 100 mm x 100 mm
Light source	LED
Light type	modulated visible red light
LED risk group labelling	exempt group
Diameter of the light spot	approx. 55 mm at a distance of 800 mm
Opening angle	3.7 °
Ambient light limit	EN 60947-5-2

### Functional safety related parameters

MTTF <sub>d</sub>	724 a
Mission Time (T <sub>M</sub> )	20 a
Diagnostic Coverage (DC)	0 %


### Indicators/operating means

Operation indicator	LED green: constantly on - power on flashing (4Hz) - short circuit flashing with short break (1 Hz) - IO-Link mode
Function indicator	LED yellow: constantly on - object detected constantly off - object not detected
Control elements	Light-on/dark-on changeover switch

## Technical Data

Control elements			sensitivity adjustment
<b>Electrical specifications</b>			
Operating voltage	$U_B$	10 ... 30 V DC	
Ripple		max. 10 %	
No-load supply current	$I_0$	< 25 mA at 24 V supply voltage	
Protection class		III	
<b>Interface</b>			
Interface type		IO-Link ( via C = pin 4 )	
IO-Link revision		1.1	
Device ID		0x110103 (1114371)	
Transfer rate		COM2 (38.4 kBIt/s)	
Min. cycle time		2.3 ms	
Process data width		Process data input 1 Bit Process data output 2 Bit	
SIO mode support		yes	
Compatible master port type		A	
<b>Output</b>			
Switching type		The switching type of the sensor is adjustable. The default setting is: C/Q - Pin4: NPN normally open / light-on, PNP normally closed / dark-on, IO-Link /Q - Pin2: NPN normally closed / dark-on, PNP normally open / light-on	
Signal output		2 push-pull (4 in 1) outputs, short-circuit protected, reverse polarity protected, overvoltage protected	
Switching voltage		max. 30 V DC	
Switching current		max. 100 mA, resistive load	
Usage category		DC-12 and DC-13	
Voltage drop	$U_d$	$\leq 1.5$ V DC	
Switching frequency	$f$	1000 Hz	
Response time		0.5 ms	
<b>Conformity</b>			
Communication interface		IEC 61131-9	
Product standard		EN 60947-5-2	
<b>Approvals and certificates</b>			
UL approval		E87056, cULus Listed, class 2 power supply, type rating 1	
<b>Ambient conditions</b>			
Ambient temperature		-40 ... 60 °C (-40 ... 140 °F), fixed cable -25 ... 60 °C (-13 ... 140 °F), movable cable not appropriate for conveyor chains	
Storage temperature		-40 ... 70 °C (-40 ... 158 °F)	
<b>Mechanical specifications</b>			
Housing width		15 mm	
Housing height		36.5 mm	
Housing depth		26.7 mm	
Degree of protection		IP67 / IP69 / IP69K	
Connection		fixed cable 300 mm with M8 x 1 male connector; 4-pin	
Material			
Housing		PC (Polycarbonate)	
Optical face		PMMA	
Mass		approx. 17 g	
Cable length		0.3 m	

## Connection

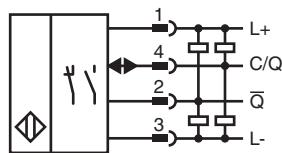


## Connection Assignment



Wire colors in accordance with EN 60947-5-2


1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)

## Assembly

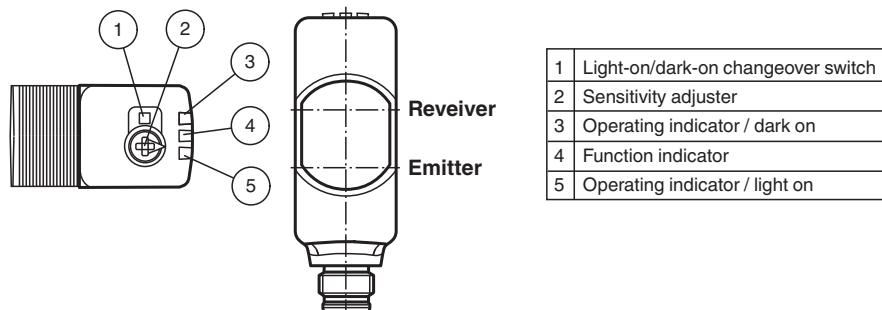


## Characteristic Curve


### Characteristic response curve

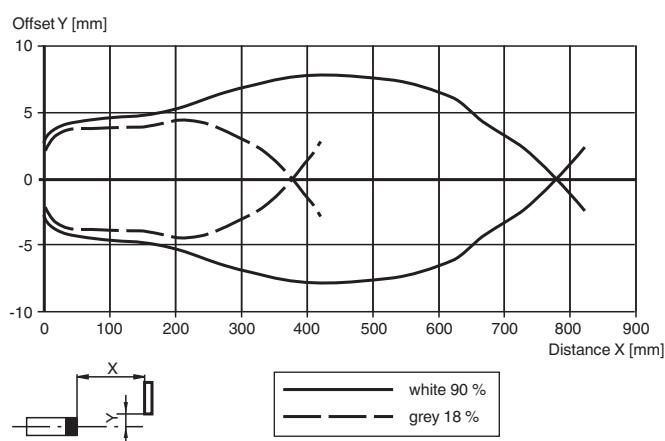


### Relative received light strength

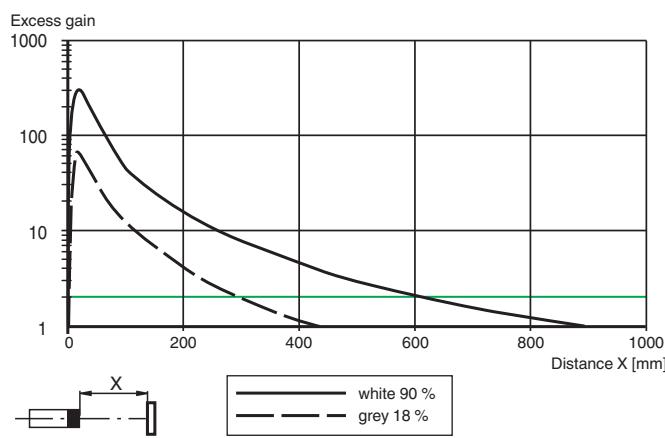

### Detection ranges

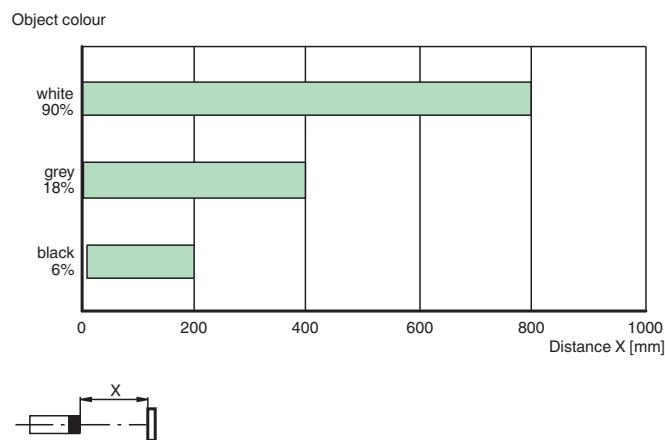

## Configuration

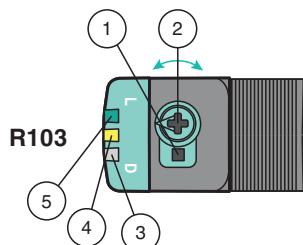

- 1 - Light-on / dark-on changeover switch
- 2 - Sensing range / sensitivity adjuster
- 3 - Operating indicator / dark on
- 4 - Signal indicator
- 5 - Operating indicator / light on

To unlock the adjustment functions turn the sensing range adjuster / sensitivity adjuster for more than 180 degrees.

### Sensing Range/ Sensitivity

Turn sensing range / sensitivity adjuster clockwise to increase sensing range / sensitivity.

Turn sensing range / sensitivity adjuster counter clockwise to decrease sensing range / sensitivity.

If the end of the adjustment range is reached, the signal indicator starts flashing with 8 Hz.

### Light-on / Dark-on Configuration

Press the light-on / dark-on changeover switch for more than 1 second (less than 4 seconds). The light-on / dark-on mode changes and the operating indicators are activated accordingly.

If you press the light-on / dark-on changeover switch for more than 4 seconds, the light-on /dark-on mode changes back to the original setting. On release of the light-on / dark-on changeover switch the current state is activated.

### Restore Factory Settings

Press the light-on / dark-on changeover switch for more than 10 seconds (less than 30 seconds) until all LEDs turn off. On release of the light-on / dark-on changeover switch the signal indicator turns on. After 5 seconds the sensor resumes operation with factory default settings.

After 5 minutes of inactivity the sensing range / sensitivity adjustment is locked. In order to reactivate the sensing range / sensitivity adjustment, turn the sensing range / sensitivity adjuster for more than 180 degrees.