


Inductive Sensors
BES IKU-011T.28-G-S4
Order Code: BES02TF



1) Sensing surface, 2) Teach-In

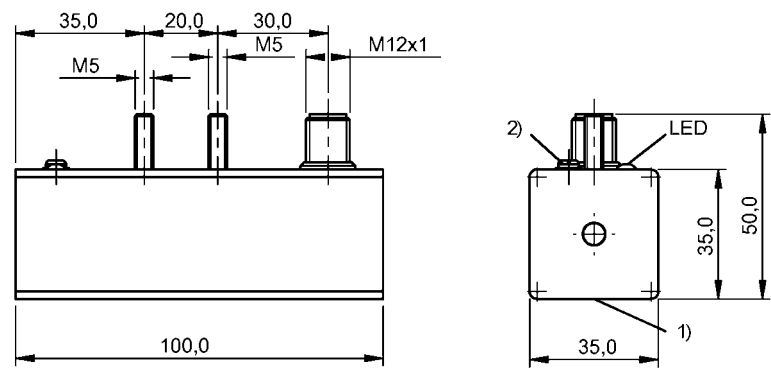

Basic features

Additional features	Teach-in function
Approval/Conformity	CE WEEE
Basic standard	IEC 60947-5-2

Display/Operation

Function indicator	yes
Power indicator	no

Electrical connection

Connection	M12x1-Male, 4-pin, A-coded
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Load capacitance max. at U _e	0.15 µF
Min. operating current I _m	0 mA
No-load current I _o max., damped	10 mA
No-load current I _o max., undamped	10 mA
Operating voltage U _b	10...30 VDC
Output resistance R _a	Open collector
Rated insulation voltage U _i	75 V DC
Rated operating current I _e	400 mA
Rated operating voltage U _e DC	24 V
Rated short circuit current	100 A
Ready delay t _v max.	300 ms
Ripple max. (% of U _e)	15 %
Switching frequency	50 Hz
Utilization category	DC -13
Voltage drop static max.	2 V

Environmental conditions

Ambient temperature	-25...70 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 g _n , 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP65

Interface

Switching output	PNP normally open/normally closed (NO/NC)
------------------	---

Inductive Sensors
BES IKU-011T.28-G-S4
Order Code: BES02TF



Material

Housing material	Plastic
Material sensing surface	Plastic

Mechanical data

Dimension	100 x 35 x 50 mm
Installation	non-flush
Size	100x35x50

Range/Distance

Hysteresis H max. (% of Sr)	15.0 %
Rated operating distance Sn	30 mm
Real switching distance sr	30 mm
Repeat accuracy max. (% of Sr)	5.0 %
Temperature drift max. (% of Sr)	10 %
Tolerance Sr	10 %

Remarks

Teach-In function enables use under non-standard conditions such as conditionally flush mounting. For additional setting information, refer to Operating Guide 851 158-0609.

The specified enclosure rating is met when the threaded cover is installed.

Effective operating distance Sr: 30 mm with target St37 100x50 mm, 8 mm with target St37 8x50 mm.

After eliminating the overload, the sensor is functional again after a load-dependent delay time of 5-30 s.

Connector Drawings



Wiring Diagrams

