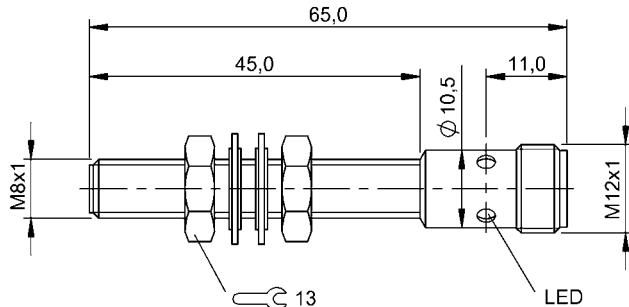


Inductive Sensors

BES M08MH1-PSC20B-S04G-101

Order Code: BES02PU

BALLUFF**Basic features**

Approval/Conformity	CE cULus WEEE
Base type deviation	Ceramic coating
Basic standard	IEC 60947-5-2

Display/Operation

Function indicator	yes
Power indicator	no

Electrical connection

Connection	M12x1-Male, 4-pin, A-coded
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Load capacitance max. at Ue	1 μ F
Min. operating current I _m	0 mA
No-load current I ₀ max., damped	10 mA
No-load current I ₀ max., undamped	5 mA
Operating voltage U _b	12...30 VDC
Output resistance R _a	33.0 kOhm + D
Rated insulation voltage U _i	75 V DC
Rated operating current I _e	200 mA
Rated operating voltage U _e DC	24 V
Rated short circuit current	100 A
Ready delay t _v max.	30 ms
Residual current I _r max.	20 μ A
Ripple max. (% of U _e)	15 %
Switching frequency	700 Hz
Utilization category	DC -13
Voltage drop static max.	2.5 V

Environmental conditions

Ambient temperature	-25...70 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 g _n , 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP67

Functional safety

MTTF (40 °C)	880 a
--------------	-------

Interface

Switching output	PNP normally open (NO)
------------------	------------------------

Material

Housing material	Brass, nickel-plated
Material sensing surface	ceramic coated

Mechanical data

Dimension	Ø 8 x 65 mm
Installation	for flush mounting
Mounting length	45.00 mm
Size	M8x1
Tightening torque	3 Nm

Remarks

The sensor is functional again after the overload has been eliminated.

Sn: reduced by the coating thickness of 0.2 mm.

Flush: See installation instructions for inductive sensors with extended range 825357.

For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings**Wiring Diagrams**