




## Thru-beam sensor (pair) OBE12M-R101-S2EP-IO



- Miniature design with versatile mounting options
- IO-Link interface for service and process data
- Various frequencies for avoiding mutual interference (cross-talk immunity)
- Extended temperature range  
-40 °C ... 60 °C
- High degree of protection IP69K




### Function

The miniature optical sensors are the first devices of their kind to offer an end-to- end solution in a small single standard design — from thru-beam sensor through to a distance measurement device. As a result of this design, the sensors are able to perform practically all standard automation tasks.

The DuraBeam laser sensors are durable and can be used in the same way as a standard sensor.

The use of Multi Pixel Technology gives the standard sensors a high level of flexibility and enables them to adapt more effectively to their operating environment.

### Dimensions

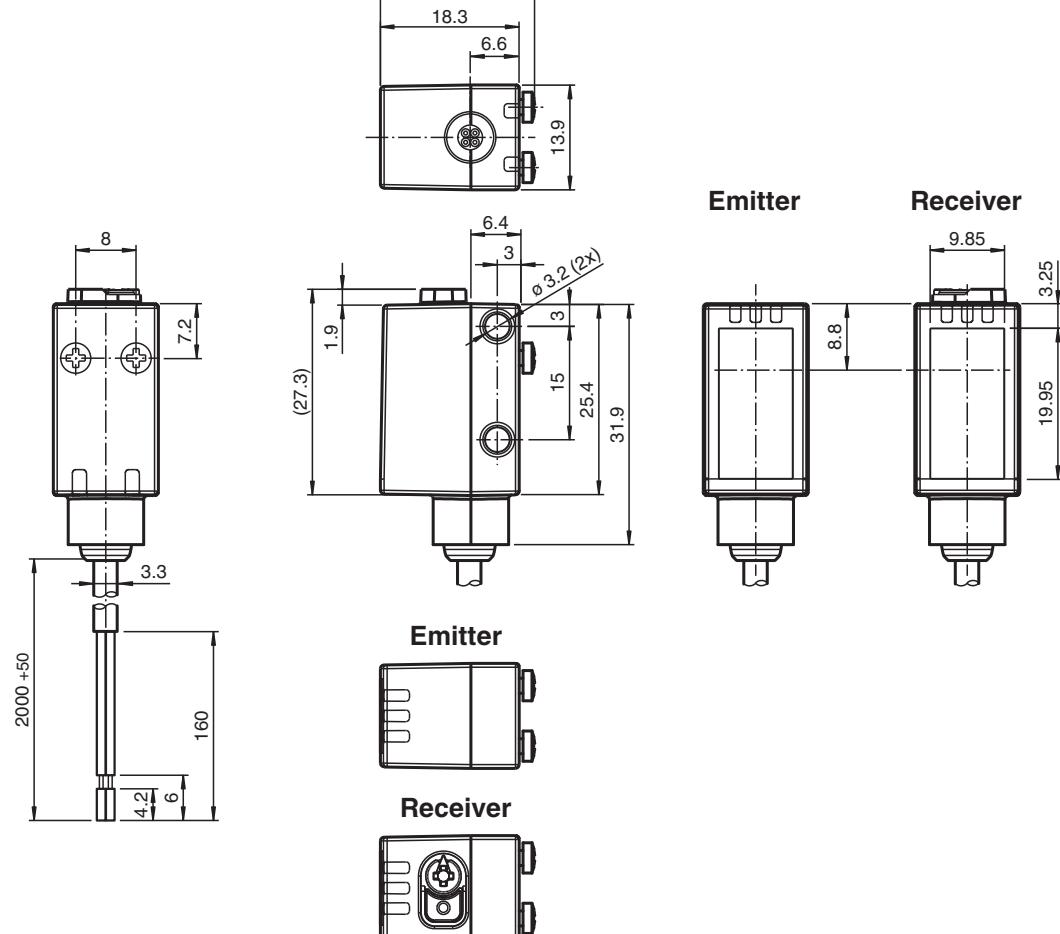

## Technical Data

## System components

|          |                    |
|----------|--------------------|
| Emitter  | OBE12M-R101-S-IO   |
| Receiver | OBE12M-R101-2EP-IO |

## General specifications

|                            |                                    |
|----------------------------|------------------------------------|
| Effective detection range  | 0 ... 12 m                         |
| Threshold detection range  | 15 m                               |
| Light source               | LED                                |
| Light type                 | modulated visible red light        |
| LED risk group labelling   | exempt group                       |
| Diameter of the light spot | approx. 65 mm at a distance of 1 m |
| Opening angle              | 3.7 °                              |
| Ambient light limit        | EN 60947-5-2 : 30000 Lux           |

## Functional safety related parameters

|                                |       |
|--------------------------------|-------|
| MTTF <sub>d</sub>              | 462 a |
| Mission Time (T <sub>M</sub> ) | 20 a  |
| Diagnostic Coverage (DC)       | 0 %   |

## Indicators/operating means

|                            |  |
|----------------------------|--|
| Operation indicator        | LED green:<br>constantly on - power on<br>flashing (4Hz) - short circuit<br>flashing with short break (1 Hz) - IO-Link mode                |
| Function indicator         | Yellow LED:<br>Permanently lit - light path clear<br>Permanently off - object detected<br>Flashing (4 Hz) - insufficient operating reserve |
| Control elements           | Receiver: light/dark switch  |
| Control elements           | Receiver: sensitivity adjustment   |
| Parameterization indicator | IO link communication: green LED goes out briefly (1 Hz)   |

## Electrical specifications

|                        |                |  |
|------------------------|----------------|--|
| Operating voltage      | U <sub>B</sub> | 10 ... 30 V DC   |
| Ripple                 |                | max. 10 %  |
| No-load supply current | I <sub>0</sub> | Emitter: ≤ 14 mA<br>Receiver: ≤ 13 mA at 24 V supply voltage |
| Protection class       |                | III  |

## Interface

|                             |  |
|-----------------------------|--|
| Interface type              | IO-Link ( via C/Q = pin 4 )  |
| IO-Link revision            | 1.1  |
| Device ID                   | Emitter: 0x110401 (1115137)<br>Receiver: 0x110301 (1114881)  |
| Transfer rate               | COM2 (38.4 kB/s)   |
| Min. cycle time             | 2.3 ms   |
| Process data width          | Emitter:<br>Process data output: 2 Bit<br>Receiver:<br>Process data input: 2 Bit<br>Process data output: 2 Bit |
| SIO mode support            | yes  |
| Compatible master port type | A  |

## Input

|            |   |
|------------|---|
| Test input | emitter deactivation at +U <sub>B</sub> |
|------------|---|



## Output

|                   |   |
|-------------------|---|
| Switching type    | The switching type of the sensor is adjustable. The default setting is:<br>C/Q - BK: NPN normally open / dark-on, PNP normally closed / light-on, IO-Link<br>/Q - WH: NPN normally closed / light-on, PNP normally open / dark-on |
| Signal output     | 2 push-pull (4 in 1) outputs, short-circuit protected, reverse polarity protected,<br>overvoltage protected   |
| Switching voltage | max. 30 V DC  |
| Switching current | max. 100 mA, resistive load   |
| Usage category    | DC-12 and DC-13   |

## Technical Data


|   |  |            |
|---|--|------------|
| Voltage drop                                    | U <sub>d</sub>   | ≤ 1.5 V DC |
| Switching frequency                             | f  | 1000 Hz    |
| Response time                                   |  | 0.5 ms     |
| <b>Compliance with standards and directives</b> |  |            |
| Directive conformity                            |  |            |
| EMC Directive 2004/108/EC                       | EN 60947-5-2:2007+A1:2012  |            |
| Standard conformity                             |  |            |
| Product standard                                | EN 60947-5-2:2007+A1:2012<br>IEC 60947-5-2:2007 + A1:2012  |            |
| Standards                                       | UL 60947-5-2: 2014<br>IEC 61131-9:2013<br>EN 62471:2008<br>EN 61131-9:2013   |            |
| <b>Approvals and certificates</b>               |  |            |
| UL approval                                     | E87056 , cULus Listed , class 2 power supply , type rating 1   |            |
| <b>Ambient conditions</b>                       |  |            |
| Ambient temperature                             | -40 ... 60 °C (-40 ... 140 °F) , cable, fixed installation<br>-25 ... 60 °C (-13 ... 140 °F) , movable cable not appropriate for conveyor chains |            |
| Storage temperature                             | -40 ... 70 °C (-40 ... 158 °F)   |            |
| <b>Mechanical specifications</b>                |  |            |
| Degree of protection                            | IP67 / IP69 / IP69K  |            |
| Connection                                      | 2 m fixed cable  |            |
| Material  |  |            |
| Housing   | PC (Polycarbonate)   |            |
| Optical face                                    | PMMA   |            |
| Mass  | Emitter: approx. 10 g receiver: approx. 10 g   |            |
| Dimensions                                      |  |            |
| Height  | 33.8 mm  |            |
| Width   | 13.9 mm  |            |
| Depth   | 18.3 mm  |            |
| Cable length                                    | 2 m  |            |

## Connection

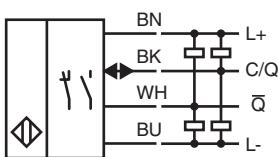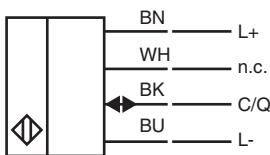


## Assembly

### Emitter




|   |                     |
|---|---------------------|
| 1 | Operating indicator |
|---|---------------------|

### Receiver




|   |                                    |
|---|------------------------------------|
| 1 | Light-on/dark-on changeover switch |
| 2 | Sensitivity adjuster               |
| 3 | Operating indicator / light on     |
| 4 | Signal indicator                   |
| 5 | Operating indicator / dark on      |


## Characteristic Curve

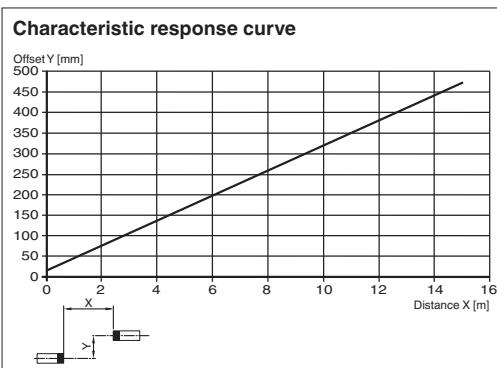

## Relative received light strength

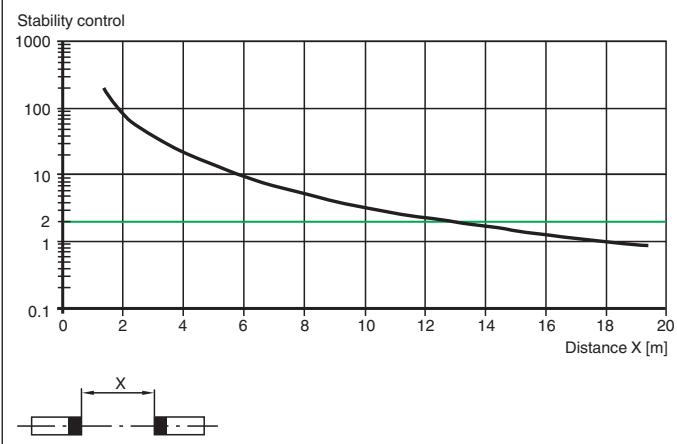

## Configuration

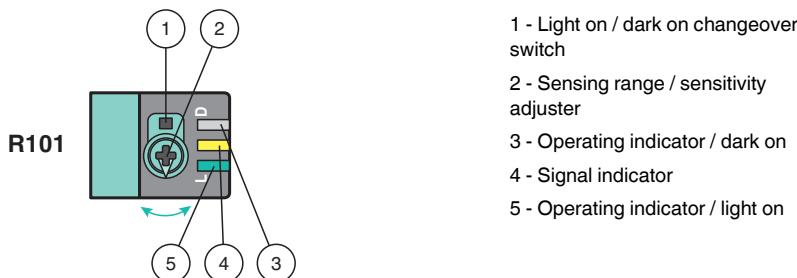

To unlock the adjustment functions turn the sensing range adjuster for more than 180 degrees.

### Sensing Range / Sensitivity

Turn sensing range / sensitivity adjuster clockwise to increase sensing range / sensitivity.

Turn sensing range /sensitivity adjuster counterclockwise to decrease sensing range / sensitivity.

If the end of the adjustment range is reached, the signal indicator starts flashing with 8 Hz.

### Light on / Dark on Configuration

Press the light on / dark on changeover switch for more than 1 second (less than 4 seconds). The light on / dark on mode changes and the operating indicators are activated accordingly.

If you press the light on / dark on changeover switch for more than 4 seconds, the light on / dark on mode changes back to the original setting. On release of the light on / dark on changeover switch the current state is activated.

### Restore Factory Settings

Press the light on / dark on changeover switch for more than 10 seconds (less than 30 seconds) until all LEDs turn off. On release of the light on / dark on changeover switch the signal indicator turns on. After 5 seconds the sensor resumes operation with factory settings.

After 5 minutes of inactivity the sensing range / sensitivity adjustment is locked. In order to reactivate the sensing range / sensitivity adjustment, turn the sensing range / sensitivity adjuster for more than 180 degrees.