



Digital Output with Position Feedback FB2216E3

- 1-channel
- 1 digital output, 2 digital inputs
- Inputs and output Ex ia
- Installation in suitable enclosures in Zone 1
- Module can be exchanged under voltage (hot swap)
- Line fault detection switched on and off
- Positive or negative logic selectable
- Simulation mode for service operations (forcing)
- Permanently self-monitoring
- Output with watchdog
- Output with bus-independent safety shutdown input



Function

The digital output features 1 output with 2 feedback inputs.


The device can be used to switch solenoids, sounders, or indicators (without line fault detection) in the field. Furthermore, the device accepts digital input signals of NAMUR sensors or mechanical contacts from the field.

The output can be switched off via a contact. This can be used for bus-independent safety applications.

Open and short circuit line faults are detected in on and off state.

The intrinsically safe inputs and the output are galvanically isolated from the bus and the power supply.

Connection

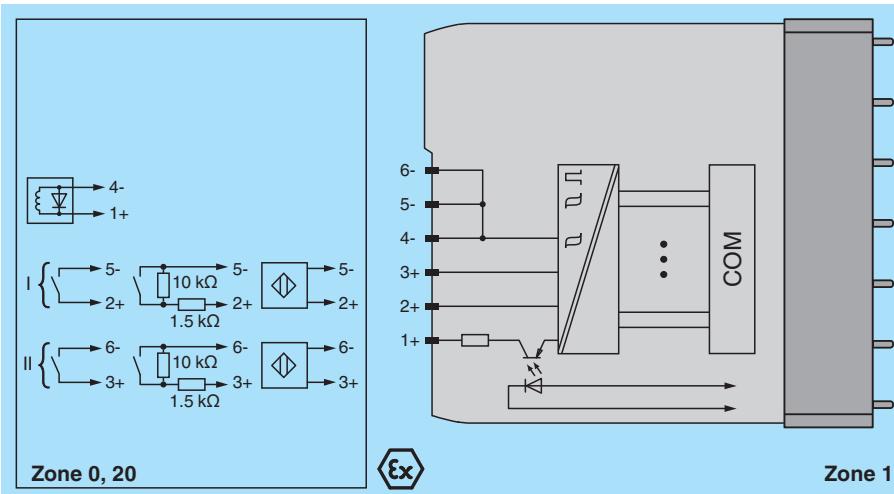

Technical Data

Slots

Occupied slots	1
----------------	---

Supply

Connection	backplane bus / booster terminals	
Rated voltage	U _r	12 V DC, only in connection with the power supplies FB92**
Power dissipation	1.3 W	
Power consumption	1.85 W	

Internal bus

Connection	backplane bus
Interface	manufacturer-specific bus to standard com unit

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Technical Data

Digital input

Number of channels	2	
Sensor interface		
Connection	NAMUR sensor	
Connection [2]	volt-free contact	
Connection	channel I: 2+, 5-; channel II: 3+, 6-	
Rated values	acc. to EN 60947-5-6 (NAMUR)	
Switching point/switching hysteresis	1.2 ... 2.1 mA / ± 0.2 mA	
Internal resistor	R_i	1 kΩ
Line fault detection	can be switched on/off for each channel via configuration tool	
Connection	mechanical switch with additional resistors (see connection diagram) proximity sensors without additional wiring	
Short-circuit	< 360 Ω	
Open-circuit	< 0.35 mA	
Minimum pulse duration	1 ms	

Digital output

Number of channels	1	
Suitable field devices		
Field device	Solenoid Valve	
Field device [2]	audible alarm	
Field device [3]	visual alarm	
Connection	channel I: 1+, 4-	
Internal resistor	R_i	258 Ω
Current limit	I_{max}	50 mA
Open loop voltage	U_s	23 V
Line fault detection	can be switched on/off for each channel via configuration tool , also when turned off (every 2.5 s the valve is turned on for 2 ms)	
Short-circuit	< 50 Ω	
Open-circuit	> 10 kΩ	
Response time	10 ms (depending on bus cycle time)	
Watchdog	within 0.5 s the device goes in safe state, e.g. after loss of communication	

Indicators/settings

LED indication	Power LED (P) green: supply Diagnostic LED (I) red: module fault , red flashing: communication error , white: fixed parameter set (parameters from com unit are ignored) , white flashing: requests parameters from com unit Status LED (O: output, I1: input 1, I2: input 2) red: line fault (lead breakage or short circuit) , yellow: state of digital I/O (0/1)	
Coding	optional mechanical coding via front socket	

Directive conformity

Electromagnetic compatibility		
Directive 2014/30/EU	EN 61326-1:2013	

Conformity

Electromagnetic compatibility	NE 21
Degree of protection	IEC 60529
Environmental test	EN 60068-2-14
Shock resistance	EN 60068-2-27
Vibration resistance	EN 60068-2-6
Damaging gas	EN 60068-2-42
Relative humidity	EN 60068-2-78


Ambient conditions

Ambient temperature	-40 ... 60 °C (-40 ... 140 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Relative humidity	95 % non-condensing
Shock resistance	shock type I, shock duration 11 ms, shock amplitude 15 g, number of shocks 18

Technical Data


Vibration resistance	frequency range 10 ... 150 Hz; transition frequency: 57.56 Hz, amplitude/acceleration ± 0.075 mm/1 g; 10 cycles frequency range 5 ... 100 Hz; transition frequency: 13.2 Hz amplitude/acceleration ± 1 mm/0.7 g; 90 minutes at each resonance	
Damaging gas	designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3	
Mechanical specifications		
Degree of protection	IP20 (module) , a separate housing is required acc. to the system description	
Connection	removable front connector with screw flange (accessory) wiring connection via spring terminals (0.14 ... 1.5 mm ²) or screw terminals (0.08 ... 1.5 mm ²)	
Mass	approx. 420 g	
Dimensions	28 x 107 x 132 mm (1.1 x 4.2 x 5.2 inch)	
Data for application in connection with hazardous areas		
EU-type examination certificate	Presafe 19 ATEX 14054U	
Marking	Ex II 2(1)G Ex db eb q [ia Ga] IIC Gb II (1)D [Ex ia Da] IIIC I (M1) [Ex ia Ma] I	
Input		
Voltage	U _o	10 V
Current	I _o	13 mA
Power	P _o	33 mW (linear characteristic)
Internal capacitance	C _i	1.2 nF
Internal inductance	L _i	0 mH
Output		
Voltage	U _o	24.2 V
Current	I _o	108 mA
Power	P _o	654 mW
Internal capacitance	C _i	12 nF
Internal inductance	L _i	0 mH
Galvanic isolation		
Input/power supply, internal bus	safe electrical isolation acc. to EN 60079-11, voltage peak value 375 V	
Output/power supply, internal bus	safe electrical isolation acc. to EN 60079-11, voltage peak value 375 V	
Directive conformity		
Directive 2014/34/EU	EN 60079-0:2018+AC:2020 EN 60079-1:2014 EN 60079-5:2015 EN 60079-7:2015+A1:2018 EN 60079-11:2012	
International approvals		
ATEX approval	Presafe 19 ATEX 14054U	
IECEx approval		
IECEx certificate	IECEx PRE 19.0009U	
IECEx marking	Ex db eb q [ia Ga] IIC Gb [Ex ia Da] IIIC [Ex ia Ma] I	
General information		
System information	The module has to be mounted in appropriate backplanes and housings (FB92**) in Zone 1, 2, 21, 22 or outside hazardous areas (gas or dust). Here, observe the corresponding EC-type examination certificate.	
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .	

Assembly

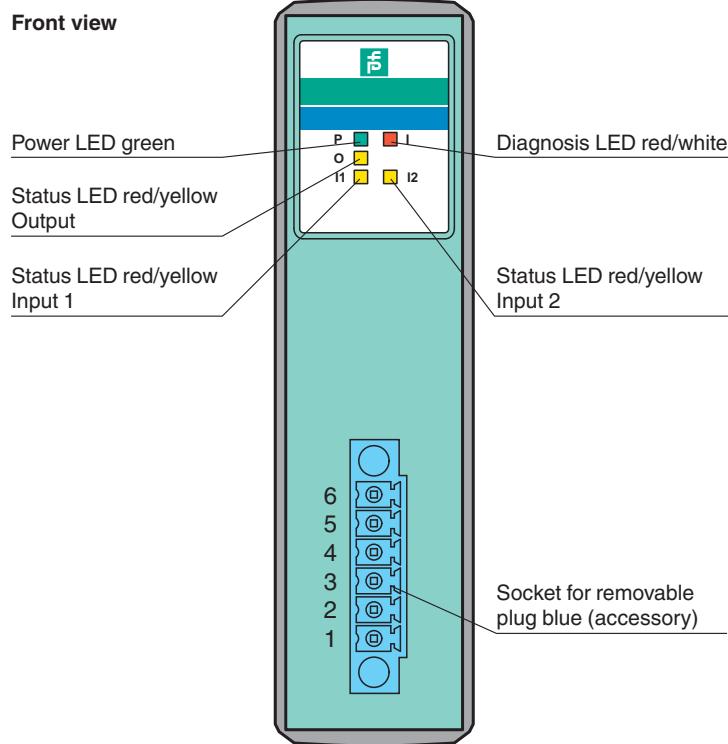

Characteristic Curve

Load calculation



R_{load} = Field loop resistance

$$U_e = U_s - R_i \times I_e$$

$$I_e = U_s / (R_i + R_{load})$$

Output characteristics

