


Thru-beam sensor (pair) OBE20M-R103-S2EP-IO-L



- Miniature design with versatile mounting options
- DuraBeam Laser Sensors - durable and employable like an LED
- IO-Link interface for service and process data
- Various frequencies for avoiding mutual interference (cross-talk immunity)
- Extended temperature range
-40 °C ... 60 °C
- High degree of protection IP69K

Laser thru-beam sensor



IO-Link

Function


The R103 series miniature optical sensors are the first devices of their kind to offer an end-to-end solution in a small standard design — from thru-beam sensor through to a distance measurement device. As a result of this design, the sensors are able to perform practically all standard automation tasks.

The entire series enables sensors to communicate via IO-Link.

The DuraBeam laser sensors are durable and can be used in the same way as a standard sensor.

The use of Multi Pixel Technology gives the standard sensors a high level of flexibility and enables them to adapt more effectively to their operating environment.

Dimensions

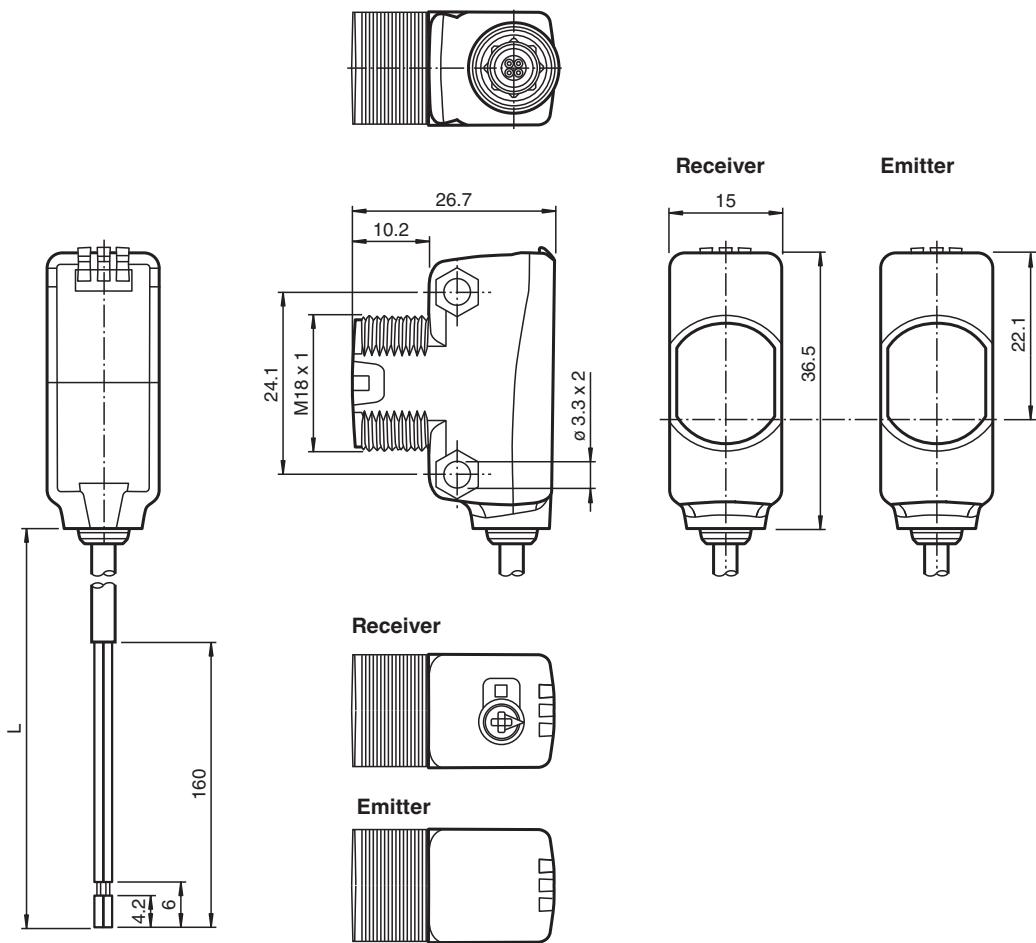

Technical Data

| System components | | |
|--------------------------------------|--|--|
| Emitter | OBE20M-R103-S-IO-L | |
| Receiver | OBE20M-R103-2EP-IO-L | |
| General specifications | | |
| Effective detection range | 0 ... 20 m | |
| Threshold detection range | 30 m | |
| Light source | laser diode | |
| Light type | modulated visible red light | |
| Laser nominal ratings | | |
| Note | LASER LIGHT , DO NOT STARE INTO BEAM | |
| Laser class | 1 | |
| Wave length | 680 nm | |
| Beam divergence | > 5 mrad ; d63 < 2 mm in the range of 250 mm ... 750 mm | |
| Pulse length | 1.6 µs | |
| Repetition rate | max. 17.6 kHz | |
| max. pulse energy | 9.6 nJ | |
| Diameter of the light spot | approx. 50 mm at a distance of 20 m | |
| Opening angle | approx. 0.3 ° | |
| Ambient light limit | EN 60947-5-2 : 30000 Lux | |
| Functional safety related parameters | | |
| MTTF _d | 440 a | |
| Mission Time (T _M) | 20 a | |
| Diagnostic Coverage (DC) | 0 % | |
| Indicators/operating means | | |
| Operation indicator | LED green: constantly on - power on flashing (4Hz) - short circuit flashing with short break (1 Hz) - IO-Link mode | |
| Function indicator | Yellow LED: Permanently lit - light path clear Permanently off - object detected Flashing (4 Hz) - insufficient operating reserve | |
| Control elements | Receiver: light/dark switch | |
| Control elements | Receiver: sensitivity adjustment | |
| Parameterization indicator | IO link communication: green LED goes out briefly (1 Hz) | |
| Electrical specifications | | |
| Operating voltage | U _B | 10 ... 30 V DC |
| Ripple | max. 10 % | |
| No-load supply current | I ₀ | Emitter: ≤ 13 mA Receiver: ≤ 13 mA at 24 V supply voltage |
| Protection class | III | |
| Interface | | |
| Interface type | IO-Link (via C/Q = pin 4) | |
| IO-Link revision | 1.1 | |
| Device ID | Emitter: 0x110404 (1115140) Receiver: 0x110304 (1114884) | |
| Transfer rate | COM2 (38.4 kBit/s) | |
| Min. cycle time | 2.3 ms | |
| Process data width | Emitter: Process data output: 2 Bit Receiver: Process data input: 2 Bit Process data output: 2 Bit | |
| SIO mode support | yes | |
| Compatible master port type | A | |
| Input | | |
| Test input | emitter deactivation at +U _B | |

Technical Data

Output

| | | |
|---------------------|---|-----------------|
| Switching type | The switching type of the sensor is adjustable. The default setting is: C/Q - BK: NPN normally open / dark-on, PNP normally closed / light-on, IO-Link /Q - WH: NPN normally closed / light-on, PNP normally open / dark-on | |
| Signal output | 2 push-pull (4 in 1) outputs, short-circuit protected, reverse polarity protected, overvoltage protected | |
| Switching voltage | max. 30 V DC | |
| Switching current | max. 100 mA, resistive load | |
| Usage category | DC-12 and DC-13 | |
| Voltage drop | U_d | ≤ 1.5 V DC |
| Switching frequency | f | 1250 Hz |
| Response time | 0.4 ms | |

Conformity

| | |
|-------------------------|-----------------|
| Communication interface | IEC 61131-9 |
| Product standard | EN 60947-5-2 |
| Laser safety | EN 60825-1:2014 |

Approvals and certificates

| | |
|--------------|---|
| UL approval | E87056, cULus Listed, class 2 power supply, type rating 1 |
| FDA approval | IEC 60825-1:2014 Complies with 21 CFR 1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed. 3 as described in Laser Notice 56, dated May 8, 2019. |

Ambient conditions



| | |
|---------------------|---|
| Ambient temperature | -40 ... 60 °C (-40 ... 140 °F), cable, fixed installation |
| | -25 ... 60 °C (-13 ... 140 °F), movable cable not appropriate for conveyor chains |
| Storage temperature | -40 ... 70 °C (-40 ... 158 °F) |

Mechanical specifications

| | |
|----------------------|--|
| Degree of protection | IP67 / IP69 / IP69K |
| Connection | 2 m fixed cable |
| Material | |
| Housing | PC (Polycarbonate) |
| Optical face | PMMA |
| Mass | Emitter: approx. 38 g receiver: approx. 38 g |
| Dimensions | |
| Height | 36.5 mm |
| Width | 15 mm |
| Depth | 26.7 mm |
| Cable length | 2 m |


Connection

Release date: 2025-01-30 Date of issue: 2025-01-30 Filename: 284461_eng.pdf

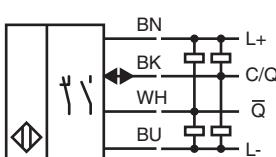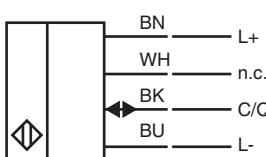


Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Assembly

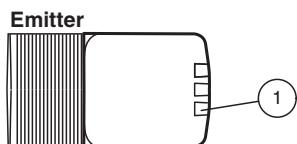


1 Operating indicator

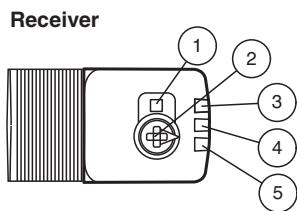


| | |
|---|--------------------------------|
| 1 | Light-on/Dark-on switch |
| 2 | Sensitivity adjuster |
| 3 | Operating indicator / dark on |
| 4 | Signal indicator |
| 5 | Operating indicator / light on |

Characteristic Curve


Characteristic response curve

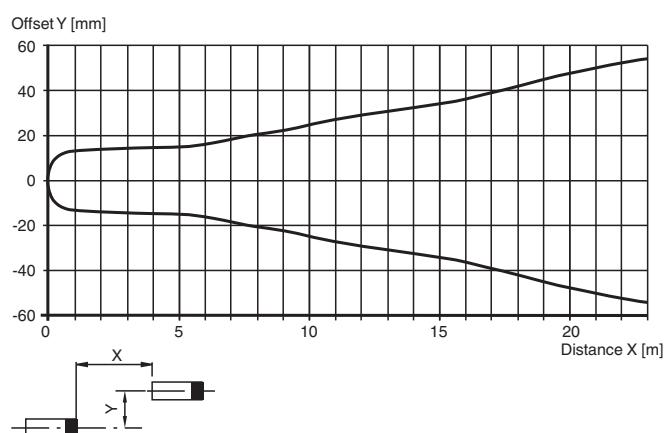

Relative received light strength

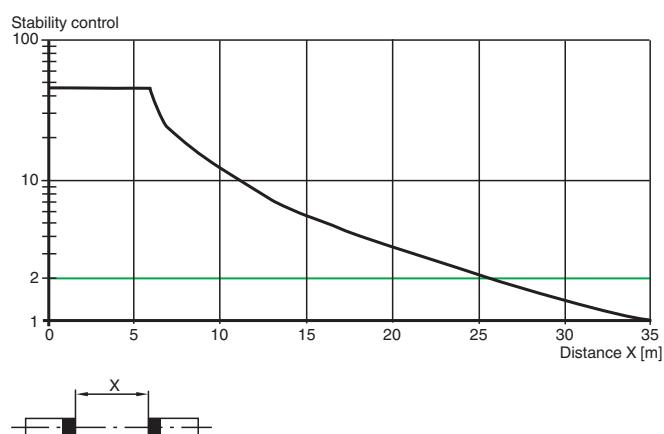

Configuration

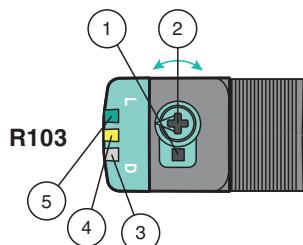

- 1 - Light-on / dark-on changeover switch
- 2 - Sensing range / sensitivity adjuster
- 3 - Operating indicator / dark on
- 4 - Signal indicator
- 5 - Operating indicator / light on

To unlock the adjustment functions turn the sensing range adjuster / sensitivity adjuster for more than 180 degrees.

Sensing Range/ Sensitivity

Turn sensing range / sensitivity adjuster clockwise to increase sensing range / sensitivity.

Turn sensing range / sensitivity adjuster counter clockwise to decrease sensing range / sensitivity.

If the end of the adjustment range is reached, the signal indicator starts flashing with 8 Hz.

Light-on / Dark-on Configuration

Press the light-on / dark-on changeover switch for more than 1 second (less than 4 seconds). The light-on / dark-on mode changes and the operating indicators are activated accordingly.

If you press the light-on / dark-on changeover switch for more than 4 seconds, the light-on /dark-on mode changes back to the original setting. On release of the light-on / dark-on changeover switch the current state is activated.

Restore Factory Settings

Press the light-on / dark-on changeover switch for more than 10 seconds (less than 30 seconds) until all LEDs turn off. On release of the light-on / dark-on changeover switch the signal indicator turns on. After 5 seconds the sensor resumes operation with factory default settings.

After 5 minutes of inactivity the sensing range / sensitivity adjustment is locked. In order to reactivate the sensing range / sensitivity adjustment, turn the sensing range / sensitivity adjuster for more than 180 degrees.