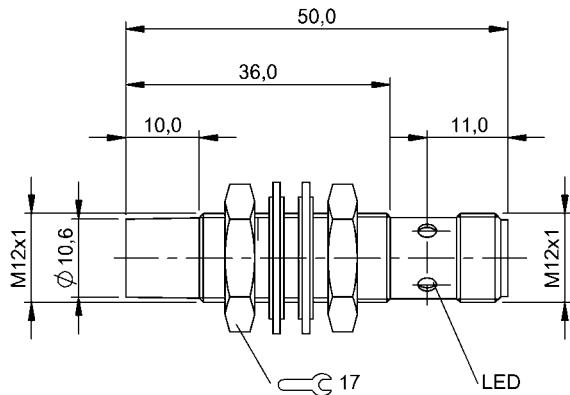


Inductive Sensors

BES M12MD1-PSC80E-S04G-W01

Order Code: BES02JY

BALLUFF**Basic features**

Approval/Conformity	CE UKCA cULus WEEE
Base type deviation	Ceramic coating
Basic standard	IEC 60947-5-2

Display/Operation

Function indicator	yes
Power indicator	no

Electrical connection

Connection	M12x1-Male, 4-pin, A-coded
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Load capacitance max. at Ue	1 μ F
Magnetic field strength, interference field	100 kA/m
Min. operating current Im	0 mA
No-load current Io max., damped	15 mA
No-load current Io max., undamped	10 mA
Operating voltage Ub	10...30 VDC
Output resistance Ra	33.0 kOhm
Protection class	II
Rated insulation voltage Ui	250 V AC
Rated operating current Ie	200 mA
Rated operating voltage Ue DC	24 V
Rated short circuit current	100 A
Ready delay tv max.	15 ms
Residual current Ir max.	80 μ A
Ripple max. (% of Ue)	10 %
Switching frequency	2000 Hz
Utilization category	DC -13
Voltage drop static max.	2.5 V

Environmental conditions

Ambient temperature	-25...70 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 g _n , 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP67
Magnetic field immune	magnetic field immune (AC/DC)

Functional safety

MTTF (40 °C)	320 a
--------------	-------

Interface

Switching output PNP normally open (NO)

Material

Housing material Brass, PTFE coated

Material sensing surface ceramic coated

Mechanical data

Dimension Ø 12 x 50 mm

Installation non-flush

Mounting length 26.00 mm

Size M12x1

Tightening torque 8 Nm

Range/Distance

Assured operating distance Sa 6.3 mm

Hysteresis H max. (% of Sr) 15.0 %

Rated operating distance Sn 8 mm

Real switching distance sr 8 mm

Repeat accuracy max. (% of Sr) 5.0 %

Switching distance marking ■■

Temperature drift max. (% of Sr) 10 %

Tolerance Sr ±10 %

Remarks

Sn: reduced by the coating thickness of 0.2 mm.

The sensor is functional again after the overload has been eliminated.

For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings**Wiring Diagrams**