


Field-Attachable Connectors  
BCC M488-0000-1A-000-43X834-000  
Order Code: BCC04ME

**BALLUFF**

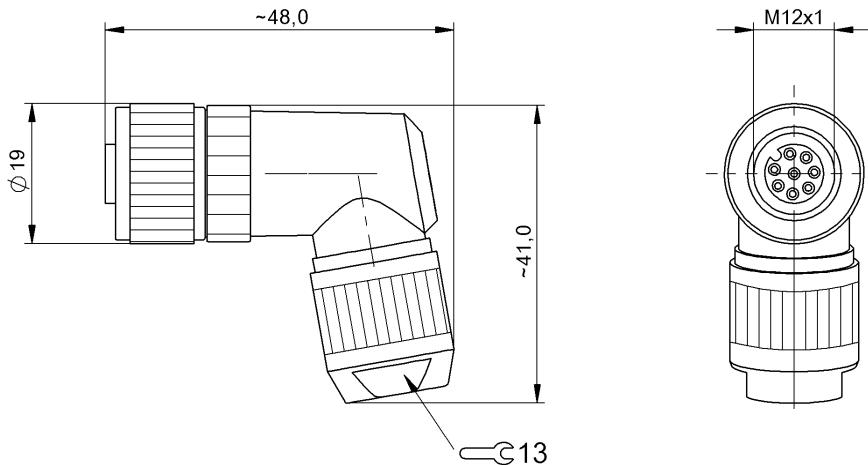

## Basic features

Approval/Conformity WEEE

## Electrical connection

Cable diameter D	4...8 mm
Connection	M12x1-Female, angled, 8-pin, A-coded
Contact shield	Iris spring
Number of connectable contacts	8
System	Can be fabricated

## Electrical data

Operating voltage Ub	30 VDC / 30 VAC
Rated current (40 °C)	1.75 A

## Remarks

Enclosure rating per IEC 60529, only in screwed state with the associated mating piece.

## Environmental conditions

Ambient temperature	-25...85 °C
IP rating	IP67


## Material

Material contact carrier	PA
Material contacts	Bronze
Material cover nut	Die-cast zinc
Material grip	Die-cast zinc

## Mechanical data

Connection cross-section	0.14...0.34 mm <sup>2</sup>
Type of wire mounting	IDC

## Connector Drawings



PIN 1-8 usable