


Inductive Sensors

BES M30MF-GSC15B-BP00,3-GS04

Order Code: BES008Y

BALLUFF

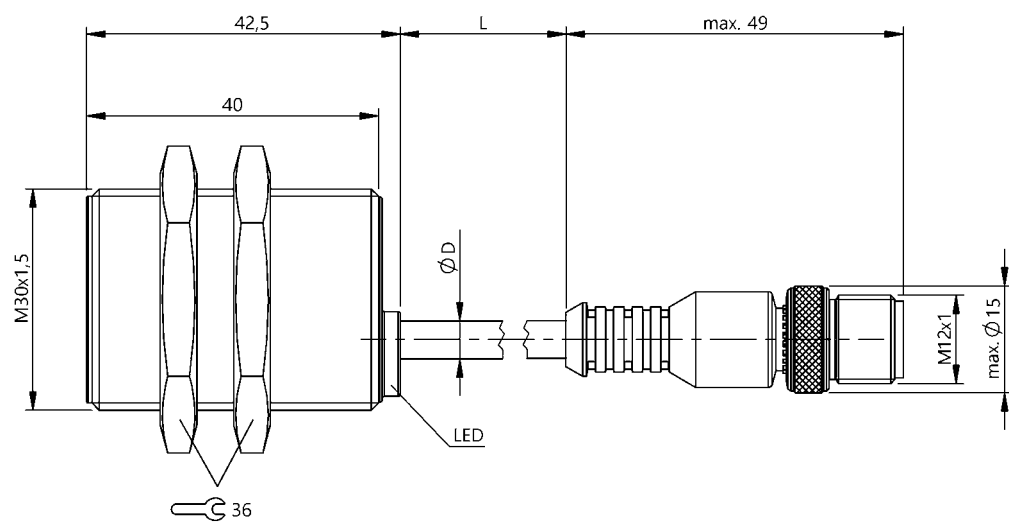

Basic features

Approval/Conformity	cULus CE UKCA WEEE
Basic standard	IEC 60947-5-2
Trademark	Global

Display/Operation

Function indicator	yes
Power indicator	no

Electrical connection

Cable diameter D	4.70 mm
Cable length L	0.3 m
Connection	M12x1-Male, 4-pin, A-coded
Connection type	Cable with connector, 0.30 m, PUR
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Load capacitance max. at Ue	1 µF
Min. operating current Im	5 mA
Operating voltage Ub	10...36 VDC
Rated insulation voltage Ui	75 V DC
Rated operating current Ie	100 mA
Rated operating voltage Ue DC	24 V
Rated short circuit current	100 A
Ready delay tv max.	50 ms
Residual current Ir max.	600 µA
Ripple max. (% of Ue)	15 %
Switching frequency	400 Hz
Utilization category	DC -13
Voltage drop static max.	4.2 V

Environmental conditions

Ambient temperature	-25...70 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 gn, 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP67

Functional safety

MTTF (40 °C)	315 a
--------------	-------

Interface

Switching output	polarized normally open (NO)
------------------	------------------------------

Inductive Sensors
BES M30MF-GSC15B-BP00,3-GS04
Order Code: BES008Y



Material

Housing material	Brass, Nickel-free coated
Material jacket	PUR
Material sensing surface	PA 12

Mechanical data

Dimension	Ø 30 x 42.5 mm
Installation	for flush mounting
Mounting length	40.00 mm
Size	M30x1.5
Tightening torque	70 Nm

Range/Distance

Assured operating distance Sa	12 mm
Hysteresis H max. (% of Sr)	20.0 %
Rated operating distance Sn	15 mm
Real switching distance sr	15 mm
Repeat accuracy max. (% of Sr)	5.0 %
Switching distance marking	■ ■
Temperature drift max. (% of Sr)	10 %
Tolerance Sr	±10 %

Remarks

Specify maximum attainable switching frequency (not per IEC 60947-5-2)
The sensor is functional again after the overload has been eliminated.
Flush: See installation instructions for inductive sensors with extended range 825357.
For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings



Wiring Diagrams

