

# Ultrasonic sensor

## UC500-18GS-2EP-IO-V15



- IO-Link Interface for process data, parameterization and diagnosis
- Programmable via DTM with PACTWARE
- Programmable via IrDA (infrared interface)
- Selectable sound lobe width
- Synchronization options
- Enhanced temperature compensation adjustable, stable measuring values already 2 min after switching on
- 2 Push-pull outputs


Single head system



### Function

The UC\*-18GS\*IO\* series ultrasonic sensor combines versatility with a compact housing. All functions can be conveniently parameterized via IO-Link or IrDa interface. A precise interference suppression and the adjustable sound beam width allow an optimal adaptation to your application. The output configuration as well as the sound beam width can also be set directly on the sensor via programming buttons. Process and service data can be transmitted via IO-Link, allowing easy integration into Industry 4.0 applications.

### Dimensions

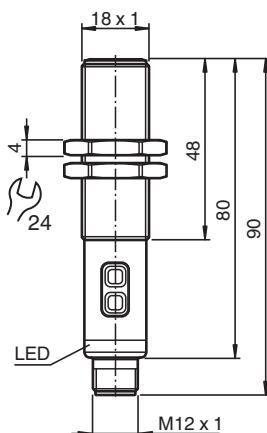

### Technical Data

#### General specifications

Sensing range	30 ... 500 mm
Adjustment range	50 ... 500 mm
Dead band	0 ... 30 mm
Standard target plate	100 mm x 100 mm
Transducer frequency	approx. 300 kHz
Response delay	minimum : 20 ms factory setting: 40 ms
Sensor cycle time	≥ 10 ms (factory setting) ; programmable to 60 s


## Technical Data

Temperature influence	with temperature compensation: $\leq \pm 0.75\%$ of the end value 10 min after switching on the sensor (factory setting) with enhanced temperature compensation: $\leq \pm 0.75\%$ of the end value 2 min after switching on the sensor without temperature compensation: $0.17\%/\text{K}$	
<b>Memory</b>		
Non-volatile memory	EEPROM	
Write cycles	300000	
<b>Indicators/operating means</b>		
LED green	solid: power on flashing: standby mode or IO-Link communication	
LED yellow	solid: object in evaluation range flashing: switch point programming, object detected	
LED red	solid: error flashing: switch point programming, object not detected	
<b>Electrical specifications</b>		
Operating voltage	$U_B$	10 ... 30 V DC, ripple $10\%_{\text{SS}}$
No-load supply current	$I_0$	$\leq 50\text{ mA}$
Power consumption	$P_0$	$\leq 700\text{ mW}$
Time delay before availability	$t_v$	$\leq 300\text{ ms}$
<b>Interface 1</b>		
Interface type		IO-Link (via C/Q = Pin 4)
IO-Link revision		1.1
Device profile		Smart Sensor Profile 2
Process data width		32 bit
Device ID		0x300601 (3147265)
Transfer rate		COM2 (38.4 kBit/s)
Min. cycle time		3 ms
SIO mode support		yes
Compatible master port type		Class A Class B (use 3-pole adapter or 3-wire cable)
<b>Interface 2</b>		
Interface type		IrDA (infrared interface)
Mode		point-to-point connection
Transfer rate		115.2 kBit/s
Maximum communication distance		5 cm
<b>Input/Output</b>		
Input/output type		1 synchronization connection, bidirectional
0 Level		0 ... 1 V
1 Level		2.5 V ... $U_B$
Input impedance		$> 22\text{ k}\Omega$
Output rated operating current		current source $< 2.5\text{ mA}$
Pulse length		$\geq 1\text{ ms}$ with external control, low active
Synchronization frequency		
Common mode operation		$\leq 100\text{ Hz}$
Multiplex operation		$\leq 71\text{ Hz} / n$ , $n$ = number of sensors, $n \leq 10$
<b>Switching output</b>		
Output type		2 push-pull (4 in 1) outputs, short-circuit protected, reverse polarity protected
Rated operating current	$I_e$	100 mA, short-circuit/overload protected
Switching frequency		factory setting: 14 Hz programmable to 33 Hz
Voltage drop		$\leq 2.5\text{ V}$
Repeat accuracy		$\leq \pm 0.1\%$ of full-scale value
Range hysteresis		1 % of the adjusted operating range (default settings), programmable, min. 1 mm
Off-state current		$\leq 100\text{ }\mu\text{A}$
<b>Compliance with standards and directives</b>		


## Technical Data

Standard conformity	
Standards	EN IEC 60947-5-2:2020 IEC 60947-5-2:2019 IEC 61131-9:2013
Approvals and certificates	
UL approval	cULus Listed, Class 2 Power Source
CCC approval	CCC approval / marking not required for products rated $\leq$ 36 V
Ambient conditions	
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Mechanical specifications	
Connection type	Connector plug M12 x 1 , 5-pin
Housing diameter	18 mm
Degree of protection	IP67
Material	
Housing	stainless steel (1.4305 / AISI 303)>BR>PA, PC, POM and PBT plastic parts
Transducer	epoxy resin/hollow glass sphere mixture; polyurethane foam
Installation position	any position
Mass	45 g
Tightening torque, fastening screws	max. 30 Nm
Factory settings	
Output 1	near switch point: 50 mm far switch point: 500 mm output function: Window mode output behavior: NO contact
Output 2	near switch point: 50 mm far switch point: 250 mm output function: Window mode output behavior: NO contact
Beam width	wide

## Connection



## Connection Assignment




## Connection Assignment

Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)
5	GY	(gray)


## Characteristic Curve

### Characteristic response curve

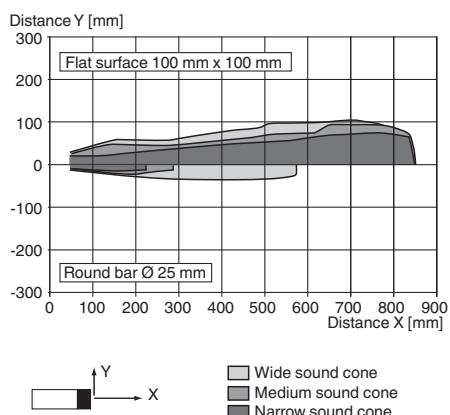


### Switching output modes


#### 1. Switch point mode

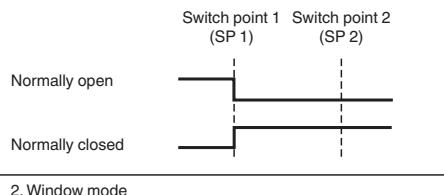


#### 2. Window mode



#### 3. Hysteresis mode



#### 4. Retroreflective mode



## Accessories

	<b>UC-PROG-IR-USB</b>	Interface cable for parameterization of sensors with IrDA interface
	<b>V1-G-2M-PVC-V1-G</b>	Cordset M12 socket straight to M12 plug straight A-coded, 4-pin, PVC cable grey

## Accessories

	<b>BF 18</b>	Mounting flange, 18 mm
	<b>BF 18-F</b>	Plastic mounting adapter, 18 mm
	<b>AB-18</b>	Mounting aid
	<b>OMH-04</b>	Mounting aid for round steel ø 12 mm or sheet 1.5 mm ... 3 mm
	<b>BF 5-30</b>	Universal mounting bracket for cylindrical sensors with a diameter of 5 ... 30 mm
	<b>UVW90-K18</b>	Ultrasonic -deflector
	<b>V15-G-2M-PVC</b>	Female cordset single-ended M12 straight A-coded, 5-pin, PVC cable grey
	<b>V15-W-2M-PUR</b>	Female cordset single-ended M12 angled A-coded, 5-pin, PUR cable grey
	<b>ICE2-8IOL-G65L-V1D</b>	EtherNet/IP IO-Link master with 8 inputs/outputs
	<b>ICE3-8IOL-G65L-V1D</b>	PROFINET IO IO-Link master with 8 inputs/outputs
	<b>ICE2-8IOL-K45S-RJ45</b>	EtherNet/IP IO-Link master with 8 inputs/outputs, DIN rail, screw terminal
	<b>ICE3-8IOL-K45P-RJ45</b>	PROFINET IO IO-Link master with 8 inputs/outputs, DIN rail, push-in terminals
	<b>ICE3-8IOL-K45S-RJ45</b>	PROFINET IO IO-Link master with 8 inputs/outputs, DIN rail, screw terminal
	<b>IO-Link-Master02-USB</b>	IO-Link master, supply via USB port or separate power supply, LED indicators, M12 plug for sensor connection
	<b>ICE1-8IOL-G30L-V1D</b>	Ethernet IO-Link module with 8 inputs/outputs
	<b>ICE1-8IOL-G60L-V1D</b>	Ethernet IO-Link module with 8 inputs/outputs
	<b>ICE2-8IOL-K45P-RJ45</b>	EtherNet/IP IO-Link master with 8 inputs/outputs, DIN rail, push-in connectors

## Function

### Adjustment possibilities

The sensor features 2 switching outputs with each 2 programmable switch points. Programming the switch points, the output mode, the output logic and the beam width can be done in two different ways:

- Using the sensor's programming buttons
- Using the IO-link interface of the sensor. This method requires an IO-link master (e.g. IO-link-Master02-USB) and the associated software. The download link is available on the product page for the sensor at [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com).

### Synchronization

The sensor features a synchronization input for suppressing ultrasonic mutual interference („cross talk“).

The following synchronization modes are available:

1. Automatic multiplex mode.
2. Automatic common mode
3. Externally controlled synchronization

### Further Documentation

- For information on programming via programming buttons and synchronisation you may refer to the commissioning instruction.
- For detailed information on application and programming via IO-Link we provide a manual.