


Thru-beam sensor

BB10-P-7650/59/103/115c



- Single-beam miniature photoelectric sensor, ideal for installing in frames or contours
- Integrated circuit
- Plug-in style housing for 13 mm hole
- Dark on version

Miniature photoelectric sensor with plug-in style housing for mounting in 13 mm hole




Function

There is no simpler way of installing a sensor: drill the hole, clip in the sensor and you're done. What's more, the BB10 plug-in sensors for doors and turnstiles offer top performance at an extremely attractive price. The switching mechanism is integrated in the compact, self-contained and temperature-stable housing, making the BB10 suitable even for extremely cold regions with temperatures as low as -40°C.

Application

- Monitoring function for turnstiles
- Activation function for restarting escalators
- Monitoring of industrial gates
- Person detection for automatic doors and gates

Dimensions

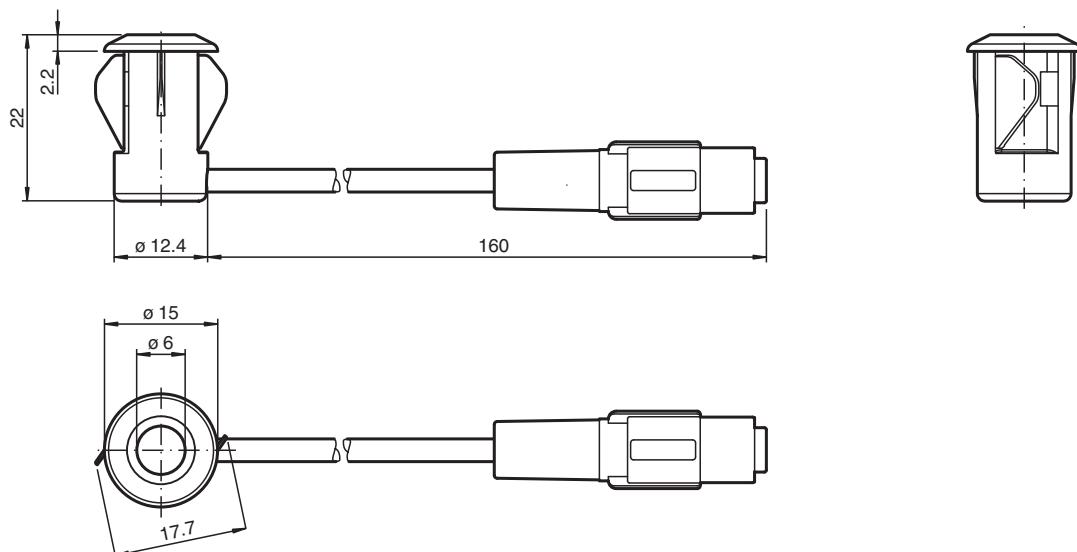


Technical Data

System components		
Emitter	BB10-T-7650/115c	
Receiver	BB10-R-F1/35/59/103/115c	
General specifications		
Effective detection range	0 ... 2 m	
Threshold detection range	min. 2,5 m, max. 4,2 m The range limit is based on the sensor switch point.	
Light source	IRED	
Light type	modulated infrared light , 880 nm	
Diameter of the light spot	approx. 250 mm at a distance of 2 m	
Opening angle	Emitter: +/- 3 ° Receiver: +/- 10 ° at max. sensing range ; typical	
Optical face	frontal	
Ambient light limit	halogen light 100000 Lux ; according to EN 60947-5-2:2007	
Functional safety related parameters		
MTTF _d	795 a	
Mission Time (T _M)	20 a	
Diagnostic Coverage (DC)	0 %	
Indicators/operating means		
Function indicator	LED red: lights up when receiving the light beam ; flashes when falling short of the operating reserve; OFF when light beam is interrupted	
Electrical specifications		
Operating voltage	U _B	10 ... 30 V DC
No-load supply current	I ₀	Emitter: ≤ 20 mA Receiver: ≤ 10 mA
Output		
Switching type	dark-on	
Signal output	1 PNP output, short-circuit protected, reverse polarity protected, open collector	
Switching voltage	max. 30 V DC	
Switching current	max. 100 mA	
Voltage drop	U _d	≤ 1.5 V DC
Switching frequency	f	100 Hz
Response time	5 ms	
Conformity		
Product standard	EN 60947-5-2	
Approvals and certificates		
CCC approval	CCC approval / marking not required for products rated ≤36 V	
Ambient conditions		
Ambient temperature	-40 ... 60 °C (-40 ... 140 °F) , fixed -20 ... 60 °C (-4 ... 140 °F) , movable	
Storage temperature	-40 ... 70 °C (-40 ... 158 °F)	
Relative humidity	90 % , noncondensing	
Mechanical specifications		
Degree of protection	IP67	
Connection	160 mm fixed cable in M8 plug Receiver: Connection line, gray ; Emitter: Connection line, black	
Material		
Housing	PC , black	
Optical face	Plastic pane	
Mass	approx. 15 g per device	
Dimensions		
Length	22 mm	
Diameter	12.5 mm	

Connection Assignment




1	BN
2	BK
3	BU

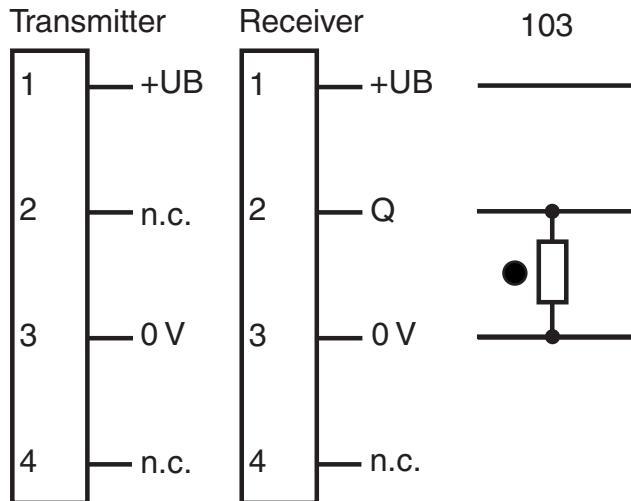


○ = Light on
 ● = Dark on

Assembly

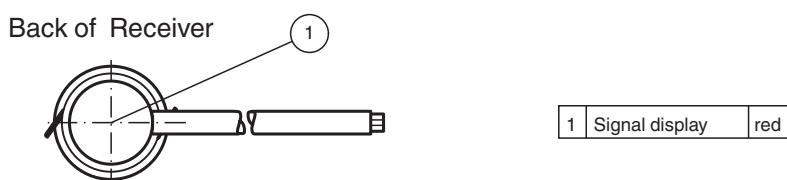


Characteristic Curve

Release date: 2024-06-24 Date of issue: 2024-06-24 Filename: 305866_eng.pdf

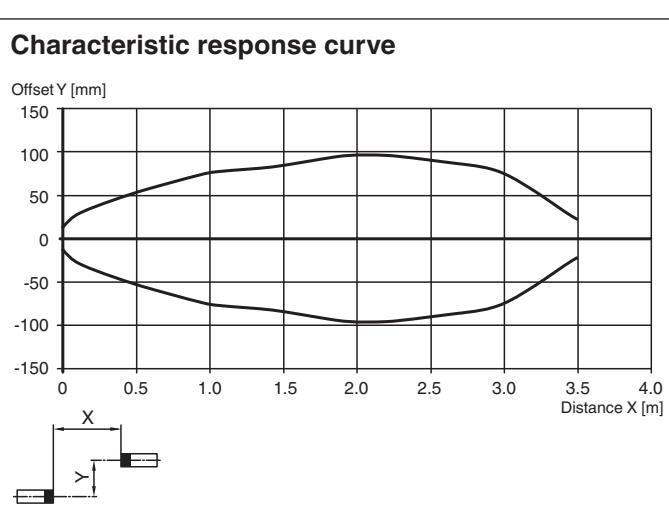

Characteristic Curve

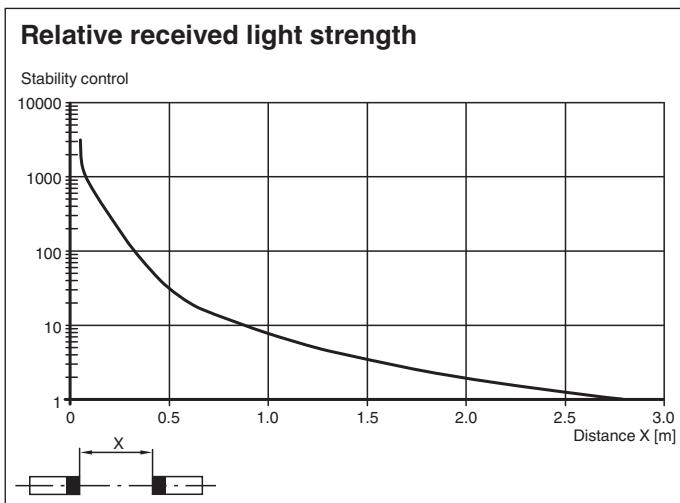

Function Principle

The thru-beam sensor requires two devices for operation; an emitter and a receiver. The emitter and receiver must be optically aligned with one another in a single line. The infrared light emitted from the emitter is recorded by the receiver and evaluated. The sensor detects both people and objects for as long as an object interrupts the detection beam, regardless of movement and surface structure.

Additional Information

Static detection:

The sensor detects both people and objects for as long as an object interrupts the detection beam, regardless of movement and surface structure.

		Electronic output
Light on /25	Person located within beam	Inactive
	No people located within beam	Active
Dark on /59	Person located within beam	Active
	No people located within beam	Inactive

Optics:

The relatively wide opening angles allow the sensors to be mounted quickly without any alignment issues. Function is maintained even if mounting profiles are slightly distorted.

Mounting:

Thanks to its compact dimensions, the sensor fits in U profiles or behind any covers.

Sheet thickness [mm]	Hole diameter [mm]	
	13	13.5
1	OK	X
2	OK	OK
3	OK	OK

X = mounting not possible

OK = mounting possible


Mounting for dual-beam protection:

For dual-beam versions, 2 light sources and receivers are required.

When using thru-beam sensors with 2 different transmission frequencies (F1 and F2), it is not necessary to observe a minimum beam distance between the thru-beam sensors.

When using thru-beam sensors with the same transmission frequency:

Ensure that the minimum beam distance is 20 cm and that the transmitter and receiver are arranged in a cross formation.

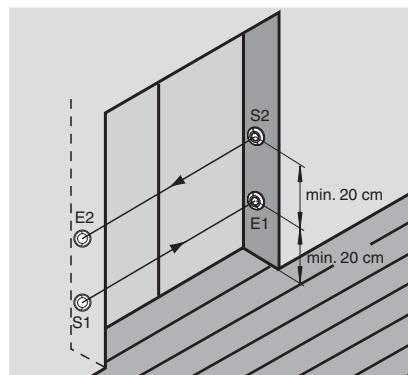

Operating chart

