

Photoelectric Sensors

BLS 18KW-XX-1P-S4-L Order Code: BOS00EW

BALLUFF

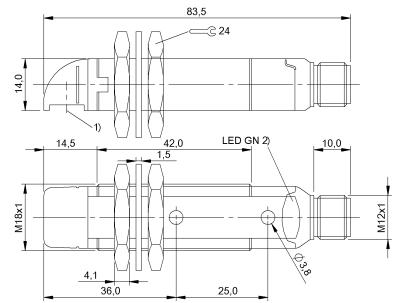



1) Optical axis, 2) Operating voltage









		_		
Bas	io.	for	<++	Iroo
Das	SIL :		-111	11 E.S.

CE Approval/Conformity UKCA cULus WEEE Basic standard IEC 60947-5-2 Principle of operation Photoelectric sensor Reference receiver BLE 18KW-..-1PP-.. Series 18KW Flat cylinder Style Optics 90° Trademark Global

Display/Operation

Display LED green: Power

Electrical connection

Connection Connector, M12x1-Male, 4-pin Polarity reversal protected ves

Electrical data

Input function Test (Emitter off) No-load current lo max. at Ue 35 mA Operating voltage Ub 10...30 VDC Rated insulation voltage Ui 75 V DC Rated operating voltage Ue DC 24 V Ripple max. (% of Ue) 8 %

Environmental conditions

-25...55 °C Ambient temperature Half-sinus, 30 g_n, 11 ms, 3x6 EN 60068-2-27, Shock EN 60068-2-6, Vibration 10...55 Hz, amplitude 0.5 mm, 3x30 min IP67 IP rating

Functional safety

MTTF (40 °C) 991 a

Material

Housing material PBT PMMA Material sensing surface

Mechanical data

Dimension Ø 18 x 14 mm Mounting part Nut M18x1 Screw M3 Tightening torque max. 1.5 Nm

Optical features

Light type Principle of optical operation Through-beam sensor (Emitter) 880 nm Wave length Range/Distance

0...15 m Rated operating distance Sn 15 m, Adjustable

Photoelectric Sensors

BLS 18KW-XX-1P-S4-L Order Code: BOS00EW



Remarks

For additional information, refer to user's guide.

Order accessories separately.

For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings
3 () 1
Wiring Diagrams
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$
Opto Symbols