



Inductive Sensors

BES M18MI-PSC70B-S04G-W01
Order Code: BES02KE

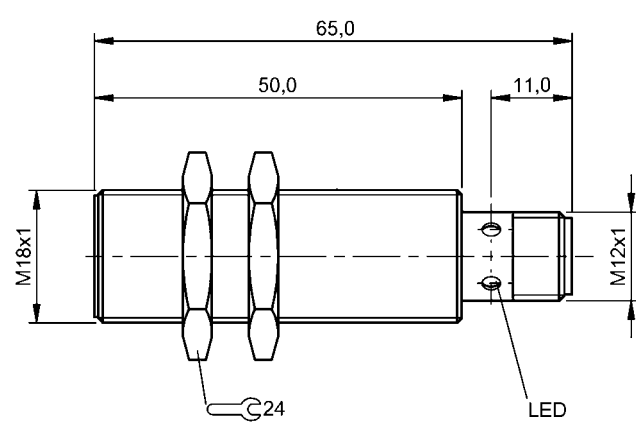

Basic features

Additional features	Weld immune
Approval/Conformity	CE cULus WEEE
Base type deviation	Ceramic coating
Basic standard	IEC 60947-5-2

Display/Operation

Function indicator	yes
Power indicator	no

Electrical connection

Connection	M12x1-Male, 4-pin, A-coded
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Load capacitance max. at Ue	0.5 μ F
Magnetic field strength, interference field	100 kA/m
Min. operating current Im	0 mA
No-load current Io max., damped	9 mA
No-load current Io max., undamped	6 mA
Operating voltage Ub	10...30 VDC
Output resistance Ra	33.0 kOhm + D
Protection class	II
Rated insulation voltage Ui	250 V AC
Rated operating current Ie	200 mA
Rated operating voltage Ue DC	24 V
Rated short circuit current	100 A
Ready delay tv max.	15 ms
Residual current Ir max.	20 μ A
Ripple max. (% of Ue)	10 %
Switching frequency	50 Hz
Utilization category	DC -13
Voltage drop static max.	2.5 V

Environmental conditions

Ambient temperature	5...60 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 gn, 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP67
Magnetic field immune	magnetic field immune (AC/DC)

Interface

Switching output	PNP normally open (NO)
------------------	------------------------

Inductive Sensors
BES M18MI-PSC70B-S04G-W01
Order Code: BES02KE



Material

Housing material	Brass, PTFE coated
Material sensing surface	ceramic coated

Mechanical data

Dimension	Ø 18 x 65 mm
Installation	for flush mounting
Size	M18x1
Tightening torque	12 Nm

Range/Distance

Assured operating distance Sa	5.5 mm
Hysteresis H max. (% of Sr)	20.0 %
Rated operating distance Sn	7 mm
Real switching distance sr	7 mm
Repeat accuracy max. (% of Sr)	5.0 %
Switching distance marking	■ ■
Temperature drift max. (% of Sr)	15 %
Tolerance Sr	±10 %

Remarks

Sn: reduced by the coating thickness of 0.2 mm.
The sensor is functional again after the overload has been eliminated.

Connector Drawings



Wiring Diagrams

