


Inductive Sensors
BES M05EG-NSC08B-BP00,2-GS49
Order Code: BES0315



1) Sensing surface

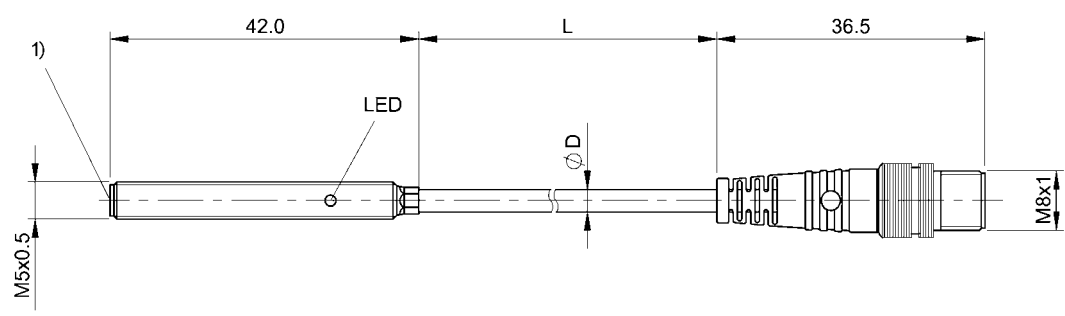

Basic features

Approval/Conformity	CE
	UKCA
	cULus
	WEEE
Basic standard	IEC 60947-5-2

Display/Operation

Function indicator	yes
Power indicator	no

Electrical connection

Cable diameter D	3.00 mm
Cable length L	0.2 m
Connection	M8x1-Male, 3-pin
Connection type	Cable with connector, 0.20 m, PUR
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Load capacitance max. at Ue	0.2 μ F
Min. operating current Im	1 mA
No-load current Io max., damped	10 mA
No-load current Io max., undamped	3 mA
Operating voltage Ub	10...30 VDC
Output resistance Ra	Open collector
Rated insulation voltage Ui	75 V DC
Rated operating current Ie	100 mA
Rated operating voltage Ue DC	24 V
Rated short circuit current	100 A
Ready delay tv max.	25 ms
Residual current Ir max.	80 μ A
Ripple max. (% of Ue)	10 %
Switching frequency	3000 Hz
Utilization category	DC -13
Voltage drop static max.	3 V

Environmental conditions

Ambient temperature	-25...70 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 gn, 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP67

Interface

Switching output	NPN normally open (NO)
------------------	------------------------

Inductive Sensors
BES M05EG-NSC08B-BP00,2-GS49
Order Code: BES0315



Material

Housing material	Stainless steel
Material jacket	PUR
Material sensing surface	Ceramic

Mechanical data

Dimension	Ø 5 x 42 mm
Installation	for flush mounting
Pressure rating max.	10 bar
Pressure rating, note	oil pressure rated
Size	M5x0.5
Tightening torque	1 Nm ±10 %

Range/Distance

Assured operating distance Sa	0.65 mm
Hysteresis H max. (% of Sr)	15.0 %
Rated operating distance Sn	0.8 mm
Real switching distance sr	0.8 mm
Repeat accuracy max. (% of Sr)	5.0 %
Temperature drift max. (% of Sr)	10 %
Tolerance Sr	-10 %/+40 %

Remarks

EMC: EMC protection circuit required, see 825345. Burst: 1.2 IVW: 2.2
The sensor is functional again after the overload has been eliminated.

Connector Drawings



Wiring Diagrams

