


Photoelectric Sensors
BOS 23K-GI-RE10-S4
Order Code: BOS016J

BALLUFF



1) Output function/Error, 2) Power/setting mode, 3) Sn, light/dark, 4) Optical axis, 5) rotatable 270°, 6) Alignment good/limit area

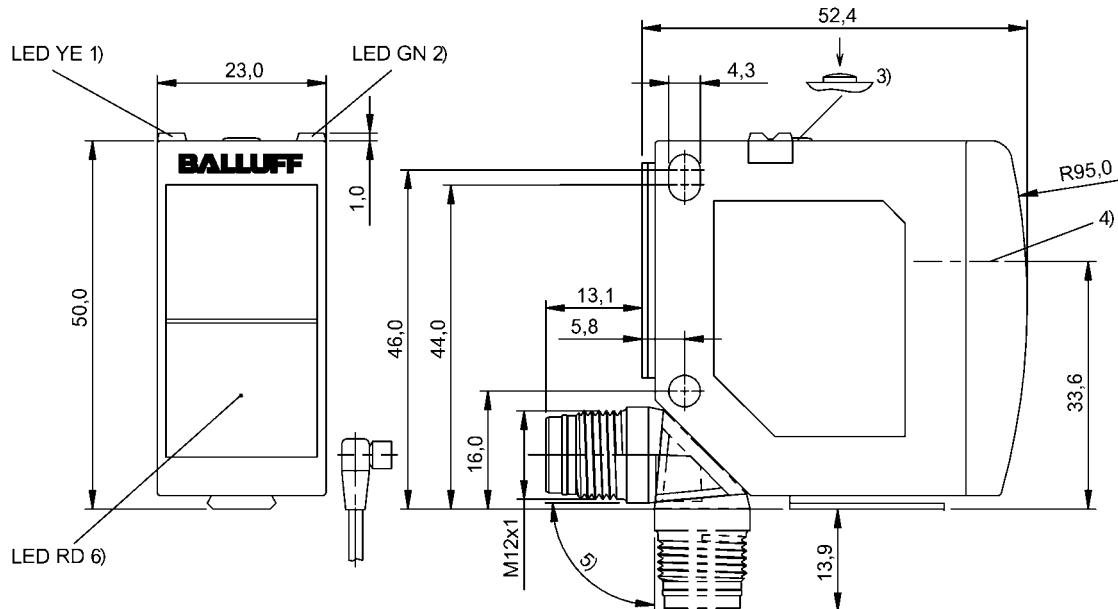

Basic features

Approval/Conformity	Ecolab CE cULus WEEE
Basic standard	IEC 60947-5-2
Principle of operation	Photoelectric sensor
Reference emitter	BOS 23K-XI-RS11-S4
Series	23K
Style	Square Connection can be rotated

Display/Operation

Adjuster	button
Display	Output function- LED yellow Orientation good - LED red LED green: Power Teach - LED yellow+green, alt. Setting NO/NC - LED green, flashing Error - LED yellow, flashing Limit range - LED red, flashing
Setting	Rated switching distance (Sn) Light-on/dark-on

Electrical connection

Connection	Connector, M12x1-Male, 4-pin
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Input function	Key disable on/off Same function as button
No-load current $I_{0 \max}$ at U_e	30 mA
Operating voltage U_b	18...30 VDC
Rated operating current I_e	100 mA
Rated operating voltage U_e DC	24 V
Ready delay t_{V} max.	300 ms
Residual current I_r max.	50 μ A
Ripple max. (% of U_e)	10 %
Switching frequency	500 Hz
Turn-off delay t_{off} max.	1 ms
Turn-on delay t_{on} max.	1 ms
Voltage drop U_d max. at I_e	2 V

Environmental conditions

Ambient temperature	-20...60 °C
EN 60068-2-27, Shock	Half-sinus, 30 g _n , 11 ms, 3x6
EN 60068-2-6, Vibration	10...55 Hz, amplitude 0.5 mm, 3x30 min
IP rating	IP6x
IP rating per DIN 40050	IPx9K

Functional safety

MTTF (40 °C)	494 a
---------------------	-------

IO-Link

IO-Link Profil IDs	0x0006 SSP2.3
---------------------------	---------------

Remarks

The sensor is functional again after the overload has been eliminated.
Actuation object (target): gray card, 200 x 200, 90 % remission, lateral approach
Teach-in also possible when object is in motion.
For additional information, refer to user's guide.
Order accessories separately.
Do not press key using a pointed tool.
For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.


Connector Drawings



Photoelectric Sensors
BOS 23K-GI-RE10-S4
Order Code: BOS016J

BALLUFF

Wiring Diagrams



Opto Symbols

