



Mechanical Cam Switches
BNS 819-D04-D12-100-10-FD-S80S
Order Code: BNS00FM

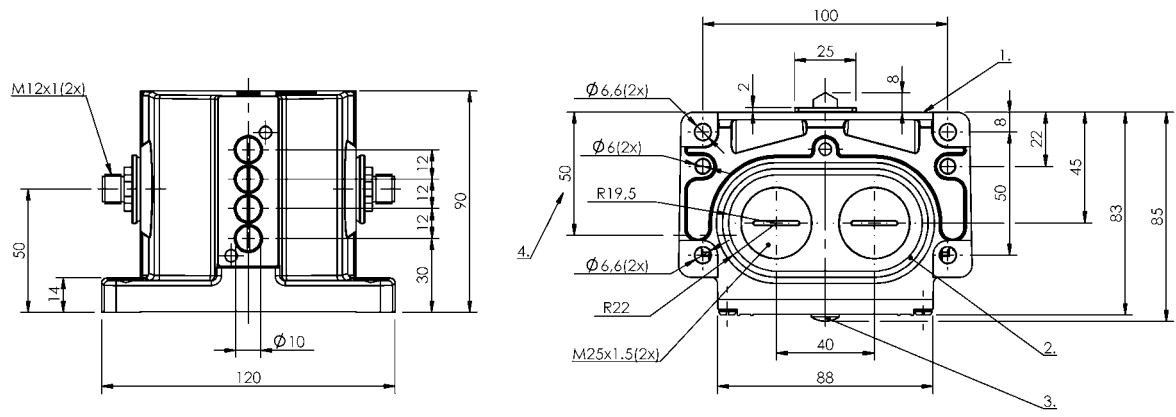

1) Reference edge, 2) Sealing ring, 3) Function indicator FD/FE/LL, 4) Cable passage



Basic features

Approval/Conformity	CE UKCA CCC WEEE
Basic standard	IEC 60947-5-1
DIN switch	DIN 43697
Operating principle	1-4. Switch position: Mechanical
Version	Snap contact

Display/Operation

Function indicator	1-4. Switch position: FD - 6...60 V
--------------------	-------------------------------------

Electrical connection

Connection	M12x1-Flange male, 5-pin
Connection type	1. Switch position: Connector

Electrical data

Connector, order code	BKS-S 80-W-PU-05 (right-angle) BKS-S 80-G-PU-05 (straight)
Continuous current	1-4. Switch position: 4 A
Rated operating voltage Ue	1-4. Switch position: 6...60 V
Switching function mechanical	Dual changeover One NO and one NC galvanically isolated Double-interrupting
Switching rate	1-4. Switch position: 300/min

Environmental conditions

Ambient temperature	-5...85 °C
IP rating	IP67

Functional safety

B10d (EN ISO 13849-1)	BSE 30.0: 30 mil. switching cycles
-----------------------	------------------------------------

Material

Housing material	Aluminium, Anodized
Housing material, surface protection	Anodized
Material contacts	1-4. Switch position: Silver, gold plated
Plunger material	1-4. Switch position: 1.4034 stainless steel

Mechanical Cam Switches
BNS 819-D04-D12-100-10-FD-S80S
Order Code: BNS00FM



Mechanical data


Approach direction	longitudinal, parallel to attachment surface
Approach speed	1-4. Switch position: 40 m/min
Dimension	120 x 90 x 85 mm
Distance cam - reference edge	1-4. Switch position: 4.50...5.00 mm
Flange, feed-through	2 threaded exit M25
Installation	Vertical
Life expectancy mechanical	1-4. Switch position: 30 mil. switching operations

Number of switching positions	4x Chisel Mechanical
Plunger spacing 1st switch position	30 mm
Plunger style	1-4th switch position: Chisel
Switch actuation force	1-4. Switch position: 20 N
Switching element	1-4. Switch position: BSE 30.0

Range/Distance

Reproducibility	1-4. Switch position: ± 0.002 mm
Switch position spacing	12 mm

Connector Drawings



View of connector side

Mechanical Cam Switches
BNS 819-D04-D12-100-10-FD-S80S
Order Code: BNS00FM



Wiring Diagrams

