


Capacitive Sensors
BCS M12B4E2-PSC80H-S04K
Order Code: BCS00P4



1) Sensing surface, 2) Housing, 3) Cover, 4) Potentiometer, 5) LED Power, 6) LED function indicator

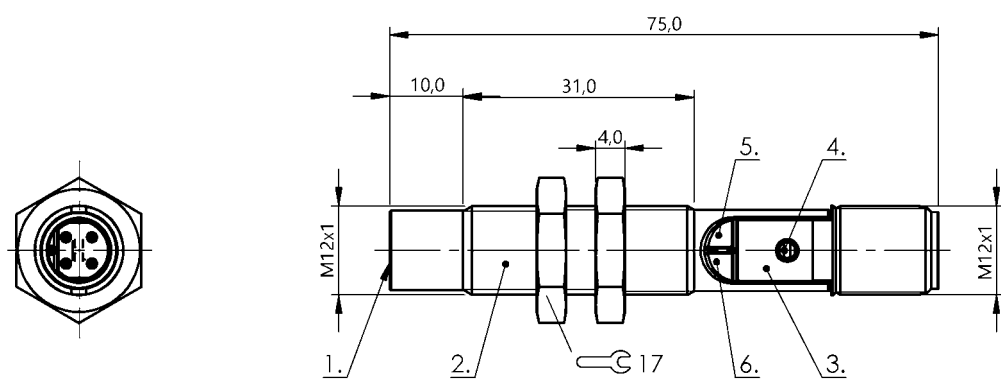

Basic features

Approval/Conformity	CE UKCA cULus WEEE
Basic standard	IEC 60947-5-2
Scope of delivery	Nut (2x)
Sensitivity	Switching distance adjustable
Series	M12
Trademark	Global

Display/Operation

Function indicator	yes
Power indicator	yes

Electrical connection

Connection	M12x1-Male, 3-pin, A-coded
Polarity reversal protected	yes
Protection against device mix-ups	no
Short-circuit protection	yes

Electrical data

No-load current I ₀ max. at U _e	20 mA
Operating voltage U _b	10...30 VDC
Rated insulation voltage U _i	75 V DC
Rated operating current I _e	100 mA
Rated operating voltage U _e DC	24 V
Ready delay t _v max.	300 ms
Ripple max. (% of U _e)	10 %
Switching frequency	100 Hz
Utilization category	DC -13
Voltage drop static max.	1.5 V

Environmental conditions

Ambient temperature	-25...85 °C
Contamination scale	2
IP rating	IP67

Functional safety

MTTF (40 °C)	226 a
--------------	-------

Interface

Switching output	PNP normally open (NO)
------------------	------------------------

Material

Cover material	PBT PA
Housing material	1.4305 stainless steel
Material sensing surface	PBT


Mechanical data		Range/Distance	
Dimension	Ø 12 x 75 mm	Hysteresis H max. (% of Sr)	15.0 %
Installation	non-flush	Measuring range	1...8 mm
Size	M12x1	Rated operating distance Sn	8 mm
Thread (A)	M12x1	Repeat accuracy max. (% of Sr)	2.0 %
Tightening torque	8 Nm	Temperature drift max. (% of Sr)	20 % [-5...55 °C]

Remarks

The potentiometer does not have a fixed stop, but can be turned endlessly without destroying anything.
If no change in the switching signal is detected, the potentiometer should be turned forwards or backwards until a signal change occurs at the output.
For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings



Wiring Diagrams

