


Inductive Sensors
BES M08MI-PSC20B-BP03
Order Code: BES003H

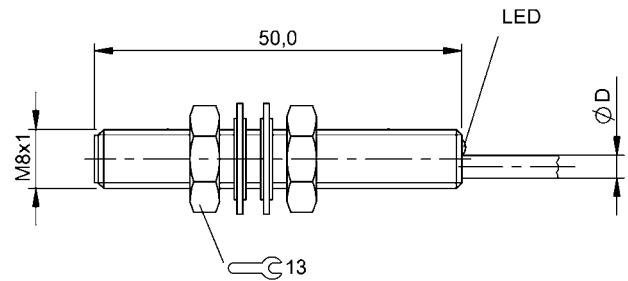

Basic features

Approval/Conformity	CE cULus WEEE
Basic standard	IEC 60947-5-2
Trademark	Global

Display/Operation

Function indicator	yes
Power indicator	no

Electrical connection

Cable diameter D	3.10 mm
Cable length L	3 m
Conductor cross-section	0.14 mm ²
Connection type	Cable, 3.00 m, PUR
Number of conductors	3
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Load capacitance max. at U _e	1 µF
Min. operating current I _m	0 mA
No-load current I _o max., damped	10 mA
No-load current I _o max., undamped	5 mA
Operating voltage U _b	12...30 VDC
Output resistance R _a	33.0 kOhm + D
Rated insulation voltage U _i	75 V DC
Rated operating current I _e	200 mA
Rated operating voltage U _e DC	24 V
Rated short circuit current	100 A
Ready delay t _v max.	30 ms
Residual current I _r max.	20 µA
Ripple max. (% of U _e)	15 %
Switching frequency	700 Hz
Utilization category	DC -13
Voltage drop static max.	2.5 V

Environmental conditions

Ambient temperature	-25...70 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 g _n , 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP67

Interface

Switching output	PNP normally open (NO)
------------------	------------------------

Inductive Sensors
BES M08MI-PSC20B-BP03
Order Code: BES003H



Material

Housing material	Brass, nickel-plated
Material jacket	PUR
Material sensing surface	PA 12

Mechanical data

Dimension	Ø 8 x 50 mm
Installation	for flush mounting
Mounting length	50.00 mm
Size	M8x1
Tightening torque	3 Nm

Range/Distance

Assured operating distance Sa	1.6 mm
Hysteresis H max. (% of Sr)	15.0 %
Rated operating distance Sn	2 mm
Real switching distance sr	2 mm
Repeat accuracy max. (% of Sr)	5.0 %
Switching distance marking	■ ■
Temperature drift max. (% of Sr)	10 %
Tolerance Sr	±10 %

Remarks

Flush: See installation instructions for inductive sensors with extended range 825357.
The sensor is functional again after the overload has been eliminated.

Wiring Diagrams

