


Photoelectric Sensors  
BOS 18M-PI-RE30-S4  
Order Code: BOS01UC

**BALLUFF**



1) Optical axis, 2) Power/short-circuit, 3) Light reception/limit area, 4) Sn

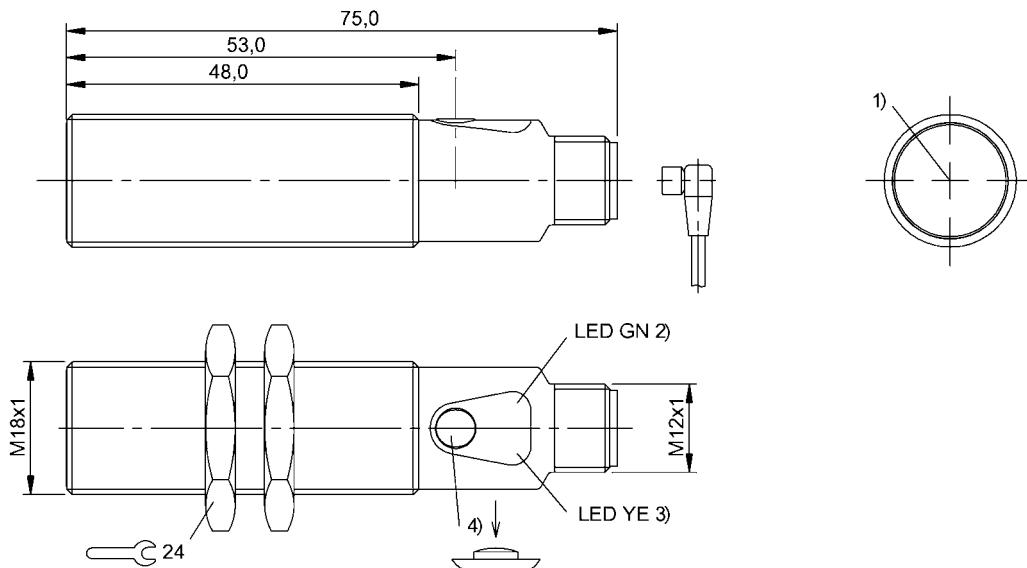

#### Basic features

Approval/Conformity	cULus CE UKCA WEEE
Basic standard	IEC 60947-5-2
Principle of operation	Photoelectric sensor
Reference emitter	BOS 18M-X-RS30-S4 BOS 18M-XI-RS30-S4
Series	18M
Style	Cylinder Straight optics

#### Display/Operation

Adjuster	button
Display	LED green: Power Limit range - LED yellow, flashing Short circuit - LED green, flashing LED yellow: Light received
Setting	Rated switching distance (Sn) Light-on/dark-on

#### Electrical connection

Connection	Connector, M12x1-Male, 4-pin
Contact, surface protection	Gold plated
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

#### Electrical data

Load capacitance max. at Ue	0.3 $\mu$ F
No-load current I <sub>0</sub> max. at Ue	40 mA
Operating voltage U <sub>b</sub>	18...30 VDC
Protection class	II
Rated insulation voltage U <sub>i</sub>	250 V AC
Rated operating current I <sub>e</sub>	100 mA
Rated operating voltage U <sub>e DC</sub>	24 V
Ripple max. (% of U <sub>e</sub> )	15 %
Switching frequency	400 Hz
Turn-off delay t <sub>off</sub> max.	1.25 ms
Turn-on delay t <sub>on</sub> max.	1.25 ms
Utilization category	DC-13
Voltage drop U <sub>d</sub> max. at I <sub>e</sub>	1.5 V

#### Environmental conditions

Ambient temperature	-5...55 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 g <sub>n</sub> , 11 ms, 3x6
EN 60068-2-6, Vibration	10...55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP67

#### Functional safety

MTTF (40 °C)	597 a
--------------	-------

#### IO-Link

IO-Link Profil IDs	0x0001 SSP0
--------------------	-------------

## Interface

Baud rate	38.4 kBaud
Function class, smart sensor	Switching signal channel Teach channel Diagnostics Identification
Interface	IO-Link 1.1
Interface setting option	Key disable on/off Sensor name in application Teach method 2-point/dyn. BDC mode 1-pt./2-pt./window Light-on/dark-on
Process data OUT	Teaching active/inactive Limit range yes/no Switching state active/inactive
Process data cycle min.	3 ms
Profile	Smart Sensor
Switching output	PNP normally open/normally closed (NO/NC)

## Material

Housing material	Brass, nickel-plated
Material sensing surface	Glass
Surface protection	nickel-plated

## Mechanical data

Dimension	Ø 18 x 75 mm
Mounting part	Nut M18x1
Tightening torque max.	15 Nm 30 Nm

## Optical features

Ambient light max.	10000 Lux
Light type	LED, red light
Principle of optical operation	Through-beam sensor (receiver)
Switching function, optical	dark-on/light-on

## Range/Distance

Range	0...20 m
Rated operating distance Sn	20 m Adjustable

## Remarks


Order accessories separately.  
For additional information, refer to user's guide.  
The sensor is functional again after the overload has been eliminated.  
For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

## Connector Drawings



## Wiring Diagrams



Photoelectric Sensors  
BOS 18M-PI-RE30-S4  
Order Code: BOS01UC

**BALLUFF**

Opto Symbols

