
# BCS R08RRE-POM80C-EP00,3-GS75 Order Code: BCS012U



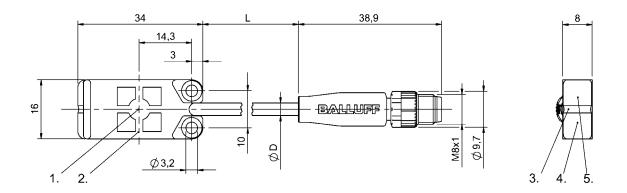

Electrical data

Load capacitance max. at Ue

1) Sensing surface, 2) Housing, 3) Cover, 4) Power indicator green, 5) Function indicator yellow









Basic features	
Approval/Conformity	cULus
	CE
	UKCA
	WEEE
Basic standard	IEC 60947-5-2
Scope of delivery	Holder
	Installation guide
Sensitivity	Switching distance teachable
Series	R08
Trademark	Global
Display/Operation	
Function indicator	yes
Power indicator	yes
Setting	Teachable
Electrical connection	
Cable diameter D	3.40 mm
Cable length L	0.3 m
Conductor cross-section	0.14 mm <sup>2</sup>
Connection	4-pin
Number of conductors	4
Polarity reversal protected	yes
Protection against device mix-ups	yes

yes

·	·
No-load current lo max. at Ue	12.5 mA
Operating voltage Ub	1230 VDC
Rated insulation voltage Ui	75 V DC
Rated operating current le	50 mA
Rated operating voltage Ue DC	24 V
Ready delay tv max.	200 ms
Residual current Ir max.	10 μΑ
Ripple max. (% of Ue)	10 %
Switching frequency	50 Hz
Utilization category	DC -13
Voltage drop static max.	1.5 V
Environmental conditions	
Ambient temperature	-2570 °C
Contamination scale	1
IP rating	IP67
Functional safety	
Functional safety MTTF (40 °C)	98 a
	98 a

 $0.33 \, \mu F$ 

Short-circuit protection

PNP normally closed (NC)

Interface

Switching output

Capacitive Sensors

# BCS R08RRE-POM80C-EP00,3-GS75 Order Code: BCS012U



#### Material

 Cover material
 PP

 Housing material
 PP

 Material jacket
 PUR

 Material sensing surface
 PP

#### Mechanical data

Dimension34 x 16 x 8 mmInstallationfor flush mountingSizeBlock styleTightening torque0.2 Nm

### Range/Distance

Hysteresis H max. (% of Sr)20.0 %Measuring range1...8 mmReal switching distance sr8 mmRepeat accuracy max. (% of Sr)5.0 %Temperature drift max. (% of Sr)20 % [-5...55 °C]

#### Remarks


For full calibration connect input DI to L+ for 2...7 seconds. For empty calibration connect to L+ for 7..12 seconds. Input DI can be used for teaching the switching point. In normal operation input DI should be connected continuously to L-. For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

## **Connector Drawings**




## Wiring Diagrams



**Capacitive Sensors** 

# BCS R08RRE-POM80C-EP00,3-GS75 Order Code: BCS012U



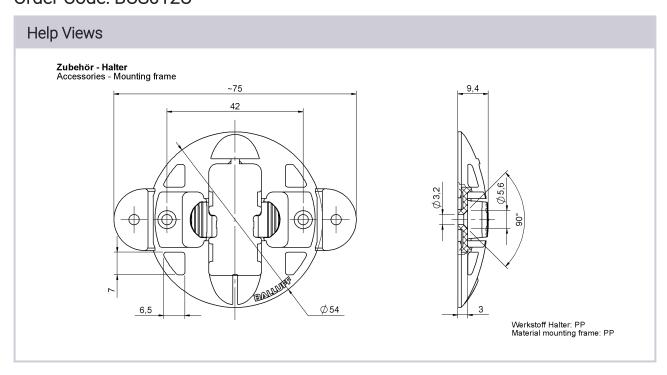

Subject to change without notice: 242160