


Inductive Sensors  
BES 516-300-S262-S4-D  
Order Code: BHS0032

**BALLUFF**



1) O-Ring with thrust ring

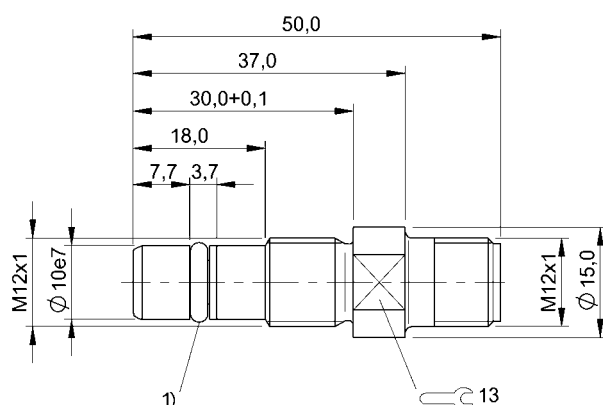

### Basic features

|                     |               |
|---------------------|---------------|
| Approval/Conformity | CE            |
|                     | UKCA          |
| Basic standard      | cULus         |
|                     | WEEE          |
|                     | IEC 60947-5-2 |

### Display/Operation

|                    |    |
|--------------------|----|
| Function indicator | no |
| Power indicator    | no |

### Electrical connection

|                                   |                            |
|-----------------------------------|----------------------------|
| Connection                        | M12x1-Male, 4-pin, A-coded |
| Polarity reversal protected       | yes                        |
| Protection against device mix-ups | yes                        |
| Short-circuit protection          | yes                        |

### Electrical data

|   |             |
|---|-------------|
| Load capacitance max. at Ue                   | 1 µF        |
| Min. operating current I <sub>m</sub>         | 0 mA        |
| No-load current I <sub>o</sub> max., damped   | 8 mA        |
| No-load current I <sub>o</sub> max., undamped | 3 mA        |
| Operating voltage U <sub>b</sub>              | 10...30 VDC |
| Output resistance R <sub>a</sub>              | 150.0 kOhm  |
| Rated insulation voltage U <sub>i</sub>       | 75 V DC     |
| Rated operating current I <sub>e</sub>        | 200 mA      |
| Rated operating voltage U <sub>e</sub> DC     | 24 V        |
| Rated short circuit current                   | 100 A       |
| Ready delay t <sub>v</sub> max.               | 50 ms       |
| Residual current I <sub>r</sub> max.          | 10 µA       |
| Ripple max. (% of U <sub>e</sub> )            | 15 %        |
| Switching frequency                           | 2000 Hz     |
| Utilization category                          | DC -13      |
| Voltage drop static max.                      | 2.1 V       |

### Environmental conditions

|                         |                                       |
|-------------------------|---------------------------------------|
| Ambient temperature     | -25...90 °C                           |
| Contamination scale     | 3                                     |
| EN 60068-2-27, Shock    | Half-sinus, 30 g <sub>n</sub> , 11 ms |
| EN 60068-2-6, Vibration | 55 Hz, amplitude 1 mm, 3x30 min       |
| IP rating               | IP68                                  |

### Functional safety

|              |       |
|--------------|-------|
| MTTF (40 °C) | 855 a |
|--------------|-------|

### Interface

Switching output PNP normally open (NO)

### Material

Housing material Stainless steel  
 Material sensing surface EP  
 Support ring material PTFE

### Range/Distance

Assured operating distance Sa 1.2 mm  
 Hysteresis H max. (% of Sr) 15.0 %  
 Rated operating distance Sn 1.5 mm  
 Real switching distance sr 1.5 mm  
 Repeat accuracy max. (% of Sr) 5.0 %  
 Temperature drift max. (% of Sr) 10 %  
 Tolerance Sr ±10 %

### Mechanical data

Dimension Ø 12 x 50 mm  
 Installation for flush mounting  
 Mounting length 12.00 mm  
 Mounting part M12x1  
 Pressure rating max. 500 bar  
 Pressure rating, note oil pressure rated  
 Sealing ring, size 5.3 x 2.4 mm  
 Size M12x1  
 Tightening torque 20 Nm ±10 %

### Remarks

The sensor is functional again after the overload has been eliminated.  
 Pressure cycle rating: typ. 1 mil. changes 350 bar 90°C on Balluff test stand per BWN Pr. 12.  
 Overvoltage protection using bi-directional Zener diode between Plus (+) and Minus (-).  
 Installation Instructions 614804  
 For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

### Connector Drawings



### Wiring Diagrams

