


Photoelectric Sensors  
BOS 18M-PO-RE21-S4  
Order Code: BOS025J



1) Optical axis, 2) Operating voltage/Error, 3) Sn, 4) Light reception/limit area

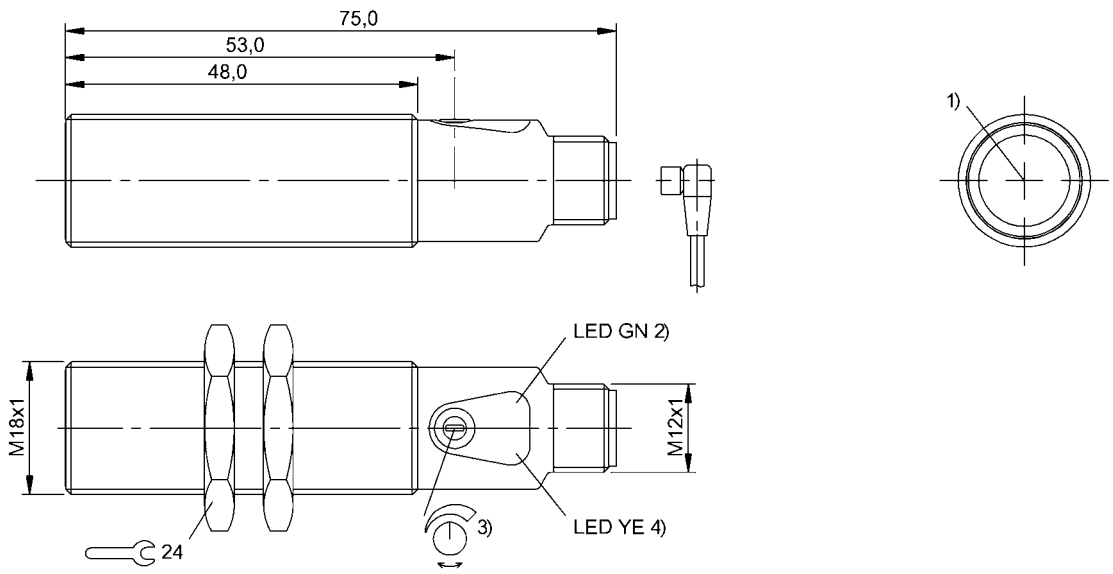

### Basic features

|                        |                             |
|------------------------|-----------------------------|
| Approval/Conformity    | CE<br>UKCA<br>cULus<br>WEEE |
| Basic standard         | IEC 60947-5-2               |
| Principle of operation | Photoelectric sensor        |
| Reference emitter      | BOS 18M-...RS21-..          |
| Scope of delivery      | User manual<br>2x nut M18x1 |
| Series                 | 18M                         |
| Style                  | Cylinder<br>Straight optics |

### Display/Operation

|          |                                                                                                                     |
|----------|---------------------------------------------------------------------------------------------------------------------|
| Adjuster | 1-turn potentiometer                                                                                                |
| Display  | LED green: Power<br>Error - LED green, flashing<br>LED yellow: Light received<br>Limit range - LED yellow, flashing |
| Setting  | Sensitivity (Sn)                                                                                                    |

### Electrical connection

|                                   |                              |
|-----------------------------------|------------------------------|
| Connection                        | Connector, M12x1-Male, 4-pin |
| Contact, surface protection       | Gold plated                  |
| Polarity reversal protected       | yes                          |
| Protection against device mix-ups | yes                          |
| Short-circuit protection          | yes                          |

### Electrical data

|                                                    |             |
|----------------------------------------------------|-------------|
| Load capacitance max. at Ue                        | 0.2 $\mu$ F |
| No-load current I <sub>o</sub> max. at Ue          | 14 mA       |
| Operating voltage U <sub>b</sub>                   | 10...30 VDC |
| Protection class                                   | II          |
| Rated insulation voltage U <sub>i</sub>            | 75 V DC     |
| Rated operating current I <sub>e</sub>             | 100 mA      |
| Rated operating voltage U <sub>e</sub> DC          | 24 V        |
| Ready delay t <sub>v</sub> max.                    | 20 ms       |
| Residual current I <sub>r</sub> max.               | 30 $\mu$ A  |
| Ripple max. (% of U <sub>e</sub> )                 | 15 %        |
| Switching frequency                                | 800 Hz      |
| Turn-off delay t <sub>off</sub> max.               | 0.63 ms     |
| Turn-on delay t <sub>on</sub> max.                 | 0.63 ms     |
| Utilization category                               | DC -13      |
| Voltage drop U <sub>d</sub> max. at I <sub>e</sub> | 2.5 V       |

### Environmental conditions

|                         |                                                                                                 |
|-------------------------|-------------------------------------------------------------------------------------------------|
| Ambient temperature     | -5...55 °C                                                                                      |
| Contamination scale     | 3                                                                                               |
| EN 60068-2-27, Shock    | Half-sinus, 30 g <sub>n</sub> , 11 ms, 3x6<br>Half-sinus, 100 g <sub>n</sub> , 2 ms, 3x8000     |
| EN 60068-2-6, Vibration | 10...55 Hz, amplitude 1 mm, 3x30 min<br>10...2000 Hz, amplitude 1 mm, 30 g <sub>n</sub> , 3x5 h |
| IP rating               | IP67                                                                                            |

Photoelectric Sensors  
BOS 18M-PO-RE21-S4  
Order Code: BOS025J



Functional safety

|              |        |
|--------------|--------|
| MTTF (40 °C) | 1208 a |
|--------------|--------|

Interface

|                  |                                |
|------------------|--------------------------------|
| Switching output | PNP normally closed (NC) Pin 2 |
|------------------|--------------------------------|

Material

|                                      |                      |
|--------------------------------------|----------------------|
| Housing material                     | Brass, nickel-plated |
| Housing material, surface protection | nickel-plated        |
| Material sensing surface             | Glass, anti-glare    |
| Surface protection                   | nickel-plated        |

Mechanical data

|                        |              |
|------------------------|--------------|
| Dimension              | Ø 18 x 75 mm |
| Mounting part          | Nut M18x1    |
| Tightening torque max. | 15 Nm        |
|                        | 30 Nm        |

Optical features

|                                |                                |
|--------------------------------|--------------------------------|
| Ambient light max.             | 10000 Lux                      |
| Light type                     | LED, red light                 |
| Principle of optical operation | Through-beam sensor (receiver) |
| Switching function, optical    | Light-on                       |

Range/Distance

|                             |                 |
|-----------------------------|-----------------|
| Range                       | 0...20 m        |
| Rated operating distance Sn | 20 m Adjustable |

Remarks


Order accessories separately.  
For additional information, refer to user's guide.  
The sensor is functional again after the overload has been eliminated.  
For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings



Wiring Diagrams



Opto Symbols

