

MXG SERIES LED DRIVERS

DL-75WK-A/P-MXG SPEC V2.0

Features

- Class II structure
- Input voltage: 120-277 V ~ 50/60 Hz
- Efficiency :89%(Typ.)
- Constant power drive and constant current output control mode
- Metal shell structure, protection grade: IP67
- Lightning protection level: differential mode 6kV,
- Function selection:
 - Output current is adjusted by external potentiometer (A version only)
 - Input over-voltage protection (P version only)
 - Isolated 3 in 1 dimming (P version only)
- Lifetime design: 5 years



Applications

Road lighting、Industrial lighting、Venue lighting
 Floodlight lighting、Landscape lighting 、Plant lighting

Model list

Model NO.	Input voltage	Output power	Output voltage	Output current range	The default current	Eff. (Typ.)	T.H.D	PF
DL-75WK-V56A-MXG	120-277V	75W	25-56Vdc	0.85-2.1A	1.8A	≥88%	≤10%	≥0.95
DL-75WK-V56P-MXG	50/60Hz							
DL-75WK-V108A-MXG	120-277V	75W	54-108Vdc	0.5-1.05A	0.7A	≥89%	≤10%	≥0.95
DL-75WK-V108P-MXG	50/60Hz							

- Note:**
1. Test conditions of the above parameters: Ta=25℃, 230Vac input, full load operation for 30 minutes;
 2. When the input is less than 108Vac±10%, the output power gradually decreases.When the input 120-277Vac, rated power 75W.
 Please refer to “THE OUTPUT POWER VS INPUT VOLTAGE” curve chart for details.
 3. The P version can be optionally equipped with input over-voltage protection function.

Input characteristics

Parameter	Min	Typ.	Max	Note	AbN automation
Rated input voltage	120Vac	230Vac	277Vac		
Input voltage range	108Vac	-	305Vac		
Rated frequency	47Hz	50/60Hz	63Hz		
Power factor	0.95	-	-	@230Vac full load, rated input voltage	
T.H.D.	-	-	10%	@230Vac full load	
Input current	-	-	0.8A	@120Vac full load	
Inrush current	-	-	70A	230Vac, cold start (25℃)	

Output characteristic

Parameter	Min	Typ.	Max	remark
Efficiency@120Vac				
DL-75WK-V56A/P-MXG	84%	86%	-	full load @120Vac
DL-75WK-V108A/P-MXG	85%	87%		
Efficiency@230Vac				
DL-75WK-V56A/P-MXG	86%	88%	-	full load@230Vac
DL-75WK-V108A/P-MXG	87%	89%		
Output voltage range				
DL-75WK-V56A/P-MXG	25V	-	56V	
DL-75WK-V108A/P-MXG	54V	-	108V	
No-load voltage				
DL-75WK-V56A/P-MXG	-	-	75V	
DL-75WK-V108A/P-MXG	-	-	140V	
Output current range				
DL-75WK-V56A/P-MXG	0.85A	-	2.1A	
DL-75WK-V108A/P-MXG	0.5A	-	1.05A	
Output Current Ripple	-	5%Iomax	-	100% load, 20 MHz BW; Ripple =rms/ average
Accuracy of output current	-5%	-	+5%	full load
Rated power(90-120Vac)	-	37.5W	75W	The derating begins when the input voltage is less than 108Vac ±10%
Rated power(120-277Vac)	-	75W	-	
Line regulation	-3%	-	+3%	full load
Load regulation	-3%	-	+3%	full load
Starting time	300ms	-	1000ms	Full load@120-277Vac

Three



Note:

- 1.The output current range is limited by the input and output voltage, please refer to "I-V WORKING AREA" for details.
- 2.When the output voltage is within the constant power range, the current precision is -5% to +5%; when the output voltage is below the constant power range, the current precision is -10% to +10%

Dimming characteristic

Dimming function		Min	Typ.	Max	Instructions
0-10V Dimming (Optional)	Safe applied voltage range	0V	-	12V	When the external voltage is $\geq 12V$, the dimming will fail
	Dimming output range	10%	-	100%	-
	Rated dimming voltage range	0V	-	10V	It can be set to negative dimming mode through program setting
PWM Dimming (Optional)	PWM high level	9.5V	-	10.5V	-
	PWM low level	0V	-	0.3V	-
	PWM frequency scope	300Hz	-	2000Hz	-
	PWM duty cycle	10%	-	99%	Output full power at 99% duty cycle
Resistor Dimming (Optional)	External resistance value	0K Ω	-	100K Ω	-
	Dimming output range	0%	-	100%	-
Multiple time-controlled dimming (optional)	MCU control	Set segment dimming function through program			Working mode
	Timer control	It is divided into six segments by default and can be customized			24H to achieve a cycle

Note:

1. Output current of dimming port: 100uA (typical value);
2. The P version is 1-10V dimming (0V can be turned off). The maximum voltage of the dimming port is 12V. If the external power supply voltage exceeds 12V or the signal cable is inverted, the power supply will be damaged;
3. Dimming default setting is three in one positive logic dimming (programmable software can be set to timing dimming, 0-5V or other voltage dimming);
4. When set to positive logic dimming function, the 0V dimming is turned off, and the output voltage is $0.46 \cdot V_{omax}$ after the dimming is turned off. Be careful when using this function, but customers are advised to use 1-10V dimming.
5. When setting negative logic dimming, the default output is 100% when the dimming is suspended. Negative logic dimming cannot be turned off. When the port voltage of the dimming is greater than 10.5V, the maximum power output of the power supply will be achieved.

Protection

Function		Function instructions				AbN automatic
Input over-voltage protection (P version only)	Input over-voltage protection	Min	Typ.	Max	Note	
		320Vac	340Vac	350Vac	If the input voltage exceeds the protection voltage, the output is turned off	
	Input over-voltage recovery	Min	Typ.	Max	Note	
		300Vac	320Vac	340Vac	When the input voltage drops below the recovery voltage, the power supply will automatically resume normal operation	
Input under-voltage protection		When the input voltage is less than 108Vac ±10%, the output power gradually decreases.				
Output overload protection		Protection mode:hiccup mode,recovers automatically after fault condition is removed.				
Output short circuit protection		Hiccup mode:recovers automatically after fault condition is removed				
Over temperature protection		Self-recovery type: when the housing temperature is greater than 90℃, the output power decreases gradually.				
Output over-voltage protection		Protection mode: Hiccup mode or clamped in output highest voltage , the product is not damaged, LED driver works normally after fault condition is removed.				

Note:

1. Unless otherwise specified, all specifications and parameters shall be measured at the conditions of 230Vac (50Hz), rated load and 25℃ of ambient temperature;
2. Including setting error, line regulation and load regulation.

Environmental


Environmental categories	Parameter
Working temperature	-40 ~ +55℃ @200-277Vac, -40 ~ +45℃ @120-200Vac
Max.Case Temp.	-40 ~ 90℃
Working humidity	20 ~ 95% RH, non condensing
Storage temperature、 humidity	-40 ~ +80℃, 10 ~ 95% RH
Resistant to vibration	10 ~ 500Hz, 5G 12 min/cycle, X, Y, Z axis 72 min each
MTBF	230Khrs min. MIL-HDBK-217F (Ta=25℃)
Lifetime	100000 hours @Tcase≤75℃,230Vac, 80% Load, Please refer to "Tcase VS Lifetime" curve

Safety and EMC


Safety categories	Standard
Safety	GB19510.1、GB19510.14、EN61347-1、EN61347-2-13、IEC61347-1、IEC61347-2-13、EN 62384
EMC	EN 55015、EN 61000-3-2 、GB/T 17743、GB17625.1、 EN 61000-3-3
Surge protection	Differential mode L-N ±6KV（2 ohm）,Refer to IEC61000-4-5 2014 Criterion B
High-pot test	I/P-O/P:3.75KVac I/P-DIM:1.5KVac O/P-DIM:1.5KVac
Insulation impedance	I/P-O/P:100MΩ / 500VDC / 25℃/ 70% RH
Leakage current	<0.7mA@277Vac

Note:
 The driver is considered as a component that will be operated in combination with the final equipment. Since EMC performance will be affected by the complete installation,the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

I-V Working area

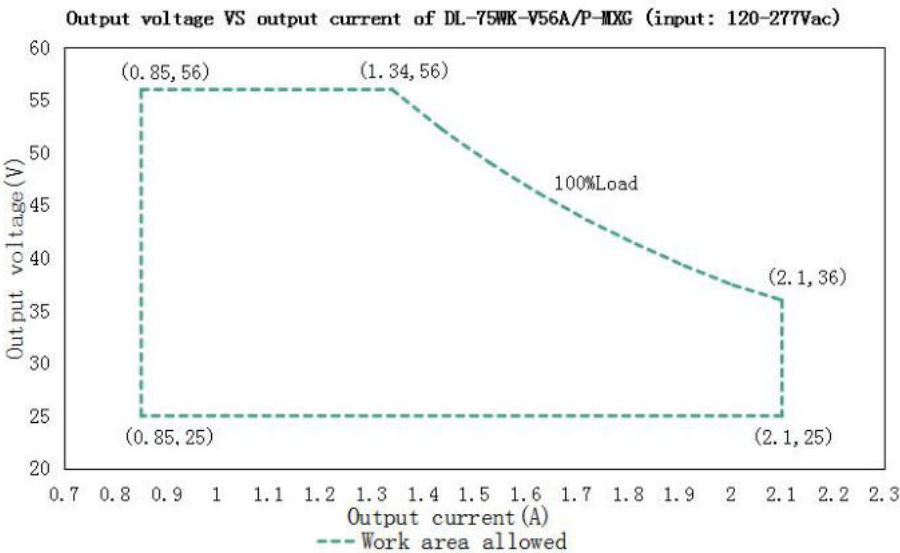


Load	Output								
Load working Voltage	25V	29V	33V	36V	40V	44V	48V	52V	56V
Io_MAX	2.1A	2.1A	2.1A	2.08A	1.88A	1.70A	1.56A	1.44A	1.34A
Po_MAX	52.5W	60.9W	69.3W	75W	75W	75W	75W	75W	75W

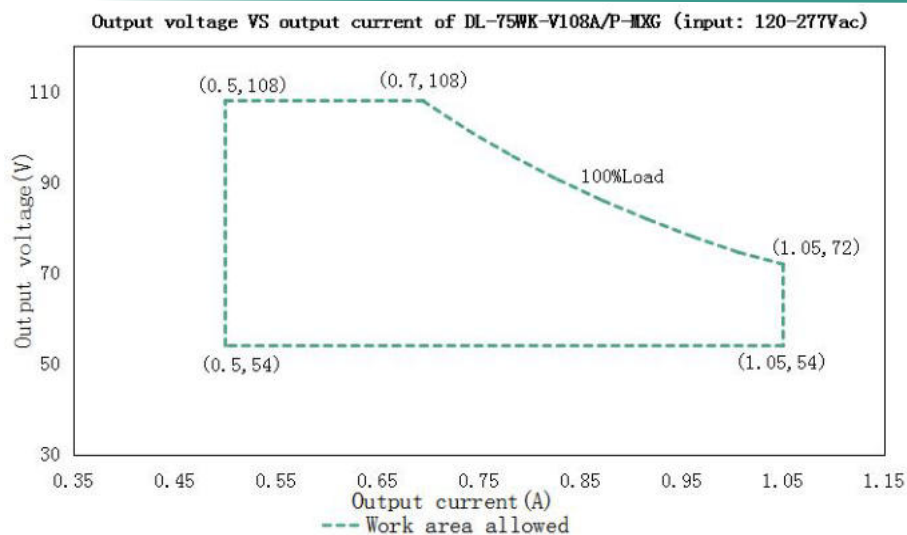


AbN
automation

Load	Output								
Load working Voltage	54V	60V	66V	72V	78V	84V	90V	96V	108V
Io_MAX	1.05A	1.05A	1.05A	1.05A	0.96A	0.89A	0.83A	0.78A	0.7A
Po_MAX	56.7W	63W	69.3W	75.6W	75W	75W	75W	75W	75W


Output power VS Input voltage

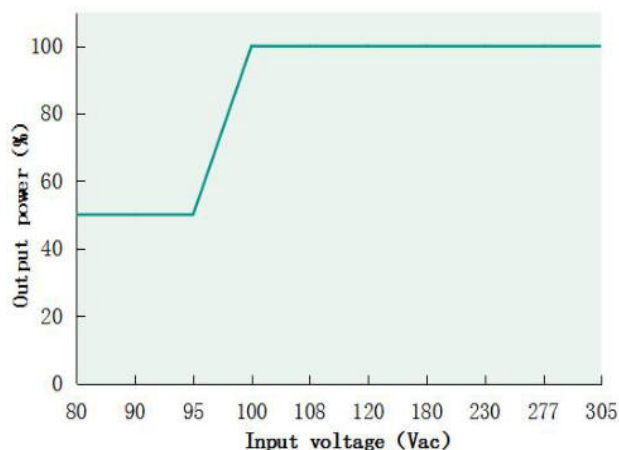


Eff. VS Output voltage(DL-75WK-V108A/P-MXG)

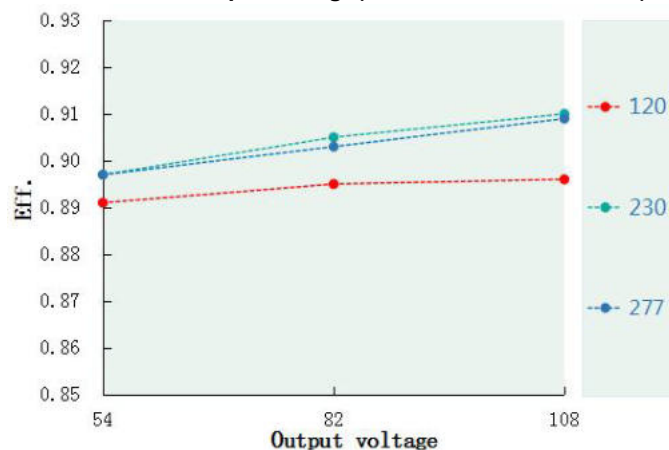


Eff. VS Output voltage(DL-75WK-V56A/P-MXG)

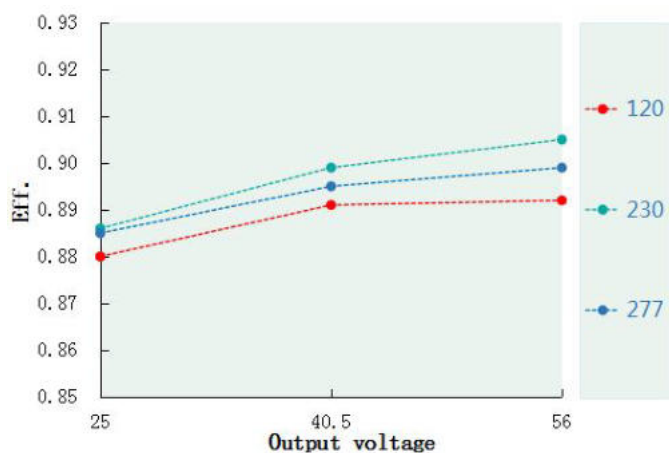


Power factor VS Input voltage(DL-75WK-V56A/P-MXG)

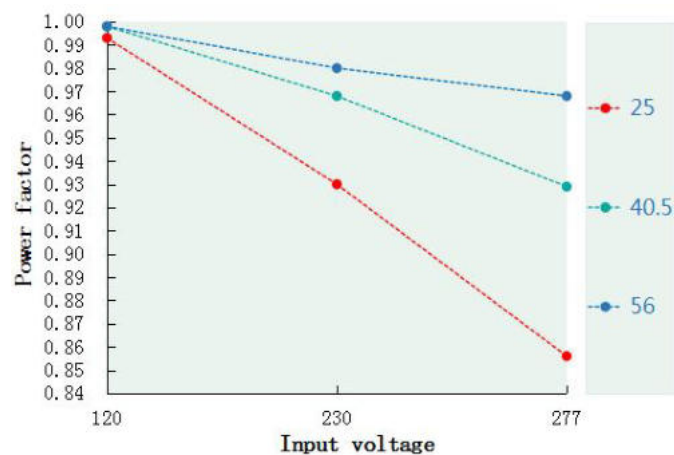


Power factor VS Input voltage(DL-75WK-V108A/P-MXG)

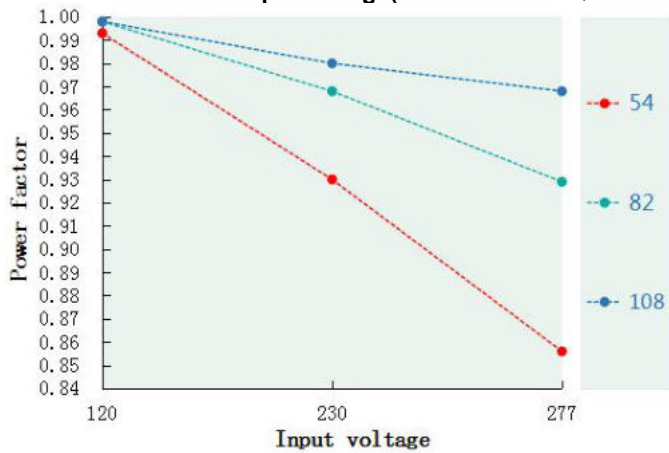


T.H.D. VS Output voltage(DL-75WK-V56A/P-MXG)

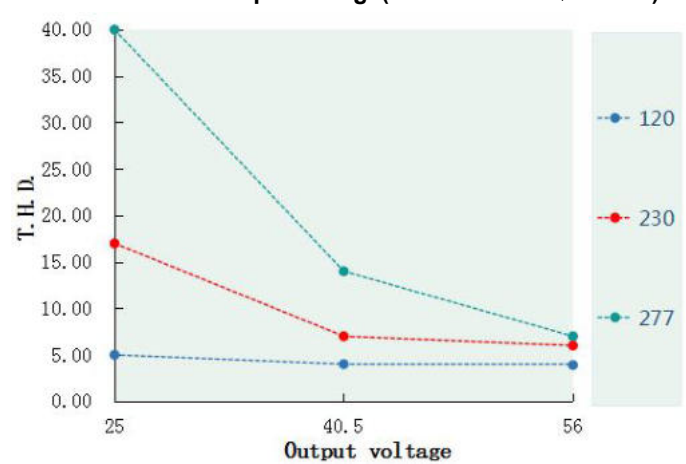


T.H.D. VS Output voltage(DL-75WK-V108A/P-MXG)

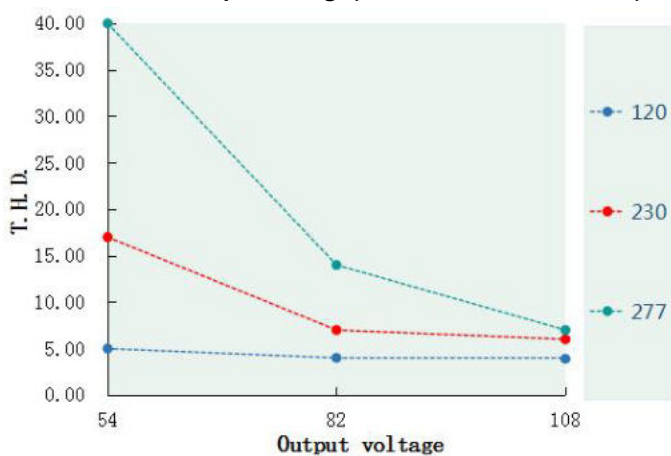


Tcase VS Lifetime

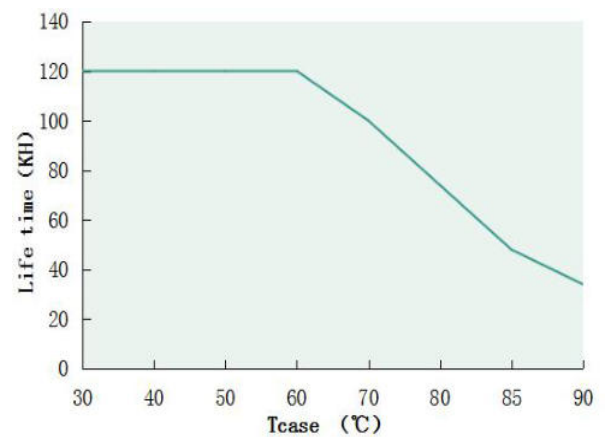

Output power VS Tcase

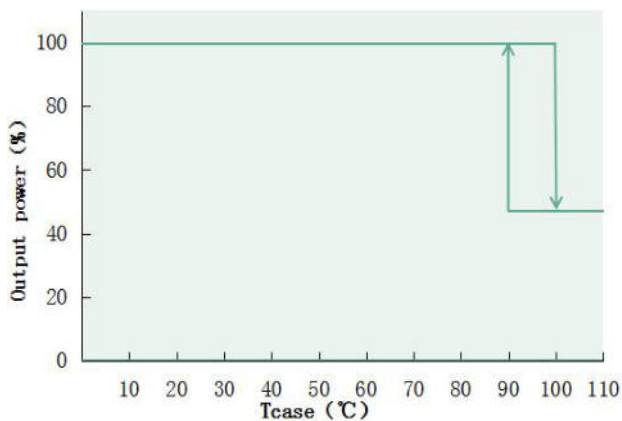

Inrush current

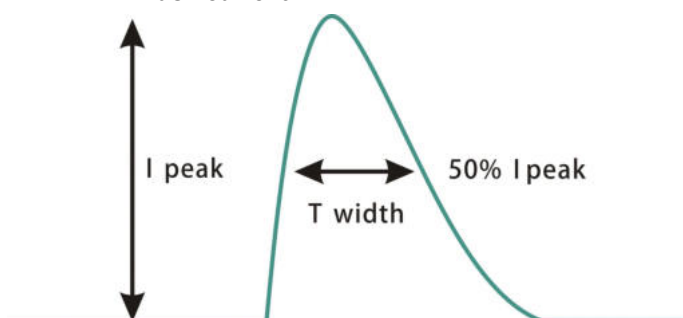

Input voltage	Peak current	T(@50% Peak current)
120Vac	22A	174us
230Vac	42A	172us
277Vac	50.6A	194us



Dimming operation

※ Three-in-one dimming function (X version only)



- A. Connect a resistor 0-100K or 0-10V DC voltage or 10V PWM signal between DIM+ and DIM- to adjust the output current.
- B. Output current of dimming port: 100uA (typical value).

AbN
automation



◎ With an applied voltage of 0-10V:

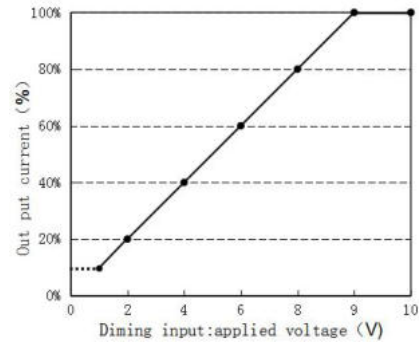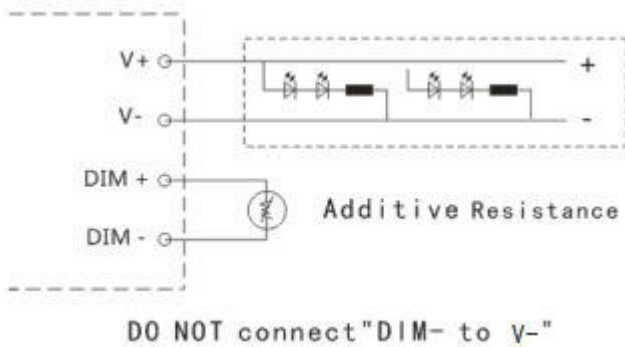

◎ Applying additive 10V PWM signal (Frequency range: 300Hz-2K Hz) :

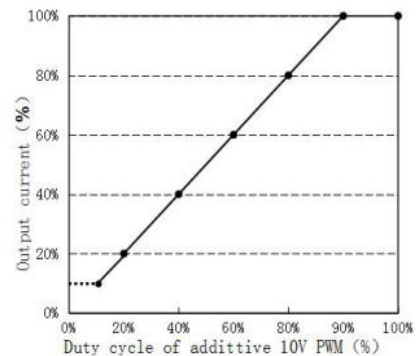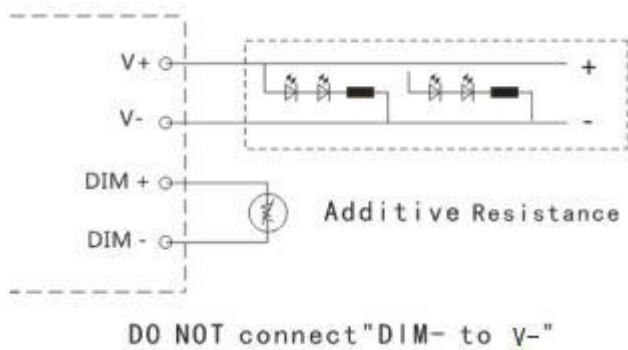

◎ With an additional 0-100K resistor:

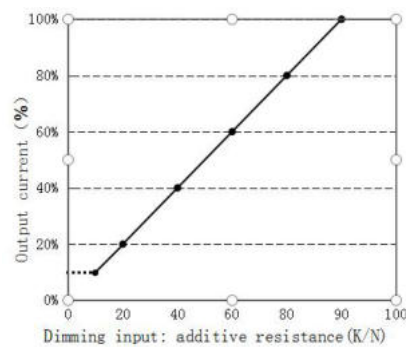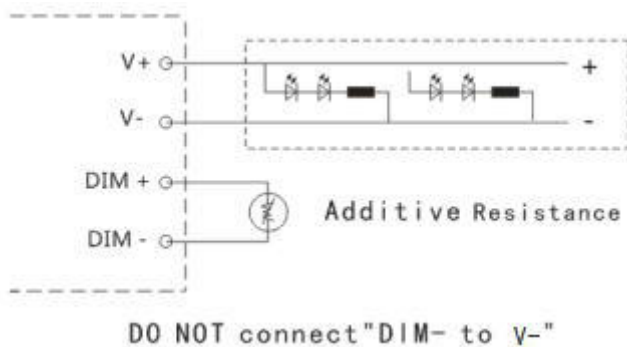

Remark:


1. Positive and negative logic dimming can be programmed.
2. Dimming off only applies to positive logic. For other requirements, please contact technical personnel.

Mechanical specification

Size (mm) L138*W63*H32


DL-75WK-V56A-MXG

DL-75WK-V108A-MXG

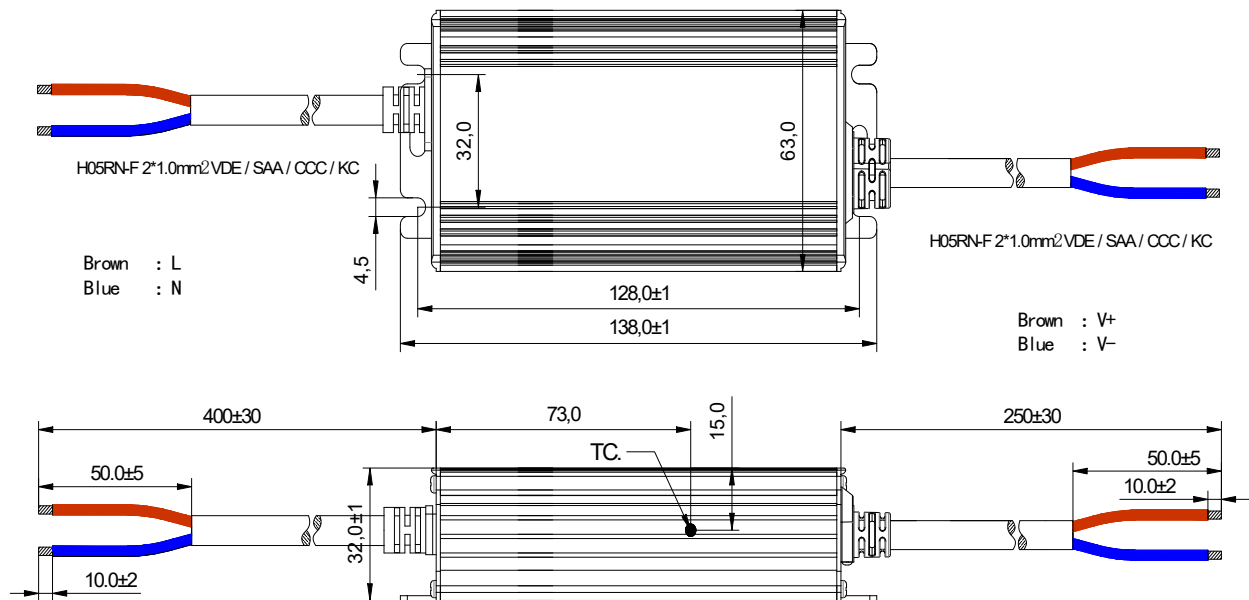

DL-75WK-V56P-MXG

DL-75WK-V108P-MXG

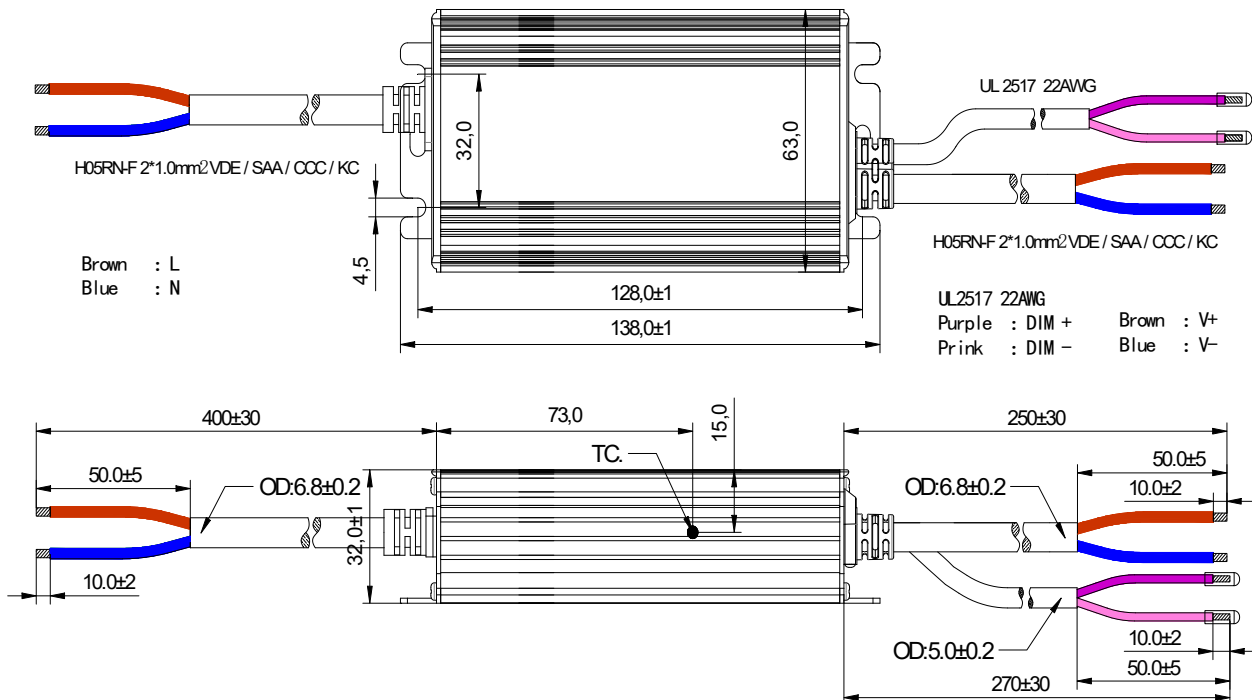

Weight


Weight 480 g

Ten

Packaging

Packaging (mm) L475*W350*H160

AbN
automation

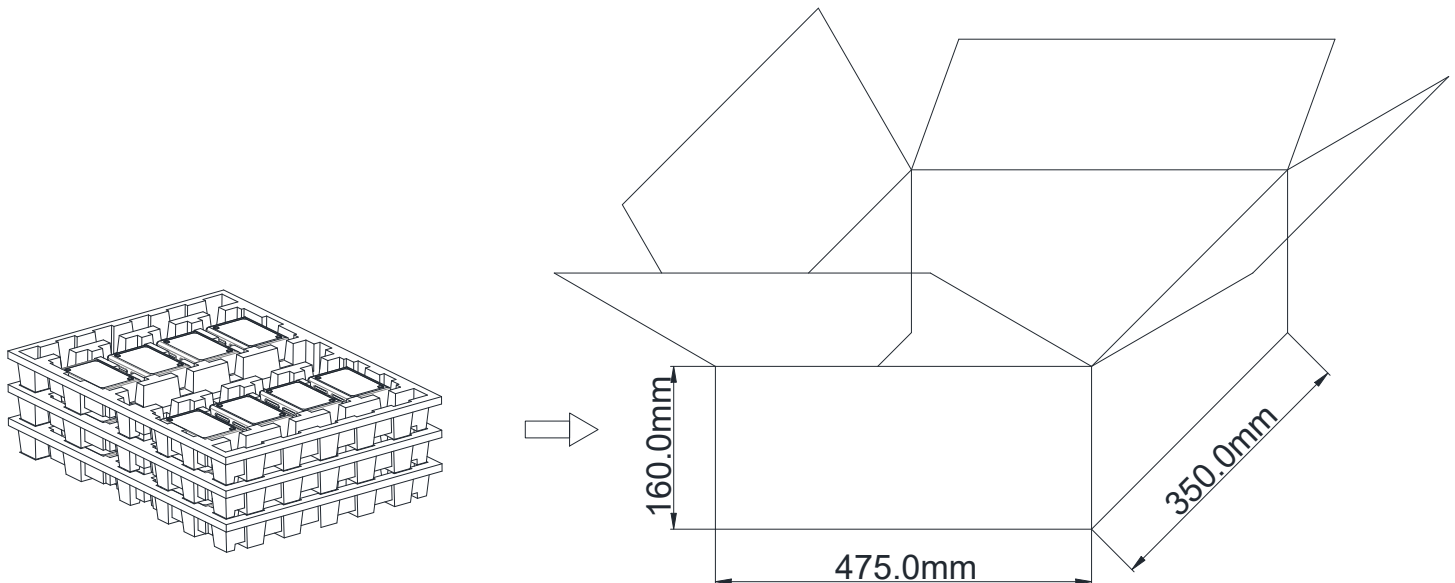

Note: One Carton 3 layers and 8 pcs each layer, total 24pcs/carton.

Note:

1. According to the certificate obtained by the LED DRIVER, the LED DRIVER with the English label is sold in Europe, America and India.
2. The LED DRIVER with Chinese label is only used for China market.

Version

DATE	DESCRIPTION	REV.	CHECK
2023.10.04	Initial version.	V1.0	
2025.1.11	Modify the description of Lifetime and "Tcase VS Lifetime" Curve	V2.0	

MANUFACTRUER		
EDIT	CHECK	APPROVE
肖荣林	郭照康	张明吉