

## IB05C764

### Inductive sensors • Norm switching distance

sensor inductive, M5x0.5 25long, Flush, Sn: 0.8, 10-30V DC, PNP NO, IO-Link, Cable 2m  
PVC, IP67, V2A

including 2x Nut, 2x Toothed washer



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

#### Electrical features

Display	LED display
Type of switching function	Normally open contact (NO)
Type of electrical connection	Cable
Type of switching output	PNP
Rated switching current	200mA
Relative hysteresis	10%
Short-circuit protection	Yes
No-load current	10mA
Line diameter	3.5mm
Relative repeat accuracy	3.75%
Residual ripple	20%
Switching distance	0,8mm
Switching frequency	5000Hz
Voltage drop	2V
Reverse polarity protection	Yes
Operating voltage (DC)	10 - 30V

**Mechanical features**

Number of cores	3
Alignment of cable entry	axial
Design	Cylinder, screw-thread
Thread length	25mm
Thread pitch	0.5mm
Cable length	2m
Cable infeed	axial
Length	25mm
Maximum tightening torque	1.5Nm
Mechanical mounting condition for sensor	flush
Degree of protection (IP)	IP67
Housing material	Stainless steel (V2A)
Material of cable sheath	Plastic (PVC)
Thread dimension	M5
Ambient temperature	-25 - 70°C

**Other features**

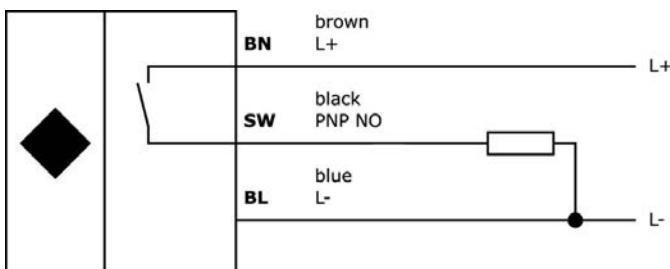
IO-Link version	V1.0.1
Ambient temperature	-25 - 70°C

**Classification**

ETIM 8	EC002714 Inductive proximity switch
--------	-------------------------------------

**More**

IPF Product Group	203 inductive sensors (diverse)
packaging dimensions	220 x 180 x 17 mm
gross weight	42 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

**Connection****Installation**

Mounting / installation may only be carried out by a qualified electrician!

**Disposal**

**Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website [www.ipf-electronic.com](http://www.ipf-electronic.com).

Any software, drivers or IODD files that may be required to operate your device can be downloaded free of charge from our homepage: [www.ipf-electronic.com](http://www.ipf-electronic.com)