

IB08A256

Inductive sensors • Increased switching distance

Sensor inductive, M8x1 46long, flush, Sn: 2, 10-30V diagnostic coverage, PNP NO, cable tail 5m PUR (polyurethane), IP68, V2A

including 2x Nut, 2x Toothed washer



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

Electrical features

Type of switching function	Normally open contact (NO)
Type of electrical connection	Cable
Type of switching output	PNP
Rated switching current	200mA
Line diameter	2.9mm
Switching distance	2mm
Operating voltage (DC)	10 - 30V

Mechanical features

Number of cores	3
Alignment of cable entry	axial
Design	Cylinder, screw-thread
Thread pitch	1mm
Cable length	5m
Cable infeed	axial
Length	46.5mm
Mechanical mounting condition for sensor	flush
Degree of protection (IP)	IP68
Active area material of sensor	Plastic (PBT)
Housing material	Stainless steel
Material of cable sheath	Plastic (PUR)
Maximum torque	8Nm
Thread dimension	M8
Ambient temperature	-25 - 70°C

Other features

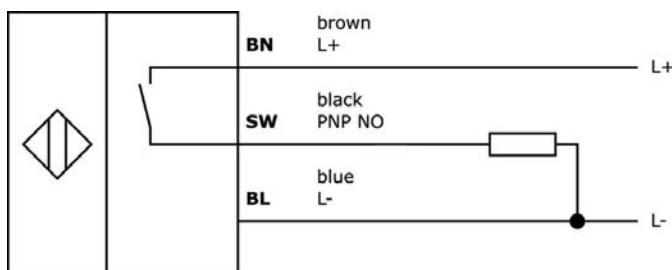
Maximum torque	8Nm
Important note	Zahnscheiben J8 DIN 6797 unbedingt verwenden!
Ambient temperature	-25 - 70°C

Classification

ETIM 8	EC002714 Inductive proximity switch
--------	-------------------------------------

More

IPF Product Group	203 inductive sensors (diverse)
packaging dimensions	123 x 77 x 25 mm
gross weight	90 g
Customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection**Installation**

Mounting / installation may only be carried out by a qualified electrician!

Disposal**Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.