

## IB08A537

### Inductive sensors • Increased switching distance

sensor inductive, M8x1 60long, Quasi-flat, Sn: 3, 10-30V DC, PNP NO, Connector M8, IP67, Stainless steel 1.4305

including 2x Nut



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

#### Electrical features

Type of switching function	Normally open contact (NO)
Type of electrical connection	Connector M8
Type of switching output	PNP
Rated switching current	200mA
Readiness delay	300ms
Relative hysteresis	15%
Short-circuit protection	Yes
Relative repeat accuracy	10%
Residual ripple	10%
Switching distance	3mm
Switching frequency	1000Hz
Voltage drop	2.4V
Reverse polarity protection	Yes
Operating voltage (DC)	10 - 30V

### Mechanical features

Alignment of cable entry	axial
Design	Cylinder, screw-thread
Thread length	46mm
Thread pitch	1mm
Cable infeed	axial
Length	60mm
Mechanical mounting condition for sensor	semi-flush
Degree of protection (IP)	IP67
Active area material of sensor	Plastic (PA6.6)
Housing material	Stainless steel 1.4305
Thread dimension	M8
Ambient temperature	0 - 70°C

### Other features

Ambient temperature	0 - 70°C
---------------------	----------


### Classification

ETIM 8	EC002714 Inductive proximity switch
--------	-------------------------------------

### More

IPF Product Group	201 inductive sensors (plus / super plus)
packaging dimensions	120 x 100 x 8 mm
gross weight	15 g
Customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

### Connection

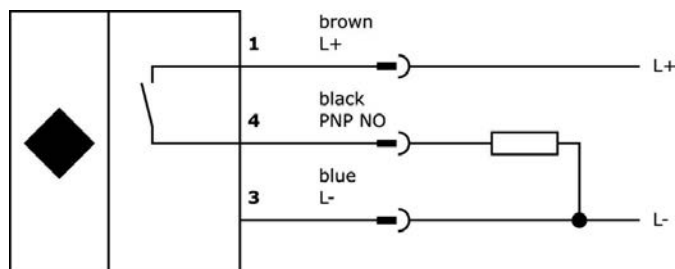

### Installation



Mounting / installation may only be carried out by a qualified electrician!

### Disposal



**Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website [www.ipf-electronic.com](http://www.ipf-electronic.com).