

IB08C150

Inductive sensors • Increased switching distance

sensor inductive, M8x1 30long, Flush, Sn: 2, 10-30V DC, PNP NC, Cable connector M12
2m PVC, IP67, Stainless steel 1.4305

including 2x Nut



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

Electrical features

Type of switching function	Normally closed contact (NC)
Type of electrical connection	Cable connector M12
Type of switching output	PNP
Rated switching current	200mA
Switching distance	2mm
Operating voltage (DC)	10 - 30V

Mechanical features

Alignment of cable entry	axial
Design	Cylinder, screw-thread
Thread pitch	1mm
Cable length	2m
Cable infeed	axial
Length	30mm
Mechanical mounting condition for sensor	flush
Degree of protection (IP)	IP67
Active area material of sensor	Plastic (PBT)
Housing material	Stainless steel 1.4305
Material of cable sheath	Plastic (PVC)
Thread dimension	M8
Ambient temperature	-25 - 70°C

Other features

Ambient temperature	-25 - 70°C
---------------------	------------

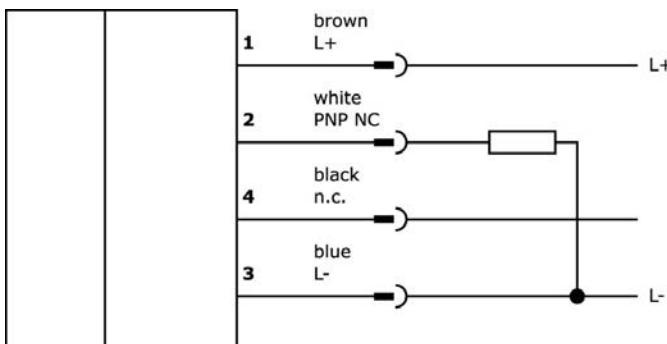
Classification

ETIM 8

EC002714 Inductive proximity switch

More

IPF Product Group	203 inductive sensors (diverse)
packaging dimensions	149 x 124 x 28 mm
gross weight	103 g
Customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection**Installation**

Mounting / installation may only be carried out by a qualified electrician!

Disposal**Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.