

IB090151**Inductive sensors • Increased ambient temperature**

Sensor inductive, 55x8x8mm, flush, Sn: 2, 10-30V diagnostic coverage, 0-140°C, PNP NO, cable tail 5m silicone, IP65, stainl. steel



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

Electrical features

Response/decay time	1ms
Type of switching function	Normally open contact (NO)
Type of electrical connection	Cable
Type of switching output	PNP
Rated switching current	50mA
Readiness delay	60ms
Relative hysteresis	20%
Short-circuit protection	Yes
No-load current	15mA
Line diameter	3.5mm
Relative repeat accuracy	3%
Residual ripple	10%
Switching distance	2mm
Switching frequency	500Hz
Voltage drop	2V
Reverse polarity protection	Yes
Operating voltage (DC)	10 - 30V

Mechanical features

Conductor cross-section	0.14mm ²
Design	Cuboid
Width	8mm
Height	55mm
Cable length	5m
Cable infeed	axial
Length	8mm
Mechanical mounting condition for sensor	flush
Degree of protection (IP)	IP65
Active area material of sensor	Plastic (Vectra®)
Housing material	Stainless steel 1.4305
Material of cable sheath	Silicone
Ambient temperature	0 - 140°C

Other features

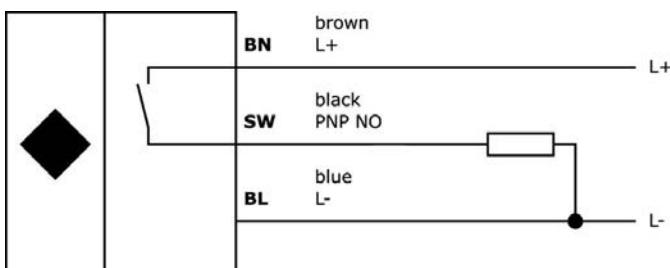
Ambient temperature	0 - 140°C
---------------------	-----------

Classification

ETIM 8	EC002714 Inductive proximity switch
--------	-------------------------------------

More

IPF Product Group	202 inductive sensors (high temperature)
packaging dimensions	123 x 77 x 25 mm
gross weight	110 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection**Installation**

Mounting / installation may only be carried out by a qualified electrician!

Disposal

Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

Dimensional drawing