

IB090176

Inductive sensors • Increased switching distance

sensor inductive, 59x8x8mm, Flush, Sn: 3, 10-30V DC, PNP NO, Connector M8 3pin, IP67, Zamak Chrome-plated



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

Electrical features

Display	LED display
Type of switching function	Normally open contact (NO)
Type of electrical connection	Connector M8
Type of switching output	PNP
Rated switching current	200mA
Relative hysteresis	10%
Short-circuit protection	Yes
No-load current	10mA
Number of pins	3
Switching distance	3mm
Switching frequency	1000Hz
Voltage drop	2V
Reverse polarity protection	Yes
Operating voltage (DC)	10 - 30V

Mechanical features

Design	Cuboid
Width	8mm
Height	59mm
Cable infeed	axial
Length	8mm
Maximum tightening torque	1Nm
Mechanical mounting condition for sensor	flush
Surface	Chrome-plated
Degree of protection (IP)	IP67
Active area material of sensor	Plastic (PBTP)
Housing material	Zamak
Ambient temperature	-25 - 70°C

Other features

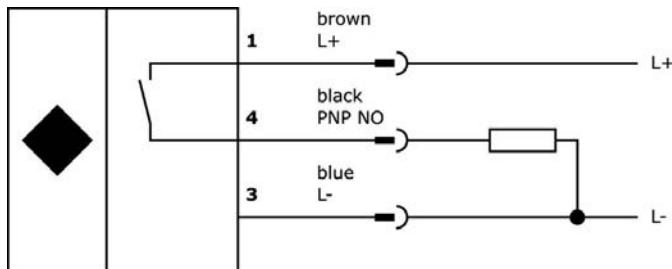
Ambient temperature	-25 - 70°C
---------------------	------------

Classification

ETIM 8	EC002714 Inductive proximity switch
--------	-------------------------------------

More

IPF Product Group	201 inductive sensors (plus / super plus)
packaging dimensions	215 x 180 x 10 mm
gross weight	20 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection**Installation**

Mounting / installation may only be carried out by a qualified electrician!

Disposal

Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

Dimensional drawing

