

IB120129**Inductive sensors • welding-proof**

sensor inductive, M12x1 70long, Flush, Sn: 2, 10-30V DC, PNP NO, Connector M12, IP67, Brass Teflon coated, welding-proof

including 2x Nut



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

Electrical features

Display	LED display
Type of switching function	Normally open contact (NO)
Type of electrical connection	Connector M12
Type of switching output	PNP
Rated switching current	200mA
Short-circuit protection	Yes
Switching distance	2mm
Switching frequency	15Hz
Interference resistance to magnetic fields	Immune against magnetic AC-field
Reverse polarity protection	Yes
Operating voltage (DC)	10 - 30V

Mechanical features

Alignment of cable entry	axial
Design	Cylinder, screw-thread
Thread pitch	1mm
Cable infeed	axial
Length	70mm
Mechanical mounting condition for sensor	flush
Surface	teflon coated
Degree of protection (IP)	IP67
Active area material of sensor	Plastic (PBT)
Housing material	Brass
Thread dimension	M12
Ambient temperature	-25 - 70°C

Other features

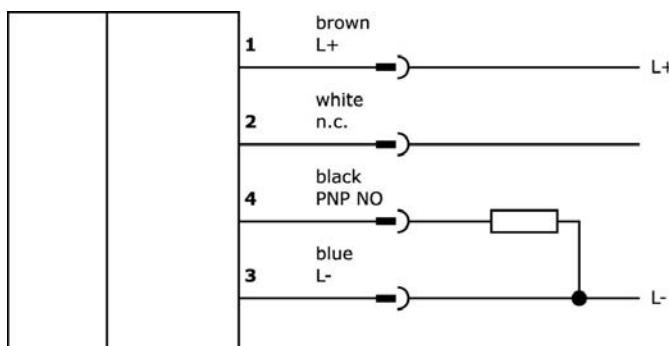
Welding area	Yes
Reference medium / object	Standard measuring plate FE360 12x12x1mm
Ambient temperature	-25 - 70°C

Classification

ETIM 8	EC002714 Inductive proximity switch
--------	-------------------------------------

More

IPF Product Group	207 inductive sensors (welding proof)
packaging dimensions	120 x 100 x 17 mm
gross weight	40 g
Customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection**Installation**

Mounting / installation may only be carried out by a qualified electrician!

Disposal**Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

Dimensional drawing

