

IB12A815

Inductive sensors • Increased ambient temperature

sensor inductive, M12x1 72long, Flush, Sn: 3, 10-35V DC, 0-150°C, PNP NO, Connector M12, IP50, Stainless steel 1.4305

including 2x Nut



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

Electrical features

Type of switching function	Normally open contact (NO)
Type of electrical connection	Connector M12
Type of switching output	PNP
Rated switching current	120mA
Switching distance	3mm
Operating voltage (DC)	10 - 35V

Mechanical features

Alignment of cable entry	axial
Design	Cylinder, screw-thread
Thread length	72mm
Thread pitch	1mm
Cable infeed	axial
Length	72mm
Mechanical mounting condition for sensor	flush
Degree of protection (IP)	IP50
Active area material of sensor	Plastic (Vectra®)
Housing material	Stainless steel 1.4305
Thread dimension	M12
Ambient temperature	0 - 150°C

Other features

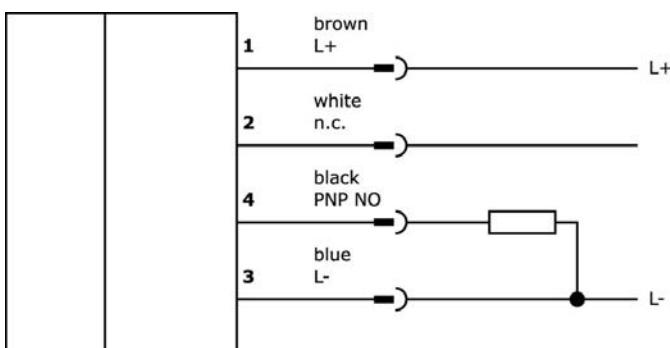
Ambient temperature	0 - 150°C
---------------------	-----------

Classification

ETIM 8	EC002714 Inductive proximity switch
--------	-------------------------------------

More

IPF Product Group	202 inductive sensors (high temperature)
packaging dimensions	120 x 100 x 17 mm
gross weight	40 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection**Installation**

Mounting / installation may only be carried out by a qualified electrician!

Disposal**Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.